

TELEMETRY GROUP

TELEMETRY STANDARDS

WHITE SANDS MISSILE RANGE KWAJALEIN MISSILE RANGE YUMA PROVING GROUND DUGWAY PROVING GROUND ABERDEEN TEST CENTER NATIONAL TRAINING CENTER

ATLANTIC FLEET WEAPONS TRAINING FACILITY
NAVAL AIR WARFARE CENTER WEAPONS DIVISION
NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION
NAVAL UNDERSEA WARFARE CENTER DIVISION, NEWPORT
PACIFIC MISSILE RANGE FACILITY
NAVAL UNDERSEA WARFARE CENTER DIVISION, KEYPORT

30TH SPACE WING
45TH SPACE WING
AIR FORCE FLIGHT TEST CENTER
AIR ARMAMENT CENTER
AIR WARFARE CENTER
ARNOLD ENGINEERING DEVELOPMENT CENTER
GOLDWATER RANGE
UTAH TEST AND TRAINING RANGE

20000329 056

DISTRIBUTION A: APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE January 2000	3. REPORT TYPE AND DATES (COVERED
4. TITLE AND SUBTITLE Telemetry Standards	•		5. FUNDING NUMBERS
6. AUTHOR(S)			
7. PERFORMING ORGANIZATION NAME(S) AN Telemetry Group Range Commanders Council White Sands Missile Range, N			8. PERFORMING ORGANIZATION REPORT NUMBER Document 106-00
9. SPONSORING / MONITORING AGENCY NAM CSTE-DTC-WS-RCC Range Commanders Council	ME(S) AND ADDRESS(ES)		10. SPONSORING / MONITORING AGENCY REPORT NUMBER
White Sands Missile Range, N	M 88002-5110		same as block 8
11. SUPPLEMENTARY NOTES			
Supersedes Document 106-99,	AD-A360563, which is obsolete	. Please remove 106-99	from distribution.
12a. DISTRIBUTION / AVAILABILITY STATEM	ENT		12b. DISTRIBUTION CODE
Distribution A: Approved for I	Public Release; Distribution is Un	nlimited.	
13. ABSTRACT (Maximum 200 words)			
processing equipment at the Ra	ange Commanders Council members	per ranges. These stand he orderly implementati	ry transmitting, receiving, and signal ards do not necessarily define the on and application of telemetry criteria on which to base equipment
14. SUBJECT TERMS	- Allerton		15. NUMBER OF PAGES 378
telemetry, telemetry standards			16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICATION	20. LIMITATION OF ABSTRACT
unclassified	unclassified	unclassified	none

IRIG STANDARD 106-00

TELEMETRY STANDARDS

JANUARY 2000

Prepared by

TELEMETRY GROUP RANGE COMMANDERS COUNCIL

Published by

Secretariat
Range Commanders Council
U.S. Army White Sands Missile Range,
New Mexico 88002-5110

THIS DOCUMENT IS AVAILABLE ON THE RANGE COMMANDERS COUNCIL WEBSITE AT http://tecnet0.jcte.jcs.mil

CHANGES TO THIS EDITION

There are three major changes to this edition of <u>Telemetry Standards</u>. Chapter 2 and Appendix A have been extensively revised, and Appendix E has been deleted. Several minor changes have been made to Chapter 9.

As in the 1999 edition, all changes are marked in the margins. Icons indicate where an action has taken place since the last revision.





If you have comments regarding this edition, please contact the Secretariat, Range Commanders Council, CSTE-DTC-WS-RCC, White Sands Missile Range, New Mexico 88002-5110. The RCC Secretariat e-mail address is RCC@wsmr.army.mil.

TABLE OF CONTENTS

,		<u>Page</u>
CHANGI	ES TO THIS EDITION	iii
ACRONY	YMS	xxv
СНАРТЕ	ER 1 - INTRODUCTION	1-1
1.1	General	1-1
1.2	Scope	1-1
1.3	Purpose	1-1
1.4	Reference Documents	1-1
1.5	Definitions	1-2
1.6	General Statements and Requirements	1-2
CHAPTI	ER 2 - TRANSMITTER AND RECEIVER SYSTEMS	2-1
2.1	Radio Frequency Standards for Telemetry	2-1
2.2	Definitions	2-1
2.3	UHF Bands	2-2
2.3.1	Allocation of the L Band (1435 to 1535 MHz)	2-2
2.3.1.1	1435 to 1525 MHz	2-2
2.3.1.2	1525 to 1530 MHz	2-2
2.3.1.3	1530 to 1535 MHz	2-3
2.3.2	Allocation of the S Band (2200 to 2300 MHz)	2-3
2.3.2.1	2200 to 2290 MHz	2-3
2.3.2.2	2290 to 2300 MHz	2-3
2.3.3	Allocation of the Upper S Band (2310 to 2390 MHz)	2-3
2.3.3.1	2310 to 2360 MHz	2-3
2.3.3.2	2360 to 2390 MHz	2-3
2.4	UHF Telemetry Transmitter Systems	2-4
2.4.1	Center Frequency Tolerance	2-4
2.4.2	Channel Bandwidth Definitions	2-4
2.4.2.1	Standard Bandwidth Signal	2-4
2.4.2.2	Wide Bandwidth Signal	2-4
2.4.3	Channelization	2-4
2.4.3.1	Standard Bandwidth Channels	2-4
2.4.3.2	Wide Bandwidth Channels	2-4
2.4.4	Output Power	2-5
2.4.5	Modulation	2-5
2.4.5	Characteristics of FOPSK-B	2-5

		<u>Page</u>
2.4.5.1.1	Differential Encoding	2-5
2.4.5.1.2	Data Randomization	2-6
2.4.5.1.3	Quadrature Modulator Phase Map	2-6
2.4.5.1.4	Bit Rate	2-6
2.4.5.1.5	Transmitter Phase Noise	2-7
2.4.5.1.6	Carrier Suppression	2-7
2.4.5.2	Modulation Polarity	2-7
2.4.6	Spurious Emission and Interference Limits	2-7
2.4.6.1	Transmitter-Antenna System Emissions	2-8
2.4.6.2	Conducted and Radiated Interference	2-8
2.4.7	Operational Flexibility	2-8
2.4.8	Modulated Transmitter Bandwidth	2-8
2.5	UHF Telemetry Receiver System	2-9
2.5.1	Spurious Emissions	2-9
2.5.2	Frequency Tolerance	2-9
2.5.3	Receiver Phase Noise	2-9
2.5.4	Spurious Responses	2-10
2.5.5	Operational Flexibility	2-10
2.5.6	Intermediate Frequency Bandwidths	2-10
	ER 3 - FREQUENCY DIVISION MULTIPLEXING TELEMETRY STANDARDS	3-1
3.1	General	3-1
3.2	FM Subcarrier Characteristics	3-1
3.3	FM Subcarrier Channel Characteristics	3-1
3.3.1	Proportional-Bandwidth FM Subcarrier Channel Characteristics	3-1
3.3.2	Constant-Bandwidth FM Subcarrier Channel Characteristics	3-5
3.4	Tape Speed Control and Flutter Compensation	3-5
СНАРТ	ER 4 - PULSE CODE MODULATION STANDARDS	4-1
4.1	General	4-1
4.2	Class Distinctions and Bit-Oriented Characteristics	4-1
4.2.1	Class I and Class II Distinctions	4-1
4.2.2	Bit-Oriented Definitions and Requirements	4-2
4.2.2.1	Binary Bit Representation	4-2
4.2.2.2	Serial Bit Stream Transitions	4-2
4.2.2.3	Bit Rate	4-2
4.2.2.4	Bit Rate Accuracy and Stability	4-2
4.2.2.5	Bit Jitter	4-2

		<u>Page</u>
4.3	Fixed Formats	4-2
4.3.1	Word-Oriented Definitions and Requirements	4-2
4.3.1.1	Word Length (Class I and II)	4-2
4.3.1.2	Fragmented Words (Class II)	4-4
4.3.1.3	Bit Numbering	4-4
4.3.1.4	Word Numbering	4-4
4.3.2	Frame Structure	4-4
4.3.2.1	Minor Frame	4-4
4.3.2.1.1	Minor Frame Length (Class I and II)	4-4
4.3.2.1.2	Minor Frame Composition	4-4
4.3.2.1.3	Minor Frame Synchronization	4-4
4.3.2.1.4	Transmitted Frame Counter	4-4
4.3.2.2	Major Frame	4-6
4.3.2.2.1	Major Frame Length	4-6
4.3.2.2.2	Minor Frame Numbering	4-6
4.3.2.3	Subcommutation	4-6
4.3.2.3.1	Subframe	4-6
4.3.2.3.2	Subframe Synchronization Method	4-6
4.3.2.4	Supercommutation	4-6
4.4	Format Change (Class II)	4-6
4.4.1	Frame Format Identification	4-7
4.4.2	Format Change Implementation Methods	4-7
4.4.2.1	Measurement List Change	4-7
4.4.2.2	Format Structure Change	4-7
4.5	Asynchronous Embedded Format (Class II)	4-7
4.6	Tagged Data Format (Class II)	4-7
4.6.1	Alternating Tag and Data	4-7
4.6.2	Bus Data Military Standard (MIL-STD-1553)	4-7
4.7	Time Words	4-8
4.8	Asychronous Data Merge	4-11
4.8.1	PCM Data Word Format	4-11
4.8.2	Insertion Process	4-11
4.8.2.1	Transmission Overhead	4-11
4.8.2.2	Parity Bit	4-11
4.8.2.3	Data Bits	4-11
4.8.2.4	Stale Data Bit	4-12
4.8.2.5	Overflow Bit	4-12
4.8.2.6	Insertion Rate	4-12
CHAPT	ER 5 - DIGITIZED AUDIO TELEMETRY STANDARD.	5-1
5.1	General	5-1

		Page
5.2	Definitions	5-1
5.2.1	Band-Limited Audio	5-1
5.2.2	Continuous Variable Slope Delta Modulation	5-1
5.3	Signal Source	5-1 5-1
5.4	Encoding/Decoding Technique	5-1
5.5	CVSD Encoder Output Bit Rate (CVSD Bit Rate)	5-1 5-2
5.6	CVSD Word Structure	5-2 5-2
5.7	CVSD Word Sample Rate	5-2 5-2
5.8	CVSD Bit Rate Determination	5-2 5-3
		J - 3
CHAPT	ER 6 - MAGNETIC TAPE RECORDER AND	
	REPRODUCER STANDARDS	6-1
6.1	Introduction	6-1
6.2	Definitions	6-1
6.2.1	5/6 Modulation Code	6-1
6.2.2	Basic Dimension	6-1
6.2.3	Bias Signal, High Frequency	6-1
6.2.4	Bi-Phase	6-2
6.2.5	Bit Error	6-2
6.2.6	Bit Error Rate	6-2
6.2.7	Bit Packing Density, Linear	6-2
6.2.8	Bit Slip	6-2
6.2.9	Code Frame	6-2
6.2.10	Code Word Digital Sum (CWDS)	6-2
6.2.11	Crossplay	6-2
6.2.12	Crosstalk	6-2
6.2.13	Data Azimuth (Dynamic)	6-2
6.2.14	Data Scatter	6-2
6.2.15	Data Spacing	6-2
6.2.16	Digital Sum Variation (DSV)	6-2
6.2.17	Direct Recording (ac Bias Recording)	6-3
6.2.18	Double-Density Recording	6-3
6.2.19	Dropout	6-3
6.2.20	ECC Code Word	6-3
6.2.21	Edge Margin	6-3
6.2.22	Edge Margin Minimum	6-3
6.2.23	Error Correcting Code	6-3
6.2.24	FM Recording	6-3
6.2.25	Flux Transition	6-3
6.2.26	Flux Transition Density	6-3
6.2.27	Flutter	6-3
6.2.28	Gap Azimuth	6.3

		<u>Page</u>
6.2.29	Gap Length (Physical)	6-4
6.2.30	Gap Scatter (Record Head)	6-4
6.2.31	Gap Scatter (Reproduce Head)	6-4
6.2.32	Guard Band	6-4
6.2.33	Head (Record or Reproduce)	6-4
6.2.34	Head Designation	6-4
6.2.35	Heads, In-Line	6-4
6.2.36	Head Reference Plane	6-4
6.2.37	Head Segment, Record or Reproduce	6-4
6.2.38	Head Segment Gap Azimuth (Record or Reproduce Heads)	6-4
6.2.39	Head Segment Gap Azimuth Scatter	6-5
6.2.40	Head Segment Numbering	6-5
6.2.41	Head Spacing	6-5
6.2.42	Head Tilt	6-5
6.2.43	Heads, Interlaced	6-5
6.2.44	Helical Track	6-5
6.2.45	High-Density Digital Recording	6-5
6.2.46	Individual Track Data Azimuth Difference	6-5
6.2.47	Interleaving	6-5
6.2.48	Non-Return-To-Zero Level	6-5
6.2.49	Physical Recording Density	6-5
6.2.50	Principal Block	6-5
6.2.51	Principal Block Number (PBN)	6-6
6.2.52	Record Level Set Frequency	6-6
6.2.53	Reference Tape Edge	6-6
6.2.54	Reference Track Location	6-6
6.2.55	Scanner	6-6
6.2.56	Standard Record Level	6-6
6.2.57	Tape Skew	6-6
6.2.58	Tape Speed, Absolute	6-6
6.2.59	Tape Speed, Effective	6-6
6.2.60	Tape Speed Errors	6-6
6.2.61	Track Angle	6-6
6.2.62	Track Location	6-6
6.2.63	Track Numbering	67
6.2.64	Track Spacing	6-7
6.2.65	Track Width	6-7
6.2.66	Volume Label	6-7
6.3	General Consideration for Longitudinal Recording	6-7
6.3.1	Tape Speeds	6-7
6.3.2	Tape Width	6-7
6.3.3	Record and Reproduce Bandwidths	6-7
6.4	Recorded Tape Format	6-7

		Page
6.4.1	Track Width and Spacing	6-7
6.4.2	Track Numbering	6-16
6.4.3	Data Spacing	6-16
6.4.4	Head Placement	6-16
6.4.4.1	Head Placement, Interlaced	6-16
6.4.4.2	Head Identification and Location	6-16
6.4.4.3	In-Line Head Placement	6-16
6.4.4.4	Head Segment Location	6-16
6.5	Head and Head Segment Mechanical Parameters	6-16
6.5.1	Gap Scatter	6-16
6.5.2	Head Segment Gap Azimuth Alignment	6-17
6.5.3	Head Tilt	6-17
6.5.4	Record-Head Segment Gap Parameters	6-17
6.5.4.1	Record-Head Segment Gap Length	6-17
6.5.4.2	Record-Head Stack Gap Azimuth Alignment	6-17
6.5.4.3	Reproduce-Head Segment Gap Azimuth Alignment	6-17
6.6	Head Polarity	6-17
6.6.1	Record-Head Segment	6-17
6.6.2	Reproduce-Head Segment	6-17
6.7	Magnetic Tape and Reel Characteristics	6-18
6.7.1	Tape Width	6-18
6.7.2	Tape Guiding	6-18
6.8	Direct Record and Reproduce Systems	6-18
6.8.1	Direct Record Parameters	6-18
6.8.2	Standard Record Level	6-19
6.8.3	Reproduce Parameters	6-19
6.8.4	Tape Speed and Flutter Compensation	6-19
6.9	Timing, Predetection, and Tape Signature Recording	6-20
6.9.1	Timing Signal Recording	6-20
6.9.2	Predetection Recording	6-20
6.9.3	Tape Signature Recording	6-20
6.10	FM Record Systems	6-22
6.10.1	Tape and Reel Characteristics	6-22
6.10.2	Tape Speeds and Corresponding FM Carrier Frequencies	6-22
6.10.3	FM Record/Reproduce Parameters	6-22
6.10.4	Speed Control and Compensation	6-24
6.10.5	FM Record Parameters	6-24
6.10.5.1	Deviation Direction	6-24
6.10.6	FM Reproduce Systems	6-24
6.11	PCM Recording	6-24
6.11.1	Predetection PCM Recording	6-24
6.11.2	Post-Detection PCM Recording	6-24
6.11.3	Serial High Density Digital Recording	6-25

		Page
6.11.4.1	PCM Codes	6-25
6.11.4.2	Biφ-L Code	6-26
6.11.4.3	RNRZ-L Code	6-26
6.11.4.4	Record Parameters	6-28
6.11.4.5	Reproduce Parameters	6-28
6.11.4.5.1	PCM Signature	6-28
6.11.4.5.2	Phase Equalizer	6-28
6.11.4.6	Magnetic Tape	6-28
6.11.4.7	Tape Copying	6-28
6.11.4.8	PCM Bit Synchronizer	6-29
6.12	Preamble Recording for Automatic or Manual Recorder Alignment	6-29
6.12.1	Alignment, Direct Electronics	6-29
6.12.2	Alignment, FM Electronics	6-29
6.13	19-mm Digital Cassette Helical Scan Recording Standards	6-29
6.13.1	Track Format	6-29
6.13.2	Tape and Cassettes	6-30
6.13.3	Recorder/Reproducer Input and Output	6-30
6.14	Multiplex/Demultiplex (MUX/DEMUX) Standard for	0-30
	Multiple Data Channel Recording on 19-MM Digital	
	Cassette Helical Scan Recorder/Reproducer Systems	6-32
6.15	Submultiplex/Demultiplex Standards for Multiple Data	0-32
	Channels on a Primary Digital Multiplex/Demultiplex	
	Channel	6-34
6.15.1	Format Structure	6-35
6.15.2	Implied Parameters and Limits	6-35
6.15.3	Defined Parameters	6-36
5.15.4	Aggregate Format on the Primary Data Channel	6-37
6.15.5	Submux/Demux FILL Requirements	6-37
6.16	1/2 Inch Digital Cassette (S-VHS) Helical Scan Recording	0-37
	Standards	6-40
6.16.1	Tape and Tape Cartridge	6-40
6.16.2	Format Types	6-40
6.16.2.1	B Format	6-40
6.16.2.2	E Format	6-40
6.16.3	Data Storage	6-42
6.16.4	Physical Relationships	6-42
6.16.5	Helical Track Organization	6-42
6.16.6	Recorded Information	6-42
6.16.7	Recording Geometry and Physical Dimensions	6-43
6.16.7.1	Tape Reference Edge	6-43
6.16.7.2	Helical Tracks	6-43
6.16.7.2.1	Track Widths	6-43

		<u>Page</u>
6.16.7.2.2	Track Pitch	6-43
6.16.7.2.3	Track Straightness	6-43
6.16.7.2.4	Gap Azimuths	6-43
6.16.7.2.5	Track Guard Bands	6-44
6.16.7.2.6	Track Angle	6-44
6.16.7.2.7	Track Length	6-44
6.16.7.2.8	Physical Recording Density	6-44
6.16.7.3	Longitudinal Tracks	6-44
6.16.7.3.1	Servo Track	6-44
6.16.7.3.2	Filemark Track	6-44
6.16.8	Tape Cartridge Format	6-46
6.16.8.1	Load Point	6-46
6.16.8.2	Format Zone	6-46
6.16.8.3	Logical Beginning of Tape	6-46
6.16.8.4	Data Zone	6-46
6.16.8.5	Logical End of Tape	6-46
6.16.9	Helical Track Format	6-47
6.16.9.1	Sync Patterns	6-48
6.16.9.2	Data Blocks	6-48
6.16.9.2.1	Error Correction Encoding	6-48
6.16.9.2.2	Interleave Buffer	6-50
6.16.9.2.2.1	Exchange of Data with ECC	6-50
6.16.9.2.2.2	Exchange of Data To and From Tape	6-52
6.16.9.2.3	8 to 5 Conversion	6-54
6.16.9.2.4	Miscellaneous Information Inclusion	6-54
6.16.9.2.5	Modulation Code	6-56
6.17	Multiplex/Demultiplex (MUX/DEMUX) Standards for	
	Multiple Data Channel Recording on ½ Inch Digital	
	Cassette (S-VHS) Helical Scan Recorder/Reproducer	
6 17 1	System	6-56
6.17.1	General	6-56
6.17.2	Setup Block Format	6-56
6.17.3 6.17.3.1	Multiplexer Format	6-57
6.17.3.1	Frame Structure	6-57
· · · ·	Pacer Divisor Calculation	6-58
6.17.3.3	ARMOR Channel Coding	6-59
6.17.3.4	Sync Pattern	6-59
6.17.3.5	Time Code Channels	6-59
6.17.3.6	PCM Channels	6-60
6.17.3.7	Analog Channels	6-61
6.17.3.8	Parallel Channels	6-61
6.17.4	ARMOR Format Compatibility	6-61
6.17.5	ARMOR Format Validation	6-62

		<u>Page</u>
СНАРТІ	ER 7 - MAGNETIC TAPE STANDARDS	7-1
7.1	General	7-1
7.2	Definitions	7-1
7.2.1	Back Coating	7-1
7.2.2	Base	7-1
7.2.3	Bias Level	7-2
7.2.4	Bi-Directional	7-2
7.2.5	Binder	7-2
7.2.6	Blocking	7-2
7.2.7	Center Tracks	7-2
7.2.8	Dropout	7-2
7.2.9	Edge Tracks	7-2
7.2.10	Erasure	7-2
7.2.11	E-Value	7-2
7.2.12	High-Density Digital Magnetic Tape	7-2
7.2.13	High-Energy Magnetic Tape	7-2
7.2.14	High-Resolution Magnetic Tape	7-3
7.2.15	Layer-to-Layer Signal Transfer (Print Through)	7-3
7.2.16	Magnetic Oxide Coating	7-3
7.2.17	Manufacturer's Centerline Tape	7-3
7.2.18	Manufacturer's Secondary Centerline Tape	7-3
7.2.19	Modulation Noise	7-3
7.2.20	Record Level	7-3
7.2.21	Scatterwind	7-3
7.2.22	Shedding	7-3
7.2.23	Short Wavelength Output Uniformity	7-4
7.2.24	Upper Band Edge	7-4
7.2.25	Wavelength Response	7-4
7.2.26	Working Length	7-4
7.2.27	Working Reference Tape	7-4
7.3	General Requirements for Standard Tapes and Reels	7-4
7.3.1	Reference Tape System	7-4
7.3.1.1	Manufacturer's Centerline Tape	7-4
7.3.1.2	Manufacturer's Secondary Centerline Tape	7-4
7.3.1.3	Working Reference Tape	7-5
7.3.1.4	Test Recorder and Reproducer	7-5
7.3.1.5	MCT/MSCT/WRT Use	7-5
7.3.2	Marking and Identifying	7-5
7.3.3	Packaging	7-5
721	Winding	7_5

		<u>Page</u>
7.3.5	Reels and Hubs	7-5
7.3.6	Radial Clearance (E-Value)	7-5
7.3.7	Flammable Materials	7-5
7.3.8	Toxic Compounds	7-5
7.4	General Characteristics of Tapes and Reels	7-6
7.4.1	Dimensional Specifications	7-6
7.4.2	Environmental Conditions	7-7
7.4.2.1	Tape Storing Conditions	7-7
7.4.2.2	Operating Environment	7-7
7.4.2.3	Non-operating Environment	7-7
7.4.3	Other Characteristics	7-8
7.5	Physical Characteristics of Instrumentation Tapes and Reels	7-8
7.6	Instrumentation Tape Magnetic and Electrical Characteristics	7-8
7.6.1	Bias Level	7-8
7.6.2	Record Level	7-8
7.6.3	Wavelength Response	7-8
7.6.4	Output at 0.1 UBE Wavelength	7-9
7.6.5	Short Wavelength Output Uniformity	7-9
7.6.6	Dropouts	7-9
7.6.7	Durability	7-10
7.6.8	Modulation Noise	7-11
7.6.9	Layer-to-Layer Signal Transfer	7-11
7.6.10	Erasure Ease	7-14
7.6.11	Suggested Tape Requirement Limits	7-14
7.7	General Requirements for 19-mm Digital Cassette	
	Helical Scan Recording Tape and Cassettes	7-14
7.7.1	Magnetic Tape	7-14
7.7.2	19-mm Cassettes	7-14
7.8	General Requirements for 1/2-Inch Digital Cassette	
	Helical Scan Recording Tape and Cassettes	7-14
7.8.1	Magnetic Tape	7-14
7.8.2	1/2-Inch Cassettes	7-14
CHAPI	TER 8 - MIL-STD-1553 ACQUISITION FORMATTING	
	STANDARD	8-1
8.1	General	8-1
8.2	Definitions	8-1
8.2.1	Bus Monitor	8-1
8.2.2	Data Bus	8-1
8.2.3	Dual Redundant Data Bus	8-1
8.2.4	Bus Loading	8-1

		<u>Page</u>
8.2.5	Maximum Burst Length	8-1
8.2.6	Bus Error	8-1
8.3	Source Signal	8-2
8.4	Word Structure	8-2
8.5	Time Words	8-5
8.6	Composite Output	8-5
8.7	Single Bus Track Spread Recording Format	8-6
CHAPTI	ER 9 - TELEMETRY ATTRIBUTES TRANSFER	
	STANDARD	9-1
9.1	General	9-1
9.2	Scope	9-1
9.3	Purpose	9-1
9.4	Media and Data Structure	9-2
9.4.1	Physical Format	9-2
9.4.2	Logical Format	9-2
9.4.2	Telemetry Attributes	9-3
9.5.1	Contents	9-4
9.5.1.1	Organization	9-4
9.5.1.1	Group Relationships	9-5
9.5.2	General Information (G)	9-7
9.5.3	Transmission Attributes (T)	9-10
9.5.4	Tape Source Attributes (R)	9-15
9.5.5	Multiplex/Modulation Attributes (M)	9-20
9.5.6	Digital Data Attributes	9-25
9.5.6.1	PCM Format Attributes (P)	9-25
9.5.6.2	PCM Measurement Description (D)	9-39
9.5.6.3	1553 Bus Data Attributes (B)	9-50
9.5.7	PAM Attributes (A)	9-57
9.5.8		9-60
9.5.9	Data Conversion Attributes (C)	9-71
APPEN	DIX A - FREQUENCY CONSIDERATIONS FOR	
	TELEMETRY	A-1
1.0	Purpose	A-2
2.0	Scope	A-2
2.1	Definitions	A-2
2.2	Other Notations	A-3
3.0	Authorization to Use a Telemetry System	A-3
3.1	RF Spectrum Support Certification	A-3
211	Frequency Allocation	A-4

		Page
3.1.1.1	Telemetry Bands	A-4
3.1.1.2	VHF Telemetry	A-4
3.1.2	Technical Standards	A-4
3.2	Frequency Authorization	A-4
4.0	Frequency Usage Guidance	A-5
4.1	Frequency Assignments	A-5
4.2	Geographical Separation	A-5
4.3	Simultaneous Operation	A-6
4.4	Multicarrier Operation	A-6
4.5	Transmitter Antenna System Emission Testing	A-6
5.0	Bandwidth	A-6
5.1	Concept	A-7
5.1.1	Authorized Bandwidth	A-7 A-7
5.1.2	Occupied Bandwidth	A-7 A-7
5.1.3	Necessary Bandwidth	
5.1.4	Received (or Receiver) Bandwidth	A-7 A-8
5.1.4	Bandwidth Estimation and Measurement	A-8 A-8
5.2.1	99-Percent Power Bandwidth	A-8 A-8
5.2.2	-25 dBm Bandwidth	A-8 A-10
5.2.3	Other Bandwidth Measurement Methods	A-10 A-10
5.2.3.1	Below Unmodulated Carrier	A-10 A-10
5.2.3.2	Below Peak	A-10 A-11
5.2.3.3	Carson's Rule	A-11 A-12
5.2.4	Spectral Equations	A-12 A-12
5.2.5	Receiver Bandwidth	A-12 A-14
5.2.6	Receiver Noise Bandwidth	A-14 A-14
5.3	Phase-Modulated Systems	A-14 A-14
5.4	Symmetry	A-14 A-15
5.5	FM Transmitters (ac coupled)	A-15 A-15
6.0	Spectral Occupancy Limits	A-15 A-15
6.1	Spectral Mask	A-15 A-15
6.2	Spectral Mask Examples	A-13 A-17
7.0	FQPSK-B Characteristics	A-17 A-18
	·	A-10
APPENI	DIX B - USE CRITERIA FOR FREQUENCY DIVISION MULTIPLEXING	B-1
	MICHAEL MARKET CO.	D-1
1.0	General	B-2
2.0	FM Subcarrier Performance	B-2
3.0	FM Subcarrier Performance Tradeoffs	B-3
4.0	FM System Component Considerations	B-4
5.0	Range Capability for FM Subcarrier Systems	B-5

		<u>Page</u>
5.1	Receivers and Tape Recorders	B-5
5.2	Discriminator Channel Selection Filters	B-5
APPEND	OIX C - PCM STANDARDS	C-1
1.0	Bit Rate Versus Receiver Intermediate-Frequency Bandwidth	C-2
2.0	Recommended PCM Synchronization Patterns	C-3
3.0	Spectral and BEP Comparisons for NRZ and Bio	C-3
4.0	PCM Frame Structure Examples	C-6
APPEND	DIX D - MAGNETIC TAPE RECORDER AND REPRODUC	ER
	INFORMATION AND USE CRITERIA	D-1
1.0	Other Instrumentation Magnetic Tape Recorder	
	Standards	D-2
2.0	Double-Density Longitudinal Recording	D-3
2.2.1	Other Track Configurations	D-3
2.2.2	High-Density PCM Recording	D-3
3.0	Serial HDDR	D-9
3.9	Randomizer for RNRZ-L	D-11
4.0	Head Parameters	D-17
4.1	Gap Scatter	D-17
4.2	Head Polarity	D-17
5.0	Record Level	D-17
6.0	Tape Crossplay Considerations	D-18
7.0	Standard Tape Signature Procedures	D-18
7.1	PCM Signature Recording Procedures	D-18
7.2	PCM Signature Playback Procedure	D-20
7.3	Swept Frequency Signature Recording Procedure	D-20
7.4	Swept Frequency Signature Playback Procedure	D-21
8.0	Equipment Required for Swept-Frequency Procedures	D-21
9.0	Fixed-Frequency Plus White Noise Procedure	D-22
10.0	Signature Playback and Analysis	D-23
11.0	Recording and Playback Alignment Procedures	D-23
11.1	Recording of Preamble for Direct Electronics Alignment	D-23
11.2	Playback of Preamble for Direct Electronics Alignment	D-24
11.3	Recording of Preamble for FM Electronics Alignment	D-25
11.4	Playback of Preamble for FM Electronics Alignment	D-25
APPEN	DIX E – AVAILABLE TRANSDUCER DOCUMENTATION Intentionally Deleted	N E-1

		Page
APPENI	DIX F - CONTINUOUSLY VARIABLE SLOPE DELTA	
	MODULATION	F-1
1.0	General	F-2
2.0	General Descriptions	F-2
2.1	Delta Modulation	F-2
2.2	CVSD Converter	F-2
3.0	Detailed Descriptions	F-4
3.1	Input Band Pass Filter	F-4
3.2	Comparator	F-4
3.3	3-Bit Shift Register	F-4
3.4	Overload Algorithm	F-4
3.5	Syllabic Filter	F-5
3.6	Pulse Amplitude Modulator (PAM)	F-5
3.7	Reconstruction Integrator	F-5
3.8	Output Low-Pass Filter	F-5
3.9	Typical CVSD Decoder Output Envelope	
	Characteristics	F-5
4.0	Reference Level	F-6
5.0	CVSD Characteristics	F-6
5.1	Input and Output Impedances	F-6
5.2	Data Signaling Rates	F-6
5.3	Input and Output Filters	F-6
5.4	Overload Algorithm	F-7
5.5	Compression Ratio	F-7
5.6	Syllabic Filter	F-7
5.7	Reconstruction Integrator Time Constant	F-7
5.8	Analog-to-Digital Conversion	F-7
5.9	Digital-to-Analog Conversion	F-7
5.9.1	Relation of Output to Input	F-7
5.9.2	Conversion Speed	F-7
5.10	CVSD Converter Performance	F-7
5.10.1	Companding Speed	F-8
5.10.2	Insertion Loss	F-8
5.10.3	Insertion Loss Versus Frequency Characteristics	F-8
5.10.4	Variation of Gain With Input Level	F-10
5.10.5	Idle Channel Noise	F-10
5.10.6	Variation of Quantizing Noise With Input Level	F-10
5 10 7	Variation of Quantizing Noise With Frequency	E 10

		<u>Page</u>
APPENI	DIX G - ADARIO DATA BLOCK FIELD DEFINITIONS	G-1
	ADARIO Data Format Field Definitions Summary	G-6
APPENI	DIX H - APPLICATION OF THE TELEMETRY ATTRIBU	TFS
AIIEM	TRANSFER STANDARD	H-1
APPENI	DIX I - TELEMETRY ATTRIBUTES TRANSFER STANDA	\RD
	COVER SHEET	I-1
APPENI	DIX J - TELEMETRY ATTRIBUTES TRANSFER STANDA FORMAT EXAMPLE	ARD J-1
APPENI	DIX K - PULSE AMPLITUDE MODULATION	
	STANDARDS	K-1
1.0	General	K-2
2.0	Frame and Pulse Structure	K-2
2.1.1	Commutation Pattern	K-2
2.1.2	In-Flight Calibration	K-2
2.1.3	Frame Synchronization Interval	K-2
2.1.3.1	Fifty Percent Duty Cycle (RZ-PAM)	K-2
2.1.3.2	One Hundred Percent Duty Cycle (NRZ-PAM)	K-4
2.1.4	Maximum Pulse Rate	K-4
2.1.4.1	PAM/FM/FM	K-4
2.1.4.2	PAM/FM	K-4
2.2	Frame and Pulse Rate	K-4
2.2.1	Long Term Accuracy and Stability	K-4
2.2.2	Short Term Stability	K-4
2.3	Multiple and Submultiple Sampling Rates	K-4
2.3.1	Submultiple Frame Synchronization	K-4
2.3.1.1	Fifty Percent Duty Cycle (RZ)	K-5
2.3.1.2	One Hundred Percent Duty Cycle (NRZ)	K-5
2.3.2	Maximum Submultiple Frame Length	K-5
2.4	Frequency Modulation	. K-5
2.5	Premodulation Filtering	K-5
APPEN	DIX L – ARMOR	L-1
1.0	General	L-2
1 1	Setup on Tane	1 2

		<u>1 age</u>
2.0	Setup Organization	L-3
2.1	Header Section	L-3
2.2	Channel Section	L-5
2.3	Trailer Section	L-15
2.4	Saved Scan-list Structure	L-16
2.5	Creating a Setup Block	L-16
2.5.1	Header Section	L-17
2.5.2	Channel Section	L-17
2.5.2.1	PCM Input Channels	L-17
2.5.2.2	Analog Input Channels	L-17
2.5.2.3	Parallel Input Channels	L-18
2.5.2.4	Time Code Input Channels	L-18
2.5.2.5	Voice Input Channels	L-18
2.5.3	Trailer Section	L-18
2.5.4	ARMOR Compiler Program	L-18
	1	L-10
	LIST OF FIGURES	
Figure No.		Page
2-1	Continuous single sideband phase noise power spectral density	2-7
4-1	PCM code definitions	4-3
4-2	PCM frame structure	4-5
4-3	16 bit standardized time word format	4-9
4-4	Time word insertion into 12 bit PCM word size	4-10
4-5	Asynchronous word structure	4-12
4-6	Overhead truth table	4-12
5-1	Insertion of CVSD encoded audio into a PCM stream	5-2
6-1	Recorded tape format	6-12
6-2	Record and reproduce head and head segment	0 12
	identification and location (N-track	
	interlaced system)	6-13
6-3	Head and head segment mechanical parameters	6-14
6-4	PCM record and reproduce configuration	6-15
6-5	Serial high density digital record and reproduce	6-27
6-6	Location and dimensions of recorded tracks	6-30
6-7	ADARIO block format	6-33
6-8	ADARIO data format	6-34
6-9a	Submux data format	6-38
6-9b	Submux data format	6-39
6-10	Helical track dimensions, B format	6-41
6-11	Helical track dimensions. F format	6 41

Figure No.		<u>Page</u>
6-12	Recorded tracks on tape, B format	6-45
6-13	Tape cartridge layout	6-46
6-14	Helical track format	6-47
6-15	Typical VLDS data path electronics block diagram	6-49
6-16	Interleave buffer architectures	6-51
6-17	The steps of the build process	6-57
8-1	System block diagram	8-2
8-2	Word construction	8-4
8-3	Composite frame structure	8-7
8-4	Multiple tape track spread format (4-track spread example)	8-8
9-1	Group relationships	9-6
9-2	General Information Group (G)	9-7
9-3	Transmission Attributes Group (T)	9-11
9-4	Tape Source Attributes Group (R)	9-16
9-5	Multiplex/Modulation Attributes Group (M)	9-21
9-6	PCM Format Attributes Group (P)	9-26
9-7	PCM Measurement Description Group (D)	9-40
9-8	1553 Bus Data Attributes Group (B)	9-51
9-9	PAM Attributes Group (A)	9-57
9-10	Data Conversion Attributes Group (C)	9-61
A-1	800-kb/s and 5-Mb/s RNRZ PCM/FM signals	A-5
A-2	RNRZ PCM/FM signal	A-10
A-3	Spectrum analyzer calibration of 0-dBc level	A-11
A-4	Biφ PCM/PM signal	A-11
A-5	FM/FM signal and Carson's Rule	A-12
A-6	Typical receiver IF filter response (-3 dB bandwidth = 1 MHz)	A-14
A-7	Filtered 1-Mb/s RNRZ PCM/FM signal and spectral mask	A-17
A-8	Unfiltered 1-Mb/s RNRZ PCM/FM signal and spectral mask	. A-17
A-9	Typical 1-Mb/s FQPSK-B signal and spectral mask	A-17
A-10	OQPSK modulator	A-18
A-11	I & Q constellation	A-18
A-12	FQPSK-B wavelets	A-19
A-13	FQPSK-B I & Q eye diagrams (at input to IQ modulator)	A-19
A-14	FQPSK-B vector diagram	A-19
A-15	FQPSK-B spectrum with random input data	A-20
A-16	FQPSK-B spectrum with all 1's input and large modulator errors	A-20
A-17	FQPSK-B BEP vs E _b /N ₀	A-21
C-1	BEP versus IF SNR in bandwidth = bit rate for NRZ-L PCM/FM	C-2
C-2	Spectral densities of random NR 7 and Bid codes	C 6

Figure No.	•	<u>Page</u>
C-3	Theoretical bit error probability performance for various	
	baseband PCM signaling techniques (perfect bit	
	synchronization assumed)	C-7
C-4	Major frame length = minor frame maximum length	C-8
C-5	Major frame length = minor frame maximum length multiplied by Z	C-9
C-6	Major frame length = minor frame maximum length	
D-1	Record and reproduce head and head segment	C-10
D 0	identification and location (7-track interlaced system)	D-4
D-2	Randomizer block diagram	D-12
D-3	Randomized NRZ-L decoder block diagram	D-13
D-4	Random PCM power spectra	D-15
D-5	Sample eye patterns at output of recorder/reproducer	D-16
D-6	Tape crossplay	D-19
D-7	Square wave responses	D-25
F-1a	Typical CVSD encoder	F-3
F-1b	Typical CVSD decoder	F-3
F-2	Typical envelope characteristics of the decoder output signal for CVSD	F-6
F-3	Interface diagram for CVSD converter	F-8
F-4a	Insertion loss versus frequency for CVSD (16 kbps)	F-9
F-4b	Insertion loss versus frequency for CVSD (32 kbps)	F-10
F-5a	Variation of gain with input level for CVSD (16 kbps)	F-11
F-5b	Variation of gain with input level for CVSD (32 kbps)	F-11
F-6a	Signal to quantizing noise ratio versus input level	
F-6b	for CVSD (16 kbps)	F-12
	for CVSD (32 kbps)	F-12
F-7a	orginal to quantizing noise ratio versus frequency	T 10
F-7b	for CVSD (16 kbps)	F-13
r-/U	Signal to quantizing noise ratio versus frequency for CVSD (16 kbps)	F-13
G-1	ADARIO data format	G-3
G-2	ADARIO data blocks	G-4
G-3	ADARIO timing	G-5
G-4a	Submux data format	G-20
G-4b	Submux data format	G-21
G-5	Submux aggregate format	G-22
H-1	Typical elements of the telemetry attributes transfer process	
T_1	Group linkages	H-3

J-3	PCM format for PCM1	J-7
J-4	PCM format for async	J-8
K-1	50-percent duty cycle PAM with amplitude	
	synchronization	K-3
K-2	100-percent duty cycle PAM with amplitude	
	synchronization	K-3
	LIST OF TABLES	
Table No.		Page
Table No.		<u>x uge</u>
2-1	FQPSK-B Phase Map	2-6
2-2	Standard Receiver IF Bandwidths	2-10
3-1	Proportional-Bandwidth FM Subcarrier Channels	3-2
3-2	Constant-Bandwidth FM Subcarrier Channels	3-6
3-3	Reference Signal Usage	3-7
6-1	Record and Reproduce Parameters	6-8
6-2	Dimensions - Recorded Tape Format, 14 Tracks	0 0
0-2	Interlaced on 25.4 mm (1 in.) Wide Tape	6-9
6-3	Dimensions - Recorded Tape Format, 14 Tracks	
0-5	In-Line on 25.4 mm (1 in.) Wide Tape	6-10
6-4	Dimensions - Recorded Tape Format, 28 Tracks	0.10
0 4	Interlaced on 25.4 mm (1 in.) Wide Tape	6-11
6-5	Constant-Amplitude Speed-Control Signals	6-21
6-6	Predetection Carrier Parameters	6-22
6-7	Wide-Band and Double-Density FM Record Parameters	6-23
6-8	Maximum Recommended Bit Rates, Post-Detection	
0 0	Recording	6-25
6-9	Maximum Recommended Bit Rates	6-26
6-10	Record Location and Dimensions	6-31
6-11	Tape Length and Nominal Play Record/Reproduce	
0 11	Time at 240 Megabits/Second User Data Rate	6-31
6-12	Scanlist build steps	6-58
6-13	Sample armor frame	6-59
6-14	Time code word format	6-60
7-1	Tape Dimensions	7-6
7-1 7-2	Measurement Wavelengths	7-9
7-2 7-3	Durability Signal Losses	7-11
7-4 ·	Suggested Tape Requirement Limits	7-12
7-4A	Suggested Wavelength Response Requirements	7-13
9-1	General Information Group (G)	9-8
, <u>, , , , , , , , , , , , , , , , , , </u>	xxiii	, (
	1747111	

PCM format for PCM w/async

J-2

J-6

<u>Table No</u> .		Page
9-2	Transmission Attributes Group (T)	9-12
9-3	Tape Source Attributes Group (R)	9-17
9-4	Multiplex/Modulation Group (M)	9-22
9-5	PCM Format Attributes Group (P)	9-28
9-6	PCM Measurement Description Group (D)	9-42
9-7	1553 Bus Data Attributes Group (B)	9-52
9-8	PAM Attributes Group (A)	9-58
9-9	Data Conversion Attributes Group (C)	9-63
A-1	99% Power Bandwidths for Various Digital Modulation Methods	
C-1		A-9
C-1	Optimum Frame Synchronization Patterns for PCM	~ ~
D 1	Telemetry	C-5
D-1	Dimensions - Recorded Tape Format, 7-Tracks	
D 0	Interlaced on 12.7-mm (1/2 in.) Wide Tape	D-5
D-2	Dimensions - Recorded Tape Format, 14-Tracks	
D 2	Interlaced on 12.7-mm (1/2 in.) Wide Tape	D-6
D-3	Dimensions - Recorded Tape Format, 42-Tracks	
T 1	Interlaced on 25.4-mm (1 in.) Wide Tape	D-7
F-1	Decoder Reference Digital Patterns for CVSD	F-8
F-2	Insertion Loss Limits for CVSD	F-9
F-3	Idle Channel Noise Limits for CVSD	F-12
L-1	ARMOR Setup Preamble	L-2
L-2	Setup Organization	L-3
L-3	Header Section Format	L-4
L-4	Channel Entry Lengths	L-5
L-5	PCM Input Channels	L-6
L-6	Analog Input and Output Channels	L-7
L-7	Analog Input and Output Channels	L-8
L-8	Parallel Input Channels	L-9
L-9	Parallel Output Channels	L-10
L-10	Time Code Input Channels	L-11
L-11	Time Code Output Channels	L-12
L-12	Voice Input Channel	L-13
L-13	Voice Output Channels	L-14
L-14	Bit Sync Input Channels	L-15
L-15	Trailer Section Format	L-16

INDEX

ADARIO Analog/Digital/Adaptable/Recorder Input/Output

AFC automatic frequency control

AFTRCC Aerospace and Flight Test Radio Coordinating Council

AGC automatic gain control
ALC automatic level control
AM amplitude modulation
APC automatic phase control

ARMOR Asynchronous Real-time Multiplexer and Output Reconstructor

AWGN additive white Gaussian noise

BCD binary coded decimal BEP bit error probability

BER bit error rate
BiØ-L bi-phase level
BM block marker

BMD block marker division

pbs bits per second
BRC block rate clock
BW bandwidth

CHP channel parameter

CPFSK continuous phase frequency shift keying

CR carriage return
CSR clock slip rate

CVSD continuous variable slope delta

CW continuous wave CWDS code word digital sum

dBm decibels referenced to 1 milliwatt

DOD Department of Defense

DSB double sideband
DSV digital sum variation

ECC error correction coding ENR excess noise ratio

EOF end of file

EIRP effective isotropic radiated power

FCC Federal Communications Commission

FDM frequency division multiplex

FET field effect transistor

FFI frame format identification FM frequency modulation

FMG Frequency Management Group

FQPSK Feher's-patented quadrature phase shift keying

GF Galois field
G/T gain/temperature

HDD high density digital

HDDR high density digital recording

HE high energy HR high resolution

IF intermediate frequency
IM intermediate frequency

IM intermodulation

IMD intermodulation distortion

IP intercept point ips inches per second

IRAC Interdepartmental Radio Advisory Committee

IRIG Interrange Instrumentation Group
ITDE interchannel time displacement error
ITU International Telecommunications Union

kHz kilohertz ks kiloseconds

LBOT logical beginning of tape

LEOT logical end of tape

LF line feed
LIFO last in first out
LO local oscillator
log logarithm

LSB least significant bit

Mbps megabits per second

MC master clock

MCEB Military Communications-Electronics Board

MCS master clock source

MCT manufacturer's centerline tape

MGC manual gain control

MHz megahertz

MIL STD military standard MSB most significant bit

MSCT manufacturer's secondary centerline tape

MSK minimum shift keying

N newton

NNT notch noise test
NPR noise power ratio
NPRF noise power ratio floor

NRZ non-return-to-zero

NRZ-L non-return-to-zero-level

NTIA National Telecommunications and Information Administration

OQPSK offset quadrature phase shift keying

PBOT physical beginning of tape

PEOT physical end of tape

p-p peak-to-peak

PAM pulse-amplitude modulation

PB principal block

PCM pulse-code modulation

PLL phase-lock loop
PM phase modulation
PRN pseudo random noise
PSD power spectral density
PSK phase shift keying
PW partial word

PWS partial word status

QPSK quadrature phase shift keying

R bit rate

RCC Range Commanders Council

RF radio frequency RH relative humidity rms root mean square

RNRZ randomized non-return-to-zero RNRZ-L randomized non-return-to-zero-level

RS Reed-Solomon

SNR signal-to-noise ratio

SSB single sideband SST session start time ST subterminal

STA subterminal address SWR standing wave ratio

TBE time base error
TC tachometer constant

TD time delay

TMATS Telemetry Attributes Transfer Standard

TTL transistor-transistor logic

UBE upper band edge
UHF ultra high frequency

US&P United States and Possessions

VCO voltage controlled oscillator

VHF very high frequency VLDS very large data store

WARC-92 World Administrative Radio Conference - 1992

WC word count

CHAPTER 1

INTRODUCTION

1.1 General

The Telemetry Group (TG) of the Range Commanders Council (RCC) has prepared this document to foster the compatibility of telemetry transmitting, receiving, and signal processing equipment at the member ranges under the cognizance of the RCC. The range commanders highly recommend that telemetry equipment operated by the ranges and telemetry equipment used in programs that require test range support, conform to these standards.

1.2 Scope

These standards do not necessarily define the existing capability of any test range, but constitute a guide for the orderly implementation and application of telemetry systems for both the ranges and range users. The scope of capabilities attainable with the utilization of these standards requires a careful consideration of tradeoffs. Guidance concerning these tradeoffs is provided in the text.

1.3 Purpose

These standards provide the necessary criteria on which to base equipment design and modification. The ultimate purpose is to ensure efficient spectrum utilization, interference-free operation, interoperability between ranges, and compatibility of range user equipment with the ranges.

- 1.3.1 A companion series, RCC document 118, <u>Test Methods for Telemetry Systems and Subsystems</u>, and RCC document 119, <u>Telemetry Applications Handbook</u>, have been published in conjunction with this standard.
- 1.3.2 The policy of the Telemetry Group is to update the telemetry standards and test methods as required to be consistent with advances in the state of the art. To determine the current revision status, contact the RCC Secretariat at White Sands Missile Range, New Mexico at (505) 678-1107 or DSN 258-1107.

1.4 Reference Documents

Reference documents are identified at the point of reference.

1.5 Definitions

Commonly used terms are defined in standard reference glossaries and dictionaries.

Definitions of terms with special applications are included when the term first appears. Radio frequency terms are defined in the <u>Manual of Regulations and Procedures for Federal Radio Frequency Management</u>. Copies of this manual may be obtained from

Executive Secretary, IRAC
U.S. Department of Commerce, NTIA
Room 1605, HCHB Building
14th & Constitution Ave., N.W.
Washington, D.C. 20230

1.6 General Statements and Requirements

General statements and requirements are contained in each chapter of this document and the appendixes.

CHAPTER 2



TRANSMITTER AND RECEIVER SYSTEMS

2.1 Radio Frequency Standards for Telemetry

These standards provide the criteria to determine equipment and frequency use requirements and are intended to ensure efficient and interference-free use of the radio frequency spectrum and interchange of operations and data between test ranges. The radio frequency spectrum is a limited natural resource; therefore, efficient use of available spectrum is mandatory. In addition, susceptibility to interference must be minimized. Systems not conforming to these standards require justification upon application for frequency allocation, and the use of such systems is highly discouraged. The standards contained herein are derived from the National Telecommunications and Information Administration's (NTIA) Manual of Regulations and Procedures for Federal Radio Frequency Management.

2.2 Definitions

Allocation (of a Frequency Band). Entry of a frequency band into the Table of Frequency Allocations¹ for use by one or more radio communication services or the radio astronomy service under specified conditions.

Assignment (of a Radio Frequency or Radio Frequency Channel). Authorization given by an administration for a radio station to use a radio frequency or radio frequency channel under specified conditions.

<u>Authorization</u>. Permission to use a radio frequency or radio frequency channel under specified conditions.

Occupied Bandwidth. The width of a frequency band such that below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage of the total mean power of a given emission. Unless otherwise specified by the International Telecommunication Union (ITU) for the appropriate class of emission, the specified percentage shall be 0.5 percent. The occupied bandwidth is also called the 99-percent power bandwidth in this document.

¹The definitions of the radio services that can be operated within certain frequency bands contained in the radio regulations as agreed to by the member nations of the International Telecommunications Union. This table is maintained in the United States by the Federal Communications Commission and the NTIA.

<u>Primary Service</u>. A service that has full rights in a band of frequencies and can claim protection from harmful interference from other services.

Secondary Service. Service that can be obtained on a noninterference operation basis with primary service users. Stations of a secondary service shall not cause harmful interference to stations of a primary service and cannot claim protection from interference from stations of a primary service; however, they can claim protection from harmful interference from other secondary stations to which frequencies were assigned at a later date.

2.3 UHF Bands

The bands used for telemetry are described unofficially as the L band from 1435 to 1535 MHz, the S band from 2200 to 2300 MHz, and the upper S band from 2310 to 2390 MHz. While these band designations are common in telemetry parlance, they may have no specific meaning to anyone else. Telemetry assignments are made for testing² manned and unmanned aircraft, missiles, space vehicles, rocket sleds and systems carried on such sleds, or for testing their major components.

- 2.3.1 Allocation of the L Band (1435 to 1535 MHz). This band is allocated in the United States of America and its possessions for government and nongovernment aeronautical telemetry use on a shared basis. The nongovernment use of this band is coordinated by the Aerospace and Flight Test Radio Coordinating Council (AFTRCC). The frequencies in this range will be assigned for aeronautical telemetry and associated remote-control operations³ for testing of manned or unmanned aircraft, missiles, rocket sleds, and other vehicles or their major components. Authorized usage includes telemetry associated with launching and reentry into the Earth's atmosphere as well as any incidental orbiting prior to reentry of manned or unmanned vehicles undergoing flight tests. The following frequencies are shared with flight telemetering mobile stations: 1444.5, 1453.5, 1501.5, 1515.5, 1524.5, and 1525.5 MHz.
- 2.3.1.1 <u>1435 to 1525 MHz</u>. This frequency range is allocated for the exclusive use of aeronautical telemetry in the United States of America.
- 2.3.1.2 <u>1525 to 1530 MHz</u>. The 1525- to 1530-MHz band was reallocated at the 1992 World Administrative Radio Conference (WARC-92). The Mobile-Satellite Service is now a primary service in this band. The Mobile Service (includes aeronautical telemetry) is now a secondary service in this band.

²A telemetry system as defined here is not critical to the operational (tactical) function of the system.

³The word used for remote control operations in this band is *telecommand*.

- 2.3.1.3 <u>1530 to 1535 MHz</u>. The Maritime Mobile-Satellite Service is a primary service in the frequency band from 1530 to 1535 MHz.⁴ The Mobile Service (including aeronautical telemetry) is a secondary service in this band.
- 2.3.2 <u>Allocation of the S Band (2200 to 2300 MHz)</u>. No provision is made in this band for the flight testing of manned aircraft.
- 2.3.2.1 2200 to 2290 MHz. These frequencies are shared equally by the United States Government's fixed, mobile, space research, space operation and Earth exploration-satellite services. These frequencies include telemetry associated with launch vehicles, missiles, upper atmosphere research rockets, and space vehicles regardless of their trajectories.
- 2.3.2.2 2290 to 2300 MHz. Allocations in this range are for the space research service (deep space only) on a shared basis with the fixed and mobile (except aeronautical mobile) services.
- 2.3.3 <u>Allocation of the Upper S Band (2310 to 2390 MHz)</u>. This band is allocated to the radiolocation and mobile services in the United States of America. Government and nongovernment telemetry users share this band in a manner similar to that of the L band. Telemetry assignments are made for flight testing of manned or unmanned aircraft, missiles, space vehicles, or their major components. The frequencies 2312.5, 2332.5, 2352.5, 2364.5, 2370.5, and 2382.5 MHz are also designated for use by both government and nongovernment stations on a co-equal basis for telemetering and associated telecommand operations for expendable and reusable launch vehicles whether or not such operations involve flight testing. Such uses will be limited to 1-MHz bandwidths.
- 2.3.3.1 2310 to 2360 MHz. These frequencies have been reallocated and were auctioned by the Federal Communications Commission in April 1997. The Wireless Communications Service is the primary service in the frequencies 2305-2320 MHz and 2345-2360 MHz. The Digital Audio Radio Satellite Service is the primary service in the 2320-2345 MHz band. In the band 2310-2360 MHz, the mobile and radiolocation services are allocated on a primary basis until 1 January 1997 or until broadcasting-satellite (sound) service has been brought into use in such a manner as to affect or be affected by the mobile and radiolocation services in those service areas, whichever is later. Aeronautical telemetry will become a secondary service when these services start using the band.
- 2.3.3.2 2360 to 2390 MHz. The Mobile Service (including aeronautical telemetry) is a primary service in this band. The Balanced Budget Act of 1997 resulted in the reallocation of 2385-2390 MHz to other applications. The Mobile Service will no longer be a primary service in this frequency range after 2005 (or 2007 in some areas).

⁴Reallocated as of 1 January 1990.

2.4 <u>UHF Telemetry Transmitter Systems</u>

Air- and space-ground telemetry is accommodated in the appropriate UHF bands 1435 to 1535, 2200 to 2300, and 2310 to 2390 MHz as described in paragraph 2.3.

- 2.4.1 <u>Center Frequency Tolerance</u>. Unless otherwise dictated by a particular application, the frequency tolerance for a telemetry transmitter shall be ± 0.002 percent of the transmitter's assigned center frequency. Transmitter designs shall control transient frequency errors associated with startup and power interruptions. During the first second after turn on, the transmitter output frequency shall be within the occupied bandwidth of the modulated signal at any time when the transmitter output power exceeds -25 dBm. Between 1 and 5 seconds after initial turn on, the transmitter frequency shall remain within twice the specified limits for the assigned radio frequency. After 5 seconds, the standard frequency tolerance is applicable for any and all operations where the transmitter power output is -25 dBm or greater (or produces a field strength greater than 320 μ V/meter at a distance of 30 meters from the transmitting antenna in any direction). Specific uses may dictate tolerances more stringent than those stated.
- 2.4.2 Channel Bandwidth Definitions. Channel bandwidths are defined below.
- 2.4.2.1 <u>Standard Bandwidth Signal</u>. A standard bandwidth signal occupies a bandwidth less than or equal to 1 MHz.
- 2.4.2.2 <u>Wide Bandwidth Signal</u>. A wide bandwidth signal occupies a bandwidth greater than 1 MHz.⁵
- 2.4.3 <u>Channelization</u>. Channel spacings for all types of telemetry uses are described in the following subparagraphs.
- 2.4.3.1 <u>Standard Bandwidth Channels</u>. Standard bandwidth channel spacing is in increments of 1 MHz, beginning 500 kHz from the lower band edge, such as 1435.5, 1436.5, and 1437.5 MHz. By definition, the band edges of a standard bandwidth channel cannot fall outside the allocated band.
- 2.4.3.2 <u>Wide Bandwidth Channels</u>. Channels with bandwidths greater than 1 MHz are assigned channels on spacings as standard bandwidth channels. The resulting spectrum is not allowed to fall outside the allocated band.

⁵Telemetry systems with bandwidths greater than 10 MHz, operating on the standard telemetry bands, are highly discouraged.

- 2.4.4 Output Power. Emitted power levels shall always be limited to the minimum required for the application. The output power shall not exceed 25 watts⁶. The effective isotropic radiated power (EIRP) shall not exceed 25 watts⁷.
- 2.4.5 <u>Modulation</u>. The traditional modulation methods for aeronautical telemetry are frequency modulation and phase modulation. Frequency and phase modulation have a variety of desirable features but may not provide the required bandwidth efficiency especially for higher bit rates. When better bandwidth efficiency is required, the standard method for digital signal transmission is Feher's-patented quadrature phase shift keying (FQPSK-B). FQPSK-B is a nearly constant envelope and is compatible with non-linear amplifiers with minimal spectral regrowth and minimal degradation of detection efficiency. Additional FQPSK-B characteristics are discussed in section 7 of Appendix A.
- 2.4.5.1 <u>Characteristics of FQPSK-B</u>. FQPSK-B is described in Digcom Inc. document, "FQPSK-B, Revision A1, Digcom-Feher Patented Technology Transfer Document, January 15, 1999". This document can be obtained under a license from:

Digcom Inc.
44685 Country Club Drive
El Macero, CA 95618
Telephone: 530-753-0738
FAX: 530-753-1788

2.4.5.1.1 <u>Differential Encoding</u>. Differential encoding shall be provided and shall be consistent with the following definitions:

The NRZ-L data bit sequence $\{b_n\}$ is sampled periodically by the transmitter at time instants

$$t = nT_b n = 0,1,2,\dots$$

where T_b is the NRZ-L bit period. Using the bit index values n as references to the beginning of symbol periods, the differential encoder alternately assembles I channel and Q channel symbols to form the sequences

⁶An exemption from this power limit will be considered; however, systems with transmitter power levels greater than 25 watts will be considered nonstandard systems and will require additional coordination with affected test ranges.

⁷An exemption from this EIRP limit will be considered; however, systems with EIRP levels greater than 25 watts will be considered nonstandard systems and will require additional coordination with affected test ranges.

$$I_2, I_4, I_6, \dots$$
 and Q_3, Q_5, Q_7, \dots

according to the following rules:

$$I_{2n} = b_{2n} \oplus \overline{Q}_{(2n-1)}$$
 $n > 0$ (2-1)

$$Q_{(2n+1)} = b_{(2n+1)} \oplus I_{2n} \qquad n > 0$$
 (2-2)

where \oplus denotes the exclusive-or operator, and the bar above a variable indicates the 'not' or inversion operator. Q channel symbols are offset (delayed) relative to I channel symbols by one bit period.

- 2.4.5.1.2 <u>Data Randomization</u>. The data input to the transmitter shall be randomized using either an encryptor that provides randomization or an Interrange Instrumentation Group (IRIG) 15-bit randomizer as described in Chapter 6 and Appendix D. The purpose of the randomizer is to prevent degenerative data patterns from degrading data quality.
- 2.4.5.1.3 Quadrature Modulator Phase Map. Table 2-1 lists the mapping from the input to the modulator (after differential encoding and FQPSK-B wavelet assembly) to the carrier phase of the modulator output. The amplitudes in table 2-1 are \pm a, where "a" is a normalized amplitude.

TABLE 2-1. FQPSK-B PHASE MAP.			
I Channel	Q Channel	Resultant Phase	
a	a	45 degrees	
-a	a	135 degrees	
-a	-a	225 degrees	
a	-a	315 degrees	

2.4.5.1.4 <u>Bit Rate</u>. The bit rate range for FQPSK-B shall be between 1 Mb/s and 20 Mb/s.

2.4.5.1.5 <u>Transmitter Phase Noise</u>. The sum of all discrete spurious spectral components (single sideband) shall be less than -36 dBc. The continuous single sideband phase noise power spectral density (PSD) shall be below the curve shown in figure 2-1. The maximum frequency for the curve in figure 2-1 is one-fourth of the bit rate. For bit rates greater than 4 Mb/s, the phase noise PSD shall be less than -100 dBc/Hz between 1 MHz and one-fourth of the bit rate.

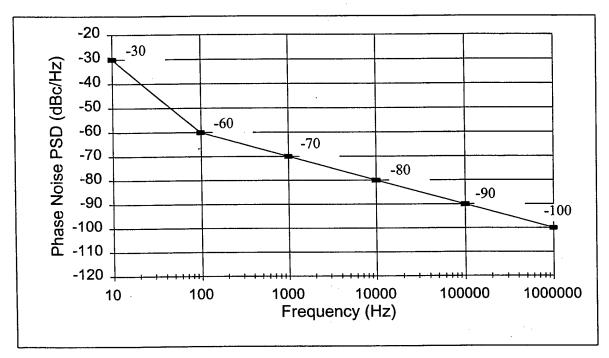


Figure 2-1. Continuous single sideband phase noise power spectral density.

2.4.5.1.6 <u>Carrier Suppression</u>. The remnant carrier level shall be no greater than -25 dBc. Paragraph 7.0 of Appendix A contains additional discussion of carrier suppression.

2.4.5.2 <u>Modulation Polarity</u>. An increasing voltage at the input of a frequency modulation (FM) transmitter shall cause an increase in output carrier frequency. An increase in voltage at the input of a phase modulation (PM) transmitter shall cause an advancement in the phase of the output carrier. An increasing voltage shall cause an increase in the output power of an amplitude modulation (AM) transmitter.

2.4.6 Spurious Emission and Interference Limits. Spurious⁸ emissions from the transmitter case, through input and power leads, and at the transmitter radio frequency (RF) output and antenna-radiated spurious emissions are to be within required limits shown in MIL-STD-461,

⁸Any unwanted signal or emission is spurious whether or not it is related to the transmitter frequency (harmonic).

Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference, when measured by the methods and equipment shown in MIL-STD-462, Electromagnetic Interference Characteristics, Measurement. Other applicable standards and specifications may be used in place of MIL-STD-461 and MIL-STD-462, if necessary.

- 2.4.6.1 <u>Transmitter-Antenna System Emissions</u>. Emissions from the antenna are of primary importance. For example, a tuned antenna may or may not attenuate spurious frequency products produced by the transmitter, and an antenna or multi-transmitter system may generate spurious outputs when a pure signal is fed to its input. The transmitting pattern of such spurious frequencies is generally different from the pattern at the desired frequency. Spurious outputs in the transmitter output line shall be limited to -25 dBm. Antenna-radiated spurious outputs shall be no greater than 320 µV/meter at 30 meters in any direction.
- 2.4.6.2 <u>Conducted and Radiated Interference</u>. Interference (and the RF output itself) radiated from the transmitter or fed back into the transmitter power, signal, or control leads could interfere with the normal operation of the transmitter or the antenna system to which the transmitter is connected. All signals conducted by the transmitter's leads (other than the RF output cable) in the range of 150 kHz to 50 MHz, and all radiated fields in the range of 150 kHz to 10 GHz (or other frequency ranges as specified) must be within the limits of the applicable standards or specifications.
- 2.4.7 Operational Flexibility. Each transmitter shall be capable of operating at all frequencies within its allocated band without design modification⁹.
- 2.4.8 Modulated Transmitter Bandwidth. Telemetry applications covered by this standard shall use 99-percent power bandwidth to define occupied bandwidth and -25 dBm bandwidth as the primary measure of spectral efficiency. The -25 dBm bandwidth is the minimum bandwidth that contains all spectral components that are -25 dBm or larger. A power level of -25 dBm is exactly equivalent to an attenuation of the transmitter power by $55 + 10 \times \log(P)$ dB where P is the transmitter power expressed in watts. The spectra are assumed symmetrical about the transmitter's center frequency unless specified otherwise. All spectral components larger than $-(55 + 10 \times \log(P))$ dBc at the transmitter output must be within the spectral mask calculated using the following equation:

$$M(f) = K + 90 \log R - 100 \log |f - f_c|; \qquad |f - f_c| \ge \frac{R}{m}$$
 (2-3)

where

M(f) = power relative to P (i.e., units of dBc) at frequency f (MHz) K = -20 for analog signals

⁹The intent is that fixed frequency transmitters can be used at different frequencies by changing crystals or other components. All applicable performance requirements will be met after component change.

¹⁰These bandwidths are measured using a spectrum analyzer with the following settings: 10-kHz resolution bandwidth, 1-kHz video bandwidth, and max hold detector.

K = -28 for binary signals

K = -63 for quaternary signals (e.g., FQPSK-B)

 f_c = transmitter center frequency (MHz)

R = bit rate (Mb/s) for digital signals or

 $(\Delta f + f_{\text{max}})$ (MHz) for analog FM signals

m = number of states in modulating signal;

m = 2 for binary signals

m = 4 for quaternary signals and analog signals

 Δf = peak deviation

 f_{max} = maximum modulation frequency

Note that the mask in this standard is different than the mask contained in the 1996 and 1999 versions of the <u>Telemetry Standards</u>, and, in general, narrower. Equation (2-3) does not apply to spectral components separated from the center frequency by less than R/m. The -25 dBm bandwidth is not required to be narrower than 1 MHz. Binary signals include all modulation signals with two states while quaternary signals include all modulation signals with four states (quadrature phase shift keying and FQPSK-B are two examples of four-state signals). Appendix A, paragraph 6.0, contains additional discussion and examples of this spectral mask.

2.5 UHF Telemetry Receiver Systems

As a minimum, UHF receiver systems shall have the following characteristics:

- 2.5.1 <u>Spurious Emissions</u>. The RF energy radiated from the receiver itself or fed back into the power supply, and/or the RF input, output, and control leads in the range from 150 kHz to 10 GHz shall be within the limits specified in MIL-STD 461. It shall be tested in accordance with MIL-STD 462 or RCC Document 118, volume II, <u>Test Methods for Telemetry RF Subsystems</u>. Other applicable standards and specifications may be used in place of MIL-STD-461 and MIL-STD-462, if necessary.
- 2.5.2 <u>Frequency Tolerance</u>. The accuracy of all local oscillators within the receiver shall be such that the conversion accuracy at each stage and overall is within ± 0.001 percent of the indicated tuned frequency under all operating conditions for which the receiver is specified.
- 2.5.3 <u>Receiver Phase Noise</u>. The sum of all discrete spurious spectral components (single sideband) shall be less than -39 dBc. The continuous single sideband phase noise power spectral density (PSD) shall be 3 dB below the curve shown in figure 2-1. The maximum frequency for the curve in figure 2-1 is one-fourth of the bit rate. For bit rates greater than 4 Mb/s, the phase noise PSD shall be less than -103 dBc/Hz between 1 MHz and one-fourth of the bit rate.

- 2.5.4 <u>Spurious Responses</u>. Rejection of any frequency other than the one to which the receiver is tuned shall be a minimum of 60 dB referenced to the desired signal over the range 150 kHz to 10 GHz.
- 2.5.5 Operational Flexibility. All ground-based receivers shall be capable of operating over the entire band for which they are designed. External downconverters may be either intended for the entire band or a small portion but capable of retuning anywhere in the band without modification.
- 2.5.6 <u>Intermediate Frequency Bandwidths</u>. The standard receiver intermediate frequency (IF) bandwidths are shown in table 2-2. These bandwidths are separate from and should not be confused with post-detection low-pass filtering that receivers provide¹¹. The ratio of the receiver's -60 dB bandwidth to the -3 dB bandwidth shall be less than 5.



For data receivers, the IF bandwidth should typically be selected so that 90 to 99 percent of the transmitted spectrum is within the receiver 3-dB bandwidth. In most cases, the

optimum IF bandwidth will be narrower than the 99-percent power bandwidth measured using the method outlined in Appendix A, subparagraph 5.2.1.

TABLE 2-2. S	TANDARD RECEIVER IF B.	ANDWIDTHS.
300 kHz†	1.5 MHz‡	6 MHz‡
500 kHz†	2.4 MHz‡	10 MHz‡
750 kHz†	3.3 MHz‡	15 MHz‡
1000 kHz†	4.0 MHz‡	20 MHz‡

[‡] see note next page

[†] see note next page

¹¹In most instances, the output low-pass filter should *not* be used to "clean up" the receiver output prior to use with demultiplexing equipment.

NOTE

- 1. Bandwidths are expressed at the points where response is 3 dB below the response at the design center frequency, assuming that passband ripple is minimal, which may not necessarily be the case. The 3-dB bandwidth is chosen, because it closely matches the noise bandwidth of a "brick-wall" filter of the same bandwidth. The "optimum" bandwidth for a specific application may be other than that stated here. Ideal IF filter response is symmetrical about its center frequency; in practice, this may not be the case.
- 2. Not all bandwidths are available on all receivers or at all test ranges. Additional receiver bandwidths may be available at some test ranges.
- 3. (†) Bandwidths are for use with standard bandwidth channels.
- 4. (‡) Bandwidths are for use with wide bandwidth channels.

CHAPTER 3

FREQUENCY DIVISION MULTIPLEXING TELEMETRY STANDARDS

3.1 General

In frequency division multiplexing, each data channel makes use of a separate subcarrier which occupies a defined position and bandwidth in the modulation baseband of the RF carrier. Two types of frequency modulation (FM) subcarrier formats may be used. The data bandwidth of one format type is proportional to the subcarrier center frequency, while the data bandwidth of the other type is constant, regardless of subcarrier frequency.

3.2 FM Subcarrier Characteristics

In these systems, one or more subcarrier signals, each at a different frequency, are employed to frequency modulate (FM) or phase modulate (PM) a transmitter in accordance with the RF conditions specified in chapter 2. The following subparagraphs set forth the standards for utilization of FM frequency division multiplexing.

- 3.2.1 Each of the subcarriers conveys measurement data in FM form. The number of data channels may be increased by modulating one or more of the subcarriers with a time-division multiplex format such as pulse-code modulation (PCM).
- 3.2.2 The selecting and grouping of subcarrier channels depend upon the data bandwidth requirements of the application at hand and upon the necessity to ensure adequate guard bands between channels. Combinations of both proportional-bandwidth channels and constant-bandwidth channels may be used.

3.3 FM Subcarrier Channel Characteristics

The following subparagraphs describe the characteristics of proportional-bandwidth and constant-bandwidth FM subcarrier channels.

3.3.1 <u>Proportional-Bandwidth FM Subcarrier Channel Characteristics</u>. Table 3-1 lists the standard proportional-bandwidth FM subcarrier channels. The channels identified with letters permit ± 15 or ± 30 percent subcarrier deviation rather than ± 7.5 percent deviation but use the same frequencies as the 12 highest channels. The channels shall be used within the limits of maximum subcarrier deviation. See appendix B for expected performance tradeoffs at selected combinations of deviation and modulating frequency.

Ø		Minimum	Rise	Time	(ms)	11.7	8.33	6.40	4.86	3.60	2.74	2.03	1.56	1.20	.864	.635	.444	.322	.212	.156	117	080	90	00.	.050	.038	.029	.021	910.	.012	800.
OPORTIONAL-BANDWIDTH FM SUBCARRIER CHANNELS		Maximum	Frequency	Response	(Hz)	30	42	55	72	86	128	173	225	293	405	551	788	1088	1650	2250	2000	3000	5950	0576	6975	9300	12 375	16 875	22 500	30 000	42 000
UBCARRI		Nominal	Rise	Time	(ms)	58	44	32	25	18	14	10	7.8	0.9	4.3	3.2	2.2	1.6	- ::	7.1		8C.	44.	.33	.25	.19	.14	.10	80.	90.	.04
WIDTH FM S	±7.5% CHANNELS	Nominal	Frequency	Response	(Hz)	9	∞	11	14	20	25	35	45	59	81	110	160	220	077	330 450	000	009	88/	1050	1395	1860	2475	3375	4500	0009	8400
ONAL-BAND	±7.5% C	Upper	Deviation	Limit	(Hz)	430	602	785	1032	1398	1828	2473	3225	4193	5805	7901	11 288	15 500	13 388	23 650	32.230	43 000	56 438	75 250	99 975	133 300	177 375	241 875	322 500	430 000	602 000
PROPORTI		Lower	Deviation	Limit	(Hz)	370	518	675	888	1202	1572	2127	2775	3607	4008	6700	9712	12.410	13 412	20 350	06/ /7	37 000	48 562	64 750	86 025	114 700	152 625	208 125	277 500	370 000	518 000
TABLE 3-1.			Conter	Frequencies	(Hz)	400	095	730	090	1300	1700	2300	3000	3900	2200	3400	10 500	10.000	14 500	22 000	30 000	40 000	52 500	70 000	93 000	124 000	165 000	225 000	300 000	400 000	260 000
				٠	Channel	1	. С	4 ("		4	י פ	2 7	~ 0	o c	,	01	11	71	13	14	15	16	. 17	18	10) C	2.0	27	77 6	6.7	25

See notes at end of table.

ANNELS	Maximum Minimum Frequency Rise Response Time (Hz) (ms) 3300 .106 4500 .078 6000 .058 7875 .044 10 500 .033 13 950 .025 18 600 .018 24 750 .014 33 750 .010 45 000 .008 60 000 .006 84 000 .004	
W SUBCARRIER CH	Nominal Rise Time (ms) (ms) .39 .29 .29 .17 .13 .09 .07 .05 .03	
FD); PROPORTIONAL-BANDWIDTH FM SUBCARRIER CHANNELS ±15% CHANNELS	Upper Nominal Deviation Frequency Limit Response (Hz) (Hz) 25 300 660 34 500 900 46 000 1200 60 375 1575 80 500 2100 106 950 2790 142 600 3720 189 750 4950 258 750 6750 345 000 9000 460 000 16 800 644 000 16 800	
<u>nt'd); proportioi</u> ±1	Lower U Deviation De Limit (Hz) 18 700 25 500 34 000 44 625 59 500 79 050 105 400 140 250 191 250 255 000 340 000 476 000	
TABLE 341 (CON	Center Frequencies (Hz) 22 000 30 000 40 000 70 000 93 000 124 000 165 000 225 000 300 000 400 000 560 000	200 000
	Chatmel B C C C D E E E H H H K K	<u>۔</u>

See notes at end of table.

TAB	TABLE 3-1 (CONTE	<u>f'd), proportional-bandwidth fwsubcarrier channels</u> ±30% channels	IONAL-BANDWID ±30% CHANNELS	WIDTH FW S	SUBCARRIE	RCHANNEL	V
		Lower	Upper	Nominal	Nominal	Maximum	Minimum
•	Center	Deviation	Deviation	Frequency	Rise	Frequency	Rise
	Frequencies	Limit	. Limit	Response	Time	Response	Time
Channel	(Hz)	(Hz)	(Hz)	(Hz)	(ms)	(Hz)	(ms)
AA	22.000	15 400	28 600	1320	.265	0099	.053
RR	30 000	21 000	39 000	1800	.194	0006	.038
3 2	40 000	28 000	52 000	2400	.146	12 000	.029
CIC CIC	52 500	36 750	68 250	3150	.111	15 750	.022
H. H.	000 02	49 000	91 000	4200	.083	21 000	.016
臣	93 000	65 100	120 900	2580	.063	27 900	.012
GG.	124 000	86 800	161 200	7440	.047	37 200	600.
H	165 000	115 500	214 500	0066	.035	49 500	.007
	225 000	157 500	292 500	13 500	.026	67 500	.005
II	300 000	210 000	390 000	18 000	610.	000 06	.004
KK	400 000	280 000	520 000	24 000	.015	120 000	.003
11	260 000	392 000	728 000	33 600	.010	168 000	.002

Round off to nearest Hz.

The indicated maximum data frequency response and minimum rise time is based on the maximum theoretical response that can be obtained in a bandwidth between the upper and lower frequency limits specified for the channels. See appendix B, paragraph 3.0 for determining possible accuracy versus response tradeoffs. Channels A through L may be used by omitting adjacent lettered and numbered channels. Channels 13 and A may be used together with some increase in adjacent channel interference.

Channels AA through LL may be used by omitting every four adjacent double lettered and lettered channels and every three adjacent numbered channels. Channels AA through LL may be used by omitting every three adjacent double lettered and lettered channels and every two adjacent numbered channels with some increase in adjacent channel interference. 3.3.2 <u>Constant-Bandwidth FM Subcarrier Channel Characteristics</u>. Table 3-2 lists the standard constant-bandwidth FM subcarrier channels. The letters A, B, C, D, E, F, G, and H identify the channels for use with maximum subcarrier deviations of ± 2 , ± 4 , ± 8 , ± 16 , ± 32 , ± 64 , ± 128 , and ± 256 kHz, along with maximum frequency responses of 2, 4, 8, 16, 32, 64, 128, and 256 kHz. The channels shall be used within the limits of maximum subcarrier deviation. See appendix B for expected performance tradeoffs at selected combinations of deviation and modulating frequencies.

3.4 Tape Speed Control and Flutter Compensation

Tape speed control and flutter compensation for FM/FM formats may be accomplished as indicated in subparagraph 6.8.4, chapter 6. The standard reference frequency used shall be in accordance with the criteria in table 3-3 when the reference signal is mixed with data.

	H CHANNELS	Deviation	limits = \pm 256 kHz	Nominal frequency	response = 51.2 kHz	Maximum frequency	response = 256 kHz	Center	Frequency	(kHz)	1024	2048	3072													annel center	iation limit;	I ±2 KH2.			num theoretical	stion limits	determining			should verify	or the channel	
BL/S.	G CHANNELS	Deviation	limits = \pm 128 kHz	Nominal frequency	response = 25.6 kHz	Maximum frequency	response = 128 kHz	Center	Frequency	(kHz)	512	1024	1536	2048	2560	3072	3584								•	designation shall be the ch	annel letter indicating dev	: 16 kHz, deviation limit o			y is based upon the maxim	a bandwidth between devi	scussion in appendix B for	cy response trade offs.	,	he enclosed area, the user	support the demodulation available above 2 MHz.	available accret a recorr
ANT-BANDWIDTH FM SUBCARRIER CHANNELS.	F CHANNELS	Deviation	limits = ± 64 kHz	Nominal frequency	response = 12.8 kHz	Maximum frequency	response = 64 kHz	Center	Frequency	(kHz)	256	512	292	1024	1280	1536	1792	2048	2304	2560	2816	3072	3328	3584	3840	The constant-bandwidth channel designation shall be the channel center	frequency in kilohertz and the channel letter indicating deviation limit;	for example, 16A, indicating $fc = 16 \text{ kHz}$, deviation limit of $\pm 2 \text{ kHz}$.	-		The indicated maximum frequency is based upon the maximum theoretical	response that can be obtained in a bandwidth between deviation limits	specified for the channel. See discussion in appendix B for determining	practical accuracy versus frequency response trade offs.		Prior to using a channel outside the enclosed area, the user should verify	the availability of range assets to support the demodulation of the channel	d. Vely minica support is
TIDTH FM SUBG	E CHANNELS	Deviation	limits = ± 32 kHz	Nominal frequency	response = 6.4 kHz	Maximum frequency	response = 32 kHz	Center	Frequency	(kHz)	128	256	384	512	. 640	292	968	1024	1152	1280	1408	1536	1664	1792		•			2432	2560	2688 The inc	2816 respon	specifi	practic		Prior t	the ava	אסוסרום
STANT-BANDW	D CHANNELS	Deviation	limits = \pm 16 kHz	Nominal frequency	response = 3.2 kHz	Maximum frequency	response = 16 kHz	Center	Frequency	(kHz)	64	128	192	256	320	384	448	512	276	640	704	768	832	968	096	1024	1088	1152	1216	1280	1344	1408						
TABLE 3-2. CONST	CCHANNELS	Deviation	$limits = \pm 8 \text{ kHz}$	Nominal frequency	response = 1.6 kHz	Maximum frequency	response = 8 kHz	Center	Frequency	(kHz)	32	99	96	128	160	192	224	256	288	320	352	384	416	448	480	512	544	276	809	640	672	704						
	B CHANNELS	Deviation	limits = ± 4 kHz	Nominal frequency	response = 0.8 kHz	Maximum frequency	response = 4 kHz	Center	Frequency	(kHz)	91	32	48	. 64	80	96	112	128	144	160	176	192	208	224	240	256	272	288	304	320	336	352						
	A CHANNELS	Deviation	limits = $\pm 2 \text{ kHz}$	Nominal frequency	response = 0.4 kHz	Maximum frequency Maximum frequency	resnonse = 2 kHz	Center	Frequency	(kHz)	×) 1	24	32	40	48	56	64	72	08	88	96	104	112	120	128	136	144	152	160	168	176						

TABLE 3-3. REFERENCE SIGNAL USAGE

Reference Frequencies for Tape Speed and Flutter Compensation

Reference Frequency (kHz ±0.01%)

960¹
480¹
240¹
200
100
50
25
12.5
6.25
3.125

If the reference signal is recorded on a separate tape track, any of the listed reference frequencies may be used provided the requirements for compensation rate of change are satisfied.

If the reference signal is mixed with the data signal, consideration must be given to possible problems with intermodulation sum and difference frequencies. Also, sufficient guard band must be allowed between the reference frequency and any adjacent data subcarrier.

¹These frequencies are for flutter compensation only and not for capstan servo speed control. In addition, the 240 kHz reference signal may be used as a detranslation frequency in a constant-bandwidth format.

CHAPTER 4

PULSE CODE MODULATION STANDARDS

4.1 General

Pulse code modulation (PCM) data are transmitted as a serial bit stream of binary-coded time-division multiplexed words. When PCM is transmitted, premodulation filtering shall be used to confine the radiated RF spectrum in accordance with appendix A. These standards define pulse train structure and system design characteristics for the implementation of PCM telemetry formats. Additional information and recommendations are provided in appendix C and in RCC document 119, <u>Telemetry Applications Handbook</u>.

4.2 Class Distinctions and Bit-Oriented Characteristics

The PCM formats are divided into two classes for reference. Serial bit stream characteristics are described below prior to frame and word oriented definitions.

- 4.2.1 <u>Class I and Class II Distinctions</u>. Two classes of PCM formats are covered in this chapter: the basic, simpler types are class I, and the more complex applications are class II. The use of any class II technique requires concurrence of the range involved. All formats with characteristics described in these standards are class I except those identified as class II. The following are examples of class II characteristics:
 - bit rates greater than 5 megabits per second (see subparagraph 4.2.2.3)
 - word lengths in excess of 16 bits (subparagraph 4.3.1.1)
 - fragmented words (subparagraph 4.3.1.2)
 - more than 8192 bits or 1024 words per minor frame (subparagraph 4.3.2.1.1)
 - unevenly spaced supercommutation (subparagraph 4.3.2.4)
 - format changes (paragraph 4.4)
 - asynchronous embedded formats (paragraph 4.5)
 - tagged data formats (paragraph 4.6)
 - formats with data content other than unsigned straight binary, discretes, or complement arithmetic representation for negative numbers such as floating point variables, binary-coded decimal, and gain-and-value.
 - asynchronous data transmission (paragraph 4.8)
 - merger of multiple format types (such as chapter 8)



The use of fixed frame formats has been a common practice but does not fit all requirements. A verification of range capabilities should be made prior to incorporation of class II features into a telemetry system.

- 4.2.2 <u>Bit-Oriented Definitions and Requirements</u>. Definitions and requirements relating to serial PCM bit streams are described next.
- 4.2.2.1 <u>Binary Bit Representation</u>. The following code conventions for representing serial binary ones and zeros are the only permissible representations:

NRZ-L	•	Biø-L
NRZ-M		Biφ-M
NRZ-S		Biφ-S

Graphic and written descriptions of these conventions are shown in figure 4-1. Only one convention shall be used within a single PCM bit stream. If Randomized NRZ-L (RNRZ-L) is transmitted, it shall use the 15-bit regeneration pattern as described in chapter 6 and appendix D.

- 4.2.2.2 <u>Serial Bit Stream Transitions</u>. The transmitted or recorded bit stream shall be continuous and shall contain sufficient transitions to ensure bit acquisition and continued bit synchronization, taking into account the binary representation chosen. (See recommendation in paragraph 1.3, appendix C.)
- 4.2.2.3 <u>Bit Rate</u>. The RF and recording limits, defined in chapters 2 and 6, should be considered when determining maximum bit rates. The minimum bit rate shall be 10 bps. Bit rates greater than 5 Mbps are class II.
- 4.2.2.4 <u>Bit Rate Accuracy and Stability</u>. During any period of desired data, the bit rate shall not differ from the specified nominal bit rate by more than 0.1 percent of the nominal rate.
- 4.2.2.5 Bit Jitter. The bit jitter shall not exceed \pm 0.1 of a bit interval referenced to the expected transition time with no jitter. The expected transition time shall be based on the measured average bit period as determined during the immediately preceding 1000 bits.

4.3 Fixed Formats

Characteristics of fixed formats are described below. Fixed formats do not have changes during transmission with regard to frame structure, word length or location, commutation sequence, sample interval, or measurement list.

- 4.3.1 <u>Word-Oriented Definitions and Requirements</u>. The following definitions and requirements are addressed to word characteristics.
- 4.3.1.1 Word Length (Class I and II). Individual words may vary in length from 4 bits to not more than 16 bits in class I and not more than 64 bits in class II.


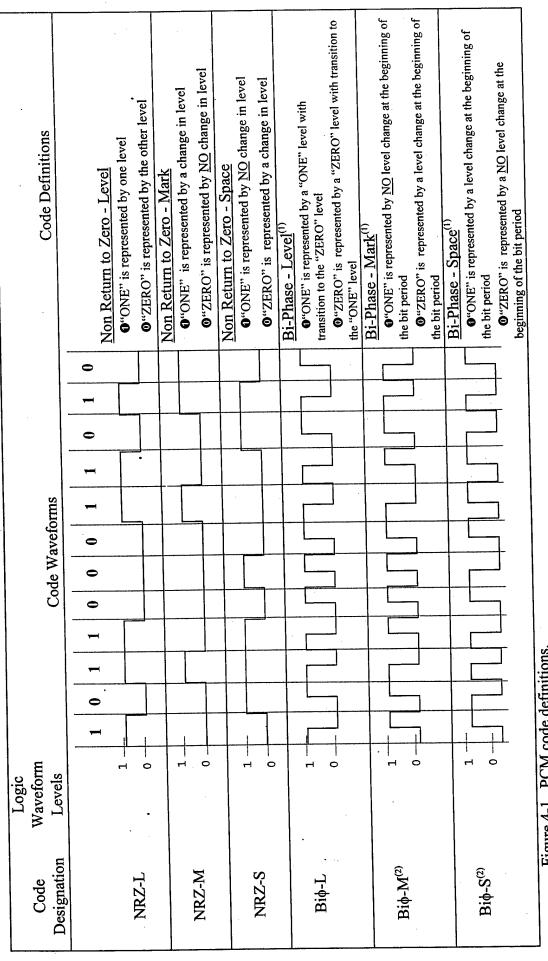


Figure 4-1. PCM code definitions.

(1) The Biø codes may be derived from the corresponding NRZ codes by inverting the level for the last half of each bit interval.

M definitions. The 106-93 Bi\u00ab-M and DBi\u00ab-S definitions were identical except for a possible inversion and a time delay of one-half bit period. The Bi\u00ab-S and DBi\u00ab-M codes were identical (2) The definitions of the mark and space versions of the bi-phase code have been reversed in various editions of the IRIG Telemetry Standards. The Telemetry Group included both definitions in the 1986 and 1993 versions of the Telemetry Standards. In 106-96, the Telemetry Group replaced the 106-93 Bio.-M and Bio.-S definitions with the 106-93 DBio.-S and DBio.-S with the same exceptions. The inversions do not change the data content, because the information is in the level changes (transitions) not the levels. The differential terminology and code designation have been dropped.

- 4.3.1.2 <u>Fragmented Words (Class II)</u>. A fragmented word is defined as a word divided into no more than eight segments and placed in various locations within a minor frame. The locations need not be adjacent. All word segments used to form a data word are constrained to the boundaries of a single minor frame. Fragmented synchronization words are not allowed.
- 4.3.1.3 <u>Bit Numbering</u>. To provide consistent notation, the most significant bit in a word shall be numbered "one." Less significant bits shall be numbered sequentially within the word.
- 4.3.1.4 Word Numbering. To provide consistent notation, the first word after the minor frame synchronization pattern shall be numbered "one" (see figure 4-2). Each subsequent word shall be numbered sequentially within the minor frame. Numbering within a subframe (see subparagraph 4.3.2.3.1) shall be "one" for the word in the same minor frame as the initial counter value for subframe synchronization and sequentially thereafter. Notations of W and S shall mean the W word position in the minor frame and S word position in the subframe.
- 4.3.2 <u>Frame Structure</u>. The PCM data shall be formatted into fixed length frames as defined in these sections regarding frame structure and in figure 4-2. Frames shall contain a fixed number of equal duration bit intervals.
- 4.3.2.1 <u>Minor Frame</u>. The minor frame is defined as the data structure in time sequence from the beginning of a minor frame synchronization pattern to the beginning of the next minor frame synchronization pattern.
- 4.3.2.1.1 Minor Frame Length (Class I and II). The minor frame length is the number of bit intervals from the beginning of the frame synchronization pattern to the beginning of the next synchronization pattern. The maximum length of a minor frame shall neither exceed 8192 bits nor 1024 words in class I and shall not exceed 16 384 bits in class II.
- 4.3.2.1.2 <u>Minor Frame Composition</u>. The minor frame shall contain the minor frame synchronization pattern, data words, and subframe synchronization words, if used. Words of different length may be multiplexed in a single minor frame. The length of a word in any identified word position within a minor frame shall be constant. Other words such as frame format identifiers may be needed within class II formats (see paragraph 4.4).
- 4.3.2.1.3 <u>Minor Frame Synchronization</u>. The minor frame synchronization information shall consist of a fixed digital word not longer than 33 consecutive bits and not shorter than 16 bits. Recommended synchronization patterns are given in table C-1, appendix C.
- 4.3.2.1.4 <u>Transmitted Frame Counter</u>. The frame counter provides a natural binary count corresponding to the minor frame number in which the frame count word appears. It is recommended that such a counter be included in all minor frames whether class I or class II and is especially desirable in class II formats to assist with data processing. The

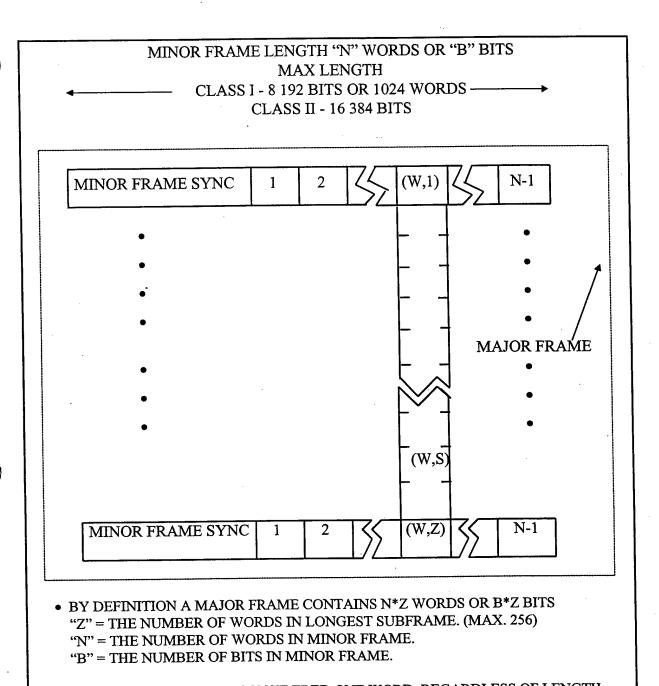

- MINOR FRAME SYNC IS CONSIDERED ONE WORD, REGARDLESS OF LENGTH
- "W" IS WORD POSITION IN THE MINOR FRAME
- "S" IS WORD POSITION IN THE SUBFRAME

Figure 4-2. PCM frame structure.

frame counter should be of nominal format word length and reset to start upcounting again after reaching maximum value. In formats where subcommutation is present, the subframe ID counter may serve as the frame counter.

- 4.3.2.2 <u>Major Frame</u>. A major frame contains the number of minor frames required to include one sample of every parameter in the format.
- 4.3.2.2.1 <u>Major Frame Length</u>. Major frame length is defined as minor frame length (N words or B bits) multiplied by the number of minor frames (Z) in the major frame. The maximum number of minor frames per major frame shall not exceed 256.
- 4.3.2.2.2 <u>Minor Frame Numbering</u>. To provide consistent notation, the first minor frame in a major frame shall be numbered "one." Each subsequent minor frame shall be numbered sequentially within the major frame.
- 4.3.2.3 <u>Subcommutation</u>. Subcommutation is defined as a sampling of parameters at submultiple rates (1/D) of the minor frame rate where the depth of a subframe, D, is an integer in the range of 2 to Z.
- 4.3.2.3.1 <u>Subframe</u>. Subframe is defined as one cycle of the parameters from a subcommutated minor frame word position. The depth, D, of a subframe is the number of minor frames in one cycle before repetition.
- 4.3.2.3.2 <u>Subframe Synchronization Method</u>. The standard method for subframe synchronization is to use a "subframe ID counter," a binary counter which counts sequentially up or down at the minor frame rate. The counter shall be located in a fixed position in each and every minor frame. A subframe ID counter should start with the minimum counter value when counting up or the maximum counter value when counting down. The counter should also be left or right justified in a word position. The start of a major frame shall coincide with the initial count for the deepest subframe.
- 4.3.2.4 <u>Supercommutation</u>. Supercommutation ("supercom") is defined as time-division-multiplex sampling at a rate which is a multiple of the minor frame rate. Supercommutation (on a minor frame) provides multiple samples of the same parameter in each minor frame. "Supercom on a subframe" is defined as time-division-multiplex sampling at a rate which is a multiple of the subframe rate and provides multiple samples of the same parameter within a subframe. For class I, supercommutated samples shall be evenly spaced. For class II, supercommutated samples should be as evenly spaced as practical.

4.4 Format Change (Class II)

Format change is defined as change with regard to frame structure, word length or location, commutation sequence, sample interval, or change in measurement list. Format changes shall occur only on minor frame boundaries. Bit synchronization shall be maintained and fill bits used instead of intentional dead periods. Format changes are inherently disruptive to test data processing; fixed format methods are preferred. Format change methods shall conform to the characteristics described in the following sections.

- 4.4.1 Frame Format Identification. A frame format identifier (FFI) is a word that shall uniquely identify a single format. In formats where change is required, the frame format identifier shall be placed in every minor frame. The format identifier shall be the same length (or multiples of) as the most common word length in the format and shall occur in a fixed position in the minor frame. The FFI shall identify the format applicable to the current minor frame. Frame synchronization pattern, FFI location, bit rate, and binary bit representation code shall not be changed. The FFI shall be constructed such that a single bit error cannot produce another valid FFI. The number of unique formats indicated shall not exceed 16.
- 4.4.2 <u>Format Change Implementation Methods</u>. The following subparagraphs describe format change implementation methods.
- 4.4.2.1 <u>Measurement List Change</u>. This method of format change consists of a modification in data content only and not format structure.
- 4.4.2.2 <u>Format Structure Change</u>. Defined as a format change where there is a departure in frame structure and not just data content.

4.5 Asynchronous Embedded Format (Class II)

Defined as a secondary data stream asynchronously embedded into a host major frame in a manner which does not allow predicting the location of embedded synchronization information based only on host format timing. The embedded frame segments shall be inserted as an integral number of words in every host minor frame. In this combined format, specific word positions in the host minor frame shall be dedicated to the embedded asynchronous format. No more than two asynchronous embedded formats are permitted.

4.6 Tagged Data Format (Class II)

Defined as a fixed frame length format having no applicable subframe or major frame definitions and characterized as a stream of data words, or blocks of words, with associated identifiers (tags). These formats consist of frame synchronization patterns, identifiers, data words, and fill words as required.

- 4.6.1 <u>Alternating Tag and Data</u>. This tagged data format consists of frames containing tag words alternating in time sequence with data words or blocks of words identified by the tags.
- 4.6.2 <u>Bus Data Military Standard (MIL-STD) 1553</u>. Telemetering of MIL-STD 1553 information is preferred to be restructured to conform to class I methods. If not, telemetered MIL-STD 1553 data shall conform to chapter 8, paragraph 8.6.

¹Defined in USAF Systems Command MIL-STD 1553, <u>Multiplex Applications</u> <u>Handbook</u>.

4.7 Time Words

The following paragraphs describe the formatting of time words within a PCM stream. A 16-bit standardized time word format and a method to insert time words into PCM word sizes other than 16-bits are described.

- 4.7.1 In 16-bit standardized time word format, there shall be three words dedicated to providing timing information. These words are designated high order time, low order time, and microsecond time. High and low order time words shall be binary or binary coded decimal (BCD) weighted, and microsecond words shall be binary weighted. Time word construction examples are shown in figure 4-3 and figure 4-4.
- 4.7.2 The microsecond time word shall have a resolution of 1 microsecond; that is, the least significant bit, bit 16, has a value of 0.000001 second. This word shall increment until it attains a value of 10 milliseconds at which time it will reset to zero. Thus the maximum value of the counter is 9999 (decimal).
- 4.7.3 The low order time word shall have a resolution of 10 milliseconds; that is, the least significant bit, bit 16, of the low order time word shall have a value of 0.010 second.
- 4.7.4 The high order time word shall have a resolution of 655.36 seconds when binary weighted; that is, the least significant bit, bit 16, has a value of 655.36 seconds. When BCD weighted, the least significant bit, bit 16, of the high order time word shall have a value of 1 minute. For BCD, the days field shall contain the three least significant characters of the BCD Julian Date.
- 4.7.5 It is recommended that high, low, and microsecond time words proceed the first data word in the minor frame. The time word order shall be high order time word, followed by low order time word, followed by microsecond time word. Microsecond time words may be used to tag individual data words, but care shall be taken that high order and low order time words be inserted at a rate necessary to resolve time ambiguities.
- 4.7.6 Time word insertion into PCM word sizes other than 16 bits shall be as follows: high order, low order, and microsecond time words shall be inserted into PCM words with time word bits occupying contiguous bit locations in the PCM word. The time word shall occupy contiguous PCM data words until the time word is contained in the PCM stream. If the time word size is not an integer multiple of the PCM word size and there are unused bits in the PCM word, the remaining unused bits in the last PCM word that contains the time word shall be fill bits with value 0. Figure 4.4 illustrates the insertion of time words into a PCM stream with word size of 12 bits.

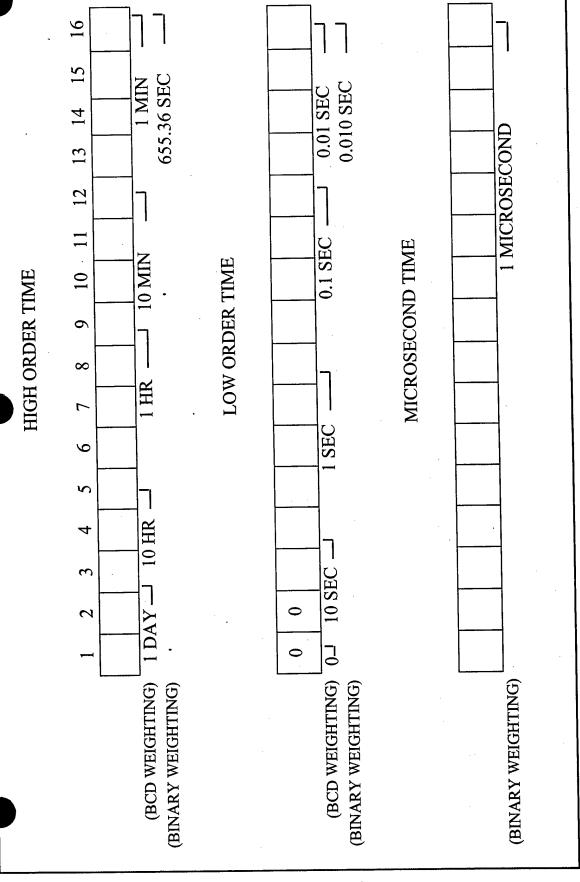


Figure 4-3. 16 bit standardized time word format.

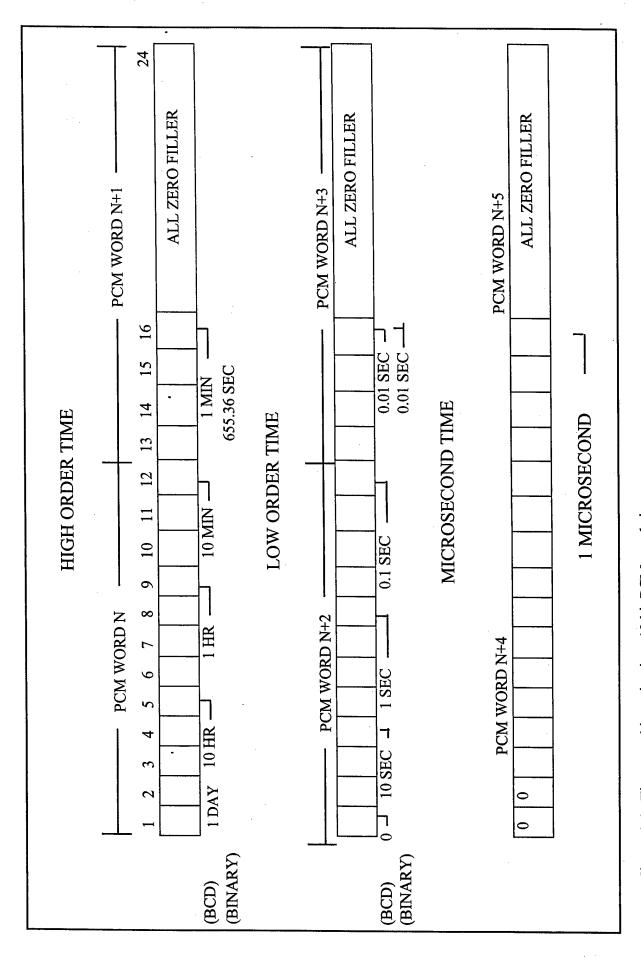


Figure 4-4. Time word insertion into 12 bit PCM word size.

4.7.6 Time word insertion into PCM word sizes other than 16 bits shall be as follows: high order, low order, and microsecond time words shall be inserted into PCM words with time word bits occupying contiguous bit locations in the PCM word. The time word shall occupy contiguous PCM data words until the time word is contained in the PCM stream. If the time word size is not an integer multiple of the PCM word size and there are unused bits in the PCM word, the remaining unused bits in the last PCM word that contains the time word shall be fill bits with value 0. Figure 4.4 illustrates the insertion of time words into a PCM stream with word size of 12 bits.

4.8 Asynchronous Data Merge

Asynchronous data is defined as an external sequential data stream (consisting of data bits, associated overhead, and optional parity, all at an autonomous update rate) which is a candidate for insertion into a primary or "host" PCM format. Common examples are RS-232 serial and IEEE-488 parallel messages. Each source of such data shall use fixed word positions in the host format. This section does not apply to secondary PCM formats which are to be embedded as described in paragraph 4.5. Merger shall comply with subparagraph 4.2.2 and the following conventions.

- 4.8.1 <u>PCM Data Word Format</u>. Figure 4-5 illustrates the host PCM format word containing a merged asynchronous data word and associated overhead which is referred to as an "asynchronous word structure." The data may be inserted in any length PCM word that will accommodate the required bits. Asynchronous data shall not be placed in fragmented words. Multiple host PCM format words, if used, shall be contiguous.
- 4.8.2 <u>Insertion Process</u>. The asynchronous word structure shall contain the information from the asynchronous message partitioned into two fields, data and overhead, as shown in figure 4-5. The asynchronous message is inserted into the asynchronous word structure with the following bit orientations. The most significant data bit (MSB) through least significant data bit (LSB) and parity (if used) of the message are denoted as D1 (MSB) through Di and will be inserted into structure bits B1 (MSB) through Bi. The next two structure bits, B(i+1) and B(i+2) are reserved for the stale and overflow flags generated by the host encoder. All remaining overhead (message and host encoder generated) D(i+3) through Dn (LSB), will be inserted into structure bits B(i+3) through Bn (LSB).
- 4.8.2.1 <u>Transmission Overhead</u>. All transmission overhead not required for data reconstruction shall be removed.
- 4.8.2.2 <u>Parity Bit</u>. Transmission of a parity bit is optional. If it is transmitted, it shall be at the end of the data field (see figure 4-5) adjacent to the LSB of the data.
- 4.8.2.3 <u>Data Bits</u>. The data bits shall be inserted into the PCM word with the most significant bit of the asynchronous data aligned with the most significant bit of the PCM word.

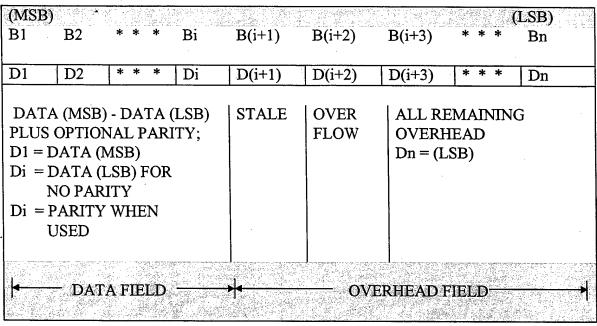


Figure 4-5. Asynchronous word structure.

4.8.2.4 Stale Data Bit. A "stale data bit" flag shall be generated each time a new data value is inserted into the PCM stream. The flag shall be transmitted with the associated data. The flag bit shall be placed in the next less significant bit location following the LSB of the data. If new data is not ready for transmission by the time the PCM word must be sent again, either the old data or alternating one/zero fill shall be sent and the flag set. Stale data shall be indicated by a binary "one" (see figure 4-6).

STALE BIT	OVERFLOW BIT	
0	. 0	FRESH DATA
0	1	DATA OVERFLOW
1	0	STALE DATA
1.	1	USER DEFINED

Figure 4-6. Overhead truth table.

- 4.8.2.5 Overflow Bit. An "overflow bit" flag shall be generated to indicate an abnormal condition in which data may be lost. The overflow bit shall be placed in the next less significant data bit location following the stale bit flag. An overflow bit at a binary "one" indicates that a data discontinuity exists between the current data word and the previous data word (see figure 4-6).
- 4.8.2.6 <u>Insertion Rate</u>. The asynchronous word structure shall be inserted into the host PCM word at a rate to avoid data loss in the PCM stream.

CHAPTER 5

DIGITIZED AUDIO TELEMETRY STANDARD

5.1 General

This chapter defines Continuous Variable Slope Delta (CVSD) modulation as the standard for digitizing audio and addresses the method of inserting CVSD encoded audio into a PCM stream. Additional information and recommendations are provided in appendix F, Continuous Variable Slope Delta Modulation. Appendix F was extracted from the applicable sections of MIL-STD-188-113.

5.2 Definitions

For the purpose of this standard, the following definitions apply.

- 5.2.1 <u>Band-Limited Audio</u>. An audio signal (typically consisting of voice, tones, and sounds) that is limited to a subset of the audio spectrum. For most aircraft audio applications, the spectrum between 100 and 2300 hertz is adequate.
- 5.2.2 <u>Continuous Variable Slope Delta Modulation</u>. The CVSD modulation is a method of digitizing a band-limited audio signal. The CVSD modulator is, in essence, a 1-bit analog-to-digital converter. The output of this 1-bit encoder is a serial bit stream, where each bit represents an incremental increase or decrease in signal amplitude and is determined as a function of recent sample history.

5.3 Signal Source

The signal to be encoded shall be a band-limited audio signal. The source of this signal may be varied. Some examples are microphones, communication systems, and tones from warning systems. This standard applies to <u>audio signals only</u>.

5.4 Encoding/Decoding Technique

The technique to encode and decode the band-limited audio signal is Continuous Variable Slope Delta (CVSD) modulation. This technique is to be implemented in accordance with appendix F.

A CVSD converter consists of an encoder-decoder pair. The decoder is connected in a feedback path. The encoder receives a band-limited audio signal and compares it to the analog output of the decoder. The result of the comparison is a serial string of "ones" and "zeros." Each bit indicates that the band-limited audio sample's amplitude is above or below the decoded signal. When a run of three identical bits is encountered, the slope of the generated analog approximation is increased in its respective direction

until the identical string of bits is broken. The CVSD decoder performs the inverse operation of the encoder and regenerates the audio signal.

5.5 CVSD Encoder Output Bit Rate (CVSD Bit Rate)

The CVSD bit rate for encoding the band-limited audio signal is a function of the desired audio quality and the PCM format characteristics. The minimum and maximum CVSD bit rates will not be specified.

NOTE A qualitative test of CVSD with a tactical aircraft intercom system (ICS) yielded the following results:

(1) intelligible, robotic sounding audio at 12 kilobits/second; (2) good quality audio at 16 kilobits/second; and (3) audio quality did not significantly improve as the bit rate was increased above 32 kilobits/second.

Appendix F contains performance criteria for the CVSD encoder and decoder when operated at 16 or 32 kilobits/second.

5.6 CVSD Word Structure

The digitized audio signal from the CVSD encoder's serial output shall be inserted into the PCM stream as shown in figure 5-1. The most significant bit (MSB) shall be the most stale sample (first in). The least significant bit (LSB) shall be the most recent sample (last in).

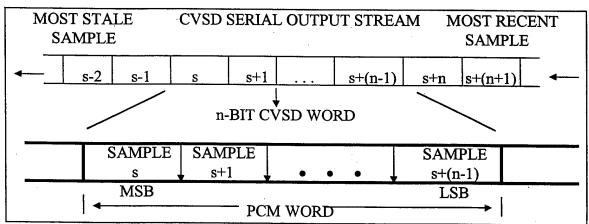


Figure 5-1. Insertion of CVSD encoded audio into a PCM stream.

5.7 CVSD Word Sample Rate

The CVSD word sample rate is dependent on the minimum desired CVSD bit rate, the PCM word length, and the PCM word sample rate. Once the CVSD word sample rate is determined, the actual CVSD bit rate can be calculated. The decoder must be run at the same CVSD bit rate as the encoder.



Because of the nature of CVSD encoding, over and under sampling of the CVSD output will have unpredictable results.



To simplify the reconstruction of the audio signal and minimize all encoding/decoding delays, it is STRONGLY recommended that the digitized audio words be inserted in the PCM stream at evenly spaced intervals.

5.8 CVSD Bit Rate Determination

The following discussion provides a procedure for determining the CVSD bit rate based on the desired minimum CVSD bit rate and information given in the host PCM format. Note that this procedure assumes the CVSD words are inserted in a class I PCM format with constant word widths and are not subcommutated. The CVSD bit rate can be obtained by multiplying the minor frame rate by the number of times the CVSD words appear in the minor frame by the word width used for the CVSD words in the minor frame. This relationship is expressed in equation (5-1).

CVSD BIT RATE = MINOR FRAME RATE • #CVSD WORDS PER MINOR FRAME • WORD WIDTH (5-1)

Knowing the details on the host PCM format, equation (5-1) contains two unknowns: CVSD BIT RATE and #CVSD WORDS PER MINOR FRAME. One of these unknowns must be chosen by the user, then the other one can be calculated. The recommended procedure is to choose the <u>desired</u> (target value) CVSD bit rate and solve equation (5-1) for #CVSD WORDS PER MINOR FRAME. This relationship is expressed in equation (5-2).

#CVSD WORDS PER MINOR FRAME $_{\text{calculated}} = \frac{\text{DESIRED CVSD BIT RATE}}{\text{MINOR FRAME RATE } \bullet \text{WORD WIDTH}}$ (5-2)

Next, round up (if required) the result of equation (5-2) to the nearest integer. To satisfy the evenly spaced recommendation, round up (if required) to the nearest integer that divides evenly into the number of PCM words per minor frame.

Finally, for either case, substitute the result of equation (5-2) back into equation (5-1) to determine the <u>actual CVSD</u> bit rate. To illustrate this procedure, consider the following numerical example for determining the CVSD bit rate. An existing PCM format has the following characteristics:

Bit rate = 192 000 bits/second
Word width = 12 bits/word
Minor frame rate = 100 frames/second

·Words per minor frame = 160 words/minor frame

To insert a serial CVSD bit stream with a desired (target value), CVSD bit rate of 16 000 bits/second will require the following procedure. Based on the information given, use equation (5-2) to calculate the #CVSD WORDS PER MINOR FRAME.

#CVSD WORDS PER MINOR FRAME $_{CALCULATED} = \frac{DESIRED CVSD BIT RATE}{MINOR FRAME RATE • WORD WIDTH}$ #CVSD WORDS PER MINOR FRAME $_{CALCULATED} = \frac{16\ 000\ (bits/sec)}{100\ (frames/sec) • 12\ (bits/word)}$ #CVSD WORDS PER MINOR FRAME $_{CALCULATED} = 13.\overline{3}\ (words/frame)$

Rounding up the #CVSD WORDS PER MINOR FRAME to the nearest integer yields 14. In this example, there are 160 PCM words in the minor frame. If the user needs to satisfy the evenly spaced criteria, then by inspection, the #CVSD WORDS PER MINOR FRAME will be rounded up to 16. For comparison, both cases will be substituted into equation (5-1) to yield the <u>actual CVSD</u> bit rate.

CASE 1: (unevenly spaced CVSD samples, NOT RECOMMENDED)

#CVSD WORDS PER MINOR FRAME CALCULATED = 14 (words/frame)

CVSD BIT RATE = MINOR FRAME RATE • #CVSD WORDS PER MINOR FRAME • WORD WIDTH

CVSD BIT RATE ACTUAL = 100 (frames/sec) • 14 (words/frame) • 12 (bits/word)

CVSD BIT RATE $_{ACTUAL} = 16\,800 \,(bits/sec)$

CASE 2: (evenly spaced samples, RECOMMENDED)

#CVSD WORDS PER MINOR FRAME $_{CALCULATED} = 16 (words/frame)$

CVSD BIT RATE = MINOR FRAME RATE • #CVSD WORDS PER MINOR FRAME • WORD WIDTH

CVSD BIT RATE $_{ACTUAL} = 100 (frames/sec) \cdot 16 (words/frame) \cdot 12 (bits/word)$

CVSD BIT RATE $_{ACTUAL} = 19200$ (bits/sec)

CHAPTER 6

MAGNETIC TAPE RECORDER AND REPRODUCER STANDARDS

6.1 Introduction

These standards define terminology for longitudinal fixed-head recorder and reproducer systems and establish the recorder and reproducer configuration required to ensure crossplay compatibility between tapes recorded at one facility and reproduced at another. Standards for 19 millimeter digital cassette helical scan and 1/2 inch digital cassette (S-VHS) helical scan recording systems are also included along with the associated multiplexer/demultiplexer systems. Acceptable performance levels and a minimum of restrictions consistent with compatibility in interchange transactions are delineated. While the standards may serve as a guide in the procurement of magnetic tape recording equipment, they are not intended to be employed as substitutes for purchase specifications. Other standards have been prepared by the American National Standards Institute (ANSI) and the International Standards Organization (see paragraph 1.0, appendix D).

Wherever feasible, quantitative performance levels are given which must be met or exceeded to comply with these standards. Standard test methods and measurement procedures shall be used to determine such quantities, including those contained in volume III of RCC document 118, <u>Test Methods for Recorder/Reproducer Systems and Magnetic Tape</u>.

United States (U.S.) engineering units are the original dimension in these standards. Conversions from U.S. engineering units (similar to British Imperial Units) to Systeme International d' Unites (SI) units have been done according to ANSI Z210.1-1976 (and International Standards Organization 370) Method A, except as noted. Standards applying to magnetic tapes are contained in chapter 7 of this document.

6.2 Definitions

- 6.2.1 <u>5/6 Modulation Code</u>. A method of encoding whereby a 5-bit data group is converted to a 6-bit code frame in accordance with a conversion table. Such coding is performed to control the frequency content of the data stream.
- 6.2.2 <u>Basic Dimension</u>. A dimension specified on a drawing as BASIC is a theoretical value used to describe the exact size, shape, or location of a feature. It is used as the basis from which permissible variations are established by tolerances on other dimensions.
- 6.2.3 <u>Bias Signal, High Frequency</u>. A high-frequency sinusoidal signal linearly added to the analog data signal in direct recording to linearize the magnetic recording characteristic.

- 6.2.4 <u>Bi-Phase</u>. A method of representing "one" or "zero" levels in PCM systems where a level change is forced to occur in every bit period. In bi-phase recording, the bi-phase level (split-phase) method is employed.
- 6.2.5 <u>Bit Error</u>. In PCM systems, a bit error has occurred when the expected bit value is not present; for example, a zero is present when a one is expected, or a one is present when a zero is expected.
- 6.2.6 <u>Bit Error Rate</u>. Number of bits in error in a predetermined number of bits transmitted or recorded, for example, 1 in 10⁶ or a BER of 10⁻⁶.
- 6.2.7 <u>Bit Packing Density, Linear</u>. Number of bits recorded per inch or per millimeter of tape length. For serial PCM recording, the number of bits per unit length of a single track.
- 6.2.8 <u>Bit Slip</u>. The increase or decrease in detected bit rate by one or more bits with respect to the actual bit rate.
- 6.2.9 <u>Code Frame</u>. An ordered and contiguous set of bits (symbol) that results as a unit from the process of modulation coding.
- 6.2.10 <u>Code Word Digital Sum (CWDS)</u>. Denotes the digital sum variation of one modulation code frame (symbol).
- 6.2.11 <u>Crossplay</u>. Reproducing a previously recorded tape on a recorder and reproducer system other than that used to record the tape.
- 6.2.12 <u>Crosstalk</u>. Undesired signal energy appearing in a reproducer channel as a result of coupling from other channels.
- 6.2.13 <u>Data Azimuth (Dynamic)</u>. The departure from the head segment gap azimuth angles (static) because of the dynamic interface between the heads and the moving tape.
- 6.2.14 <u>Data Scatter</u>. The distance between two parallel lines (as defined under Gap Scatter) in the plane of the tape, which contains all data transitions recorded simultaneously with the same head at the same instant of time.
- 6.2.15 <u>Data Spacing</u>. For interlaced head systems, the distance on tape between simultaneous events recorded on odd and even heads.
- 6.2.16 <u>Digital Sum Variation (DSV)</u>. Indicates the integral value which is counted from the beginning of the modulation coded waveform, taking a high level as 1 and a low level as -1.

- 6.2.17 <u>Direct Recording (ac Bias Recording)</u>. A magnetic recording technique employing a high-frequency bias signal which is linearly added to the data signal. The composite signal is then used as the driving signal to the record-head segment. The bias signal, whose frequency is well above the highest frequency that can be reproduced by the system, transforms the recording of the data signal so that it is a more nearly linear process.
- 6.2.18 <u>Double-Density Recording</u>. Direct, FM, or PCM recording on magnetic tape at bandwidths equal to those used in wide-band instrumentation recording, but at one-half the wide-band tape speeds specified in IRIG standard 106-80 and earlier telemetry standards. Special record and reproduce heads and high output tapes (see chapter 7) are required for double-density recording.
- 6.2.19 <u>Dropout</u>. An instantaneous decrease in reproduce signal amplitude of a specified amplitude and duration.
- 6.2.20 ECC Code Word. The group of symbols resulting from ECC encoding including the data symbols and the check symbols appended.
- 6.2.21 <u>Edge Margin</u>. The distance between the outside edge of the highest number track and the tape edge (see figure 6-1).
- 6.2.22 Edge Margin Minimum. The minimum value of edge margin.
- 6.2.23 Error Correcting Code (ECC). A mathematical procedure yielding bits used for the detection and correction of errors.
- 6.2.24 <u>FM Recording</u>. Recording on magnetic tape using frequency-modulated record electronics to obtain response from dc to an upper specified frequency. The FM systems forfeit upper bandwidth response of direct record systems to obtain low frequency and dc response not available with direct recording.
- 6.2.25 <u>Flux Transition</u>. A 180-degree change in the flux pattern of a magnetic medium brought about by a reversal of poles within the medium.
- 6.2.26 <u>Flux Transition Density</u>. Number of flux transitions per inch or per millimeter of track length.
- 6.2.27 <u>Flutter</u>. Undesired changes in the frequency of signals during the reproduction of a magnetic tape produced by speed variations of the magnetic tape during recording or reproducing.
- 6.2.28 <u>Gap Azimuth</u>. The angular deviation, in degrees of arc, of the recorded flux transitions on a track from the line normal to the track center line.

- 6.2.29 <u>Gap Length (Physical)</u>. The dimension between leading and trailing edges of a record or reproduce head-segment gap measured along a line perpendicular to the leading and trailing edges of the gap.
- 6.2.30 <u>Gap Scatter (Record Head)</u>. The distance between two parallel lines is defined in the following subparagraphs.
- 6.2.30.1 The two lines pass through the geometric centers of the trailing edges of the two outermost head segment gaps within a record head. The geometric centers of the other head segment gap trailing edges lie between the two parallel lines.
- 6.2.30.2 The two parallel lines lie in the plane of the tape and are perpendicular to the head reference plane (see figure 6-3).
- 6.2.31 <u>Gap Scatter (Reproduce Head)</u>. Defined the same as for record-head gap scatter except that the reference points for reproduce heads are the geometric centers of the center lines of the head segment gaps (see figure 6-3).
- 6.2.32 <u>Guard Band</u>. The unrecorded space between two adjacent recorded tracks on the magnetic tape.
- 6.2.33 Head (Record or Reproduce). A group of individual head segments mounted in a stack.
- 6.2.34 <u>Head Designation</u>. For interlaced heads, the first head of a record or reproduce pair over which the tape passes in the forward direction contains odd-numbered head segments and is the odd head. The second head containing even-numbered head segments is the even head. For noninterlaced heads, that is, in-line heads, both odd- and even-numbered head segments are contained within a single head.
- 6.2.35 <u>Heads, In-Line</u>. A single record head and a single reproduce head are employed. Odd and even record-head segment gaps are in-line in the record head. Odd and even reproduce-head segment gaps are in-line in the reproduce head.
- 6.2.36 <u>Head Reference Plane</u>. The plane, which may be imaginary, is parallel to the reference edge of the tape and perpendicular to the plane of the tape. For purposes of this definition, the tape shall be considered as perfect (see figures 6-2 and 6-3).
- 6.2.37 <u>Head Segment, Record or Reproduce</u>. A single transducer that records or reproduces one track (see figure 6-3).
- 6.2.38 <u>Head Segment Gap Azimuth (Record or Reproduce Heads)</u>. The angle formed in the plane of the tape between a line perpendicular to the head reference plane and a line parallel to the trailing edge of the record-head segment gap or parallel to the center line of the reproduce-head segment gap.

- 6.2.39 <u>Head Segment Gap Azimuth Scatter</u>. The angular deviations of the head segment gap azimuth angles within a head.
- 6.2.40 <u>Head Segment Numbering</u>. Numbering of a head segment corresponds to the track number on the magnetic tape on which that head segment normally operates. For interlaced heads, the odd head of a pair contains all odd-numbered segments, while the even head will contain all even-numbered segments (see figure 6-2). In-line heads will contain odd and even segments in the same head stack.
- 6.2.41 Head Spacing. For interlaced head systems, the distance between odd and even heads.
- 6.2.42 <u>Head Tilt</u>. The angle between the plane tangent to the front surface of the head at the center line of the head segment gaps and a line perpendicular to the head reference plane (see figure 6-3).
- 6.2.43 <u>Heads, Interlaced</u>. Two record heads and two reproduce heads are employed. Head segments for alternate tracks are in alternate heads.
- 6.2.44 <u>Helical Track</u>. A diagonally positioned area on the tape along which a series of magnetic transitions is recorded.
- 6.2.45 <u>High-Density Digital Recording</u>. Recording of digital data on a magnetic medium resulting in a flux transition density in excess of 590 transitions per millimeter (15 000 transitions per inch) per track.
- 6.2.46 <u>Individual Track Data Azimuth Difference</u>. Angular deviation of the data azimuth of an individual odd or even recorded track from the data azimuth of other odd or even tracks. The difficulty in making direct optical angular measurements requires this error to be expressed as a loss of signal amplitude experienced when the tape is reproduced with an ideal reproducing head, whose gap is aligned to coincide with the data azimuth of all tracks in one head as compared to the azimuth which produces maximum signal for an individual track (see figure 6-3).
- 6.2.47 <u>Interleaving</u>. The systematic reordering of data so that originally adjacent ECC code word symbols are separated, thus reducing the effect of burst errors on the error correcting capability.
- 6.2.48 Non-Return-to-Zero Level. A binary method of representation for PCM signals where one is represented by one level, and zero is defined as the other level in a bi-level system.
- 6.2.49 <u>Physical Recording Density</u>. The number of recorded flux transitions per unit length of track, for example, flux transitions per millimeter (ftpmm).
- 6.2.50 Principal Block. Denotes a group of helical tracks recorded on the tape in one complete rotation of the scanner.

- 6.2.51 <u>Principal Block Number (PBN)</u>. A unique number assigned to and recorded in each principal block.
- 6.2.52 <u>Record Level Set Frequency</u>. Frequency of a sinusoidal signal used to establish the standard record level in direct-record systems. Normally, 10 percent of the upper band edge (UBE) frequency.
- 6.2.53 <u>Reference Tape Edge</u>. When viewing a magnetic tape from the oxide surface side with the earlier recorded portion to the observer's right, the reference edge is the top edge of the tape (see figure 6-1).
- 6.2.54 <u>Reference Track Location</u>. Location of the center line of track number 1 from the reference edge of tape.
- 6.2.55 <u>Scanner</u>. The rotating assembly housing the helical heads around which the tape is applied thereby accomplishing the recording of helical tracks on the tape.
- 6.2.56 <u>Standard Record Level</u>. For a magnetic tape recorder meeting IRIG standards and operating in the direct record mode, the input signal level produces 1 percent third harmonic distortion of the record level set frequency.
- 6.2.57 <u>Tape Skew</u>. Motion of a magnetic tape past a head such that a line perpendicular to the tape reference edge has an angular displacement (static or dynamic) from the head gap center lines.
- 6.2.58 <u>Tape Speed, Absolute</u>. The tape speed during recording and reproducing. The peripheral velocity of the capstan minus any tape slip, regardless of tape tension and environment.
- 6.2.59 <u>Tape Speed, Effective</u>. The tape speed modified by the effects on tape of operating conditions such as tension, tape materials, thickness, temperature, and humidity. The effective tape speed should be equal to the selected speed of the recorder, for example, 1524 mm/s (60 ips), 3048 mm/s (120 ips), regardless of operating conditions.
- 6.2.60 <u>Tape Speed Errors</u>. Errors are the departures of the effective speed from the selected tape speed.
- 6.2.61 <u>Track Angle</u>. The angular deviation, in degrees of arc, of the centerline of the recorded helical track from the tape reference edge.
- 6.2.62 <u>Track Location</u>. Location of the nth track centerline from the reference track centerline.

- 6.2.63 <u>Track Numbering</u>. The reference track is designated as track number 1. Tracks are numbered consecutively from the reference track downward when viewing the oxide surface of the tape with the earlier recorded portion of the tape to the observer's right (see figure 6-1).
- 6.2.64 <u>Track Spacing</u>. Distance between adjacent track centerlines on a magnetic tape (see figure 6-1).
- 6.2.65 <u>Track Width</u>. The physical width of the common interface of the record-head segment at the gaps. This definition does not include the effects of fringing fields, which will tend to increase the recorded track width by a small amount.
- 6.2.66 Volume Label. A group of bits used to provide an identifying code for a tape cartridge.

6.3 General Consideration for Longitudinal Recording

Standard recording techniques, tape speeds, and tape configurations are required to provide maximum interchange of recorded telemetry magnetic tapes between the test ranges. Any one of the following methods of information storage or any compatible combination may be used simultaneously: direct recording, predetection recording, FM recording, or PCM recording. Double-density recording may be used when the length of recording time is critical; however, it must be used realizing that performance parameters such as signal-to-noise ratio, crosstalk, and dropouts may be degraded (see paragraph 2.0, appendix D).

- 6.3.1 <u>Tape Speeds</u>. The standard tape speeds for instrumentation magnetic tape recorders are shown in table 6-1.
- 6.3.2 <u>Tape Width</u>. The standard nominal tape width is 25.4 mm (1 in.) (see table 7-1, Tape Dimensions).
- 6.3.3 <u>Record and Reproduce Bandwidths</u>. For the purpose of these standards, two system bandwidth classes are designated: wide band and double density (see table 6-1). Interchange of tapes between the bandwidth classes is **NOT** recommended.

6.4 Recorded Tape Format

The parameters related to recorded tape format and record and reproduce head configurations determine compatibility between systems that are vital to interchangeability (crossplay) of recorded magnetic tapes. Refer to the definitions in paragraph 6.2, figures 6-1 through 6-4 and tables 6-2 through 6-4. See appendix D for configurations not included in these standards.

6.4.1 Track Width and Spacing. Refer to figure 6-1 and tables 6-2 through 6-4.

TABLE 6-1. RECORD AND REPRODUCE PARAMETERS

Tape Speed mm/s (ips)	±3 dB Reproduce Passband <u>kHz</u> ¹	Direct Record Bias Set Frequency (UBE) kHz ²	Direct Record Level Set Frequency (10% of UBE) kHz
WIDE BAND		(OVERBIAS 2dB)	
6096.0 (240) 3048.0 (120) 1524.0 (60) 762.0 (30) 381.0 (15) 190.5 (7-1/2) 95.2 (3-3/4) 47.6 (1-7/8)	0.8-4000 0.4-2000 0.4-1000 0.4- 500 0.4- 250 0.4- 125 0.4- 62.5 0.4- 31.25	4000 2000 1000 500 250 125 62.5 31.25	400 200 100 50 25 12.5 6.25 3.12
DOUBLE DENSI	ГУ	(OVERBIAS 2 dB)	
3048.0 (120) 1524.0 (60) 762.0 (30) 381.0 (15) 190.0 (7-1/2) 95.2 (3-3/4)		4000 2000 1000 500 250 125	400 200 100 50 25 12.5

¹Passband response reference is the output amplitude of a sinusoidal signal at the record level set frequency recorded at standard record level. The record level set frequency is 10 percent of the upper band edge frequency (0.1 UBE)

²When setting record bias level, a UBE frequency input signal is employed. The signal input level is set 5 to 6 dB below standard record level to avoid saturation effects which could result in erroneous bias level settings. The record bias current is adjusted for maximum reproduce output level and then increased until the output level decreases by the number of dB indicated in the table (see paragraph 4.1.3.3 of volume III, RCC document 118).

TABLE 6-2. DIMENSIONS – RECORDED TAPE FORMAT, 14 TRACKS
INTERLACED ON 25.4 mm (1 in.) WIDE TAPE
(REFER TO FIGURE 6-1.)

Millin	neters	Inches	
Maximum Minin	num		
1.397	1.143	0.050 ± 0.005	
1.7	78	0.070	
38.125	38.075	1.500 ± 0.001	
38.151	38.049	1.500 ± 0.002	
0.2	279	1.011	
	•		
1.168	1.067	0.044 ± 0.002	
0.051	-0.051	±0.002	
	Maximum Minin 1.397 1.7 38.125 38.151 0.2	1.778 38.125 38.075 38.151 38.049 0.279 1.168 1.067	Maximum Minimum 1.397 1.143 0.050 ± 0.005 1.778 0.070 38.125 38.075 1.500 ± 0.001 38.151 38.049 1.500 ± 0.002 0.279 1.011 1.168 1.067 0.044 ± 0.002

Location of nth track

Track N	<u>lumber</u>	Millime	e <u>ters</u>	<u>Inches</u>	ļ
		Maximum	<u>Minimum</u>		
1 (Refe	rence)	0.000	0.000	0.000	
2	1.829	1.727	0.070		
3	3.607	3.505	0.140		
4	5.385	5.283	0.210		
5	7.163	7.061	0.280		
6	8.941	8.839	0.350		
7	10.719	10.617	0.420		
. 8	12.497	12.395	0.490		
9	14.275	14.173	0.560		
10		16.053	15.951	0.630	
11		17.831	17.729	0.700	
12		19.609	19.507	0.770	
13		21.387	21.285	0.840	
14		23.165	23.063	0.910	-

TABLE 6-3. DIMENSIONS – RECORDED TAPE FORMAT, 14 TRACKS IN-LINE ON 25.4 mm (1 in.) WIDE TAPE (REFER TO FIGURE 6-1.)

Parameters		Millin	Millimeters					
		Maximum Minim	num					
Track Width	ı	0.660	0.610	0.25 ± 0.001				
Track Spacin	ng	1.7	78	0.070				
Head Spacin	ıg	N/	A	N/A				
Edge Margin	n, Minimum ¹	1.118	0.044					
Reference T	rack							
Location	n	0.698	0.622	0.0260 ± 0.0015				
Track Locat	ion							
Tolerand	ce	0.038	-0.038	± 0.0015				
			·					
			Location of nth track					
Track N	<u>Number</u>	<u>Millime</u>		<u>Inches</u>				
		<u>Maximum</u>	<u>Minimum</u>					
1 (Refe	•	0.000	0.000	0.000				
2	1.816	1.740	0.070					
3	3.594	3.518	0.140	•				
4	5.372	5.296	0.210					
5	7.150	7.074	0.280					
. 6	8.928	8.852	0.350					
7	10.706	10.630	0.420					
8	12.484	12.408	0.490					
9	14.262	14.186	0.560					
10		16.040	15.964	0.630				
11		17.818	17.818 17.742					
12		19.596	19.520 0.776					
13		21.374	21.374 21.298 0.8					
14	•	23.152	23.076	0.910				
1								

¹Track location and spacing are the same as the odd tracks of the 28-track interlaced format (see table 6-4). Edge margin for track 1 is only 0.229 mm (0.009 in.).

TABLE 6-4. DIMENSIONS – RECORDED TAPE FORMAT, 28 TRACKS INTERLACED ON 25.4 mm (1 in.) WIDE TAPE (REFER TO FIGURE 6-1).

Parameters		Millimeters		Inches
	Maximum	Minimum		
Track Width	0.660		0.610	0.025 ± 0.001
Track Spacing		0.889		0.035
Head Spacing				
Fixed Heads	38.125		38.075	1.500 ± 0.001
Adjustable Heads	38.151		38.049	1.500 ± 0.002
Edge Margin, Minimum		0.229	-	1.009
Reference Track				
Location	0.699		0.622	0.0260 ± 0.0015
Track Location				•
Tolerance	0.038		-0.038	± 0.0015

Location of nth track

Track N	umber	Millime	eters eters	<u>Inches</u>	
		Maximum	Minimum		
1 (Refe	rence)	0.000	0.000	0.000	
•	0.927	0.851	0.035		
2 3	1.816	1.740	0.070		
4	2.705	2.629	0.105		
5	3.594	3.518	0.140		
6	4.483	4.407	0.175		
7	5.372	5.296	0.210		
8	6.261	6.185	0.245		
9	7.150	7.074	0.280	4.407 0.175	
10		8.039	7.963	0.315	
11		8.928	8.852	0.350	
12		9.817	9.741	0.385	
13		10.706	10.630	0.420	
14		11.595	11.519	0.455	
15		12.484	12.408	0.490	
16		13.373	13.297	0.525	
17		14.262	14.186	0.560	
18		15.151	15.075	0.595	
19		16.040	15.964	0.630	
20		16.929	16.853	0.665	
21	•	17.818	17.742	0.700	
22		18.707	18.631	0.735	
23		19.596	19.520	0.770	
24		20.485	20.409	0.805	
25		21.374	21.298	0.840	
26		22.263	22.187	0.875	
27		23.152	23.076	0.910	
28		24.041	23.965	0.945	

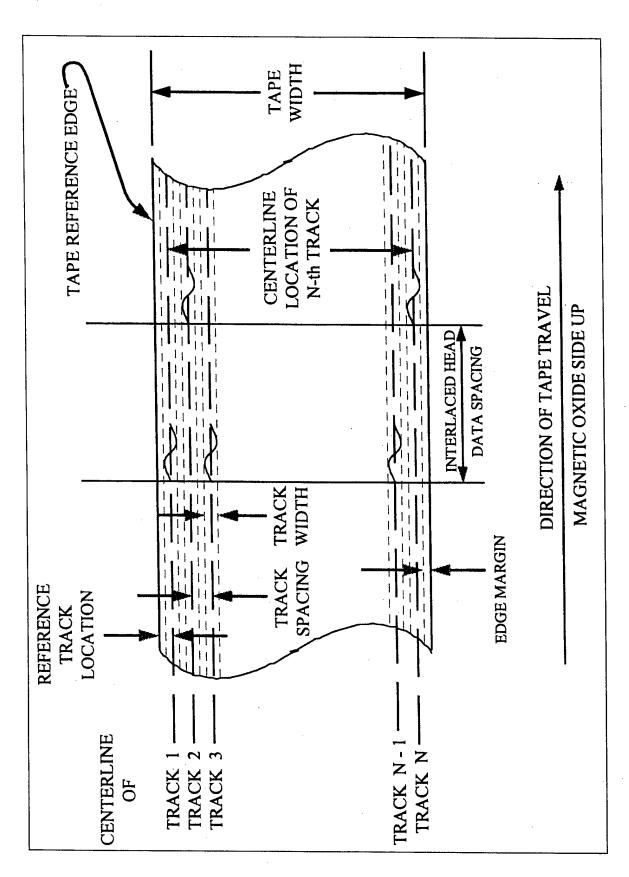


Figure 6-1. Recorded tape format.

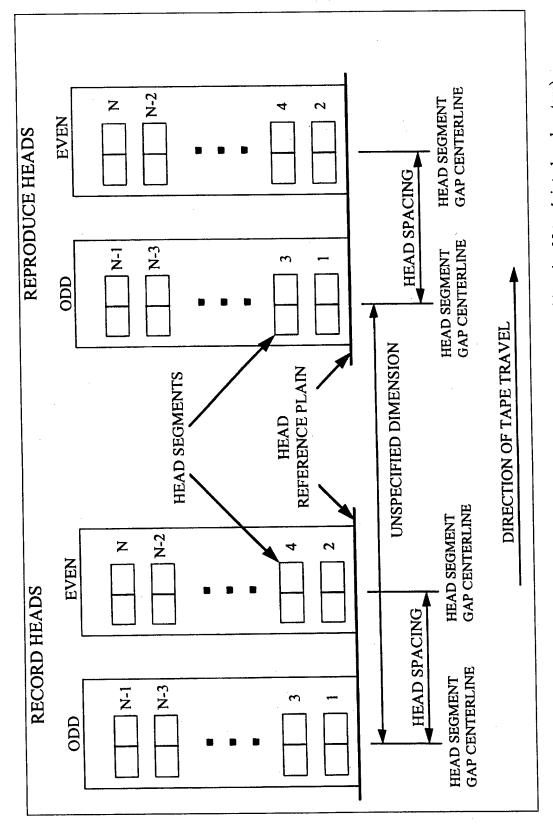


Figure 6-2. Record and reproduce head and head segment identification and location N-track interlaced system)

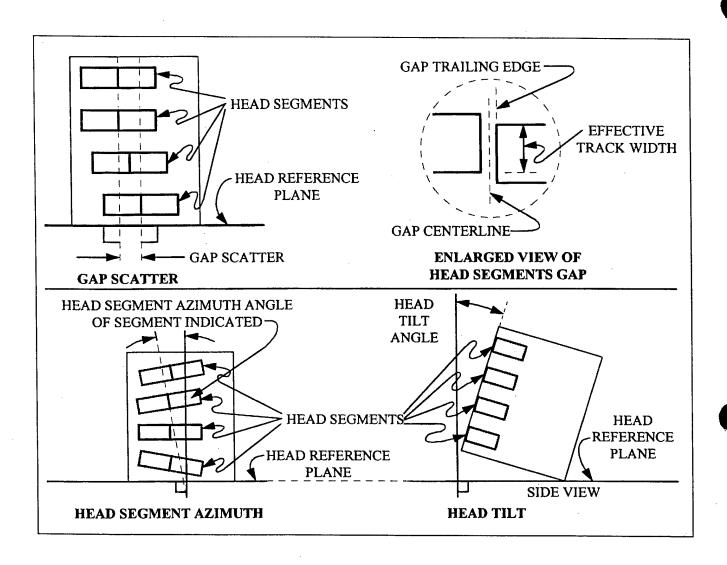


Figure 6-3. Head and head segment mechanical parameters.

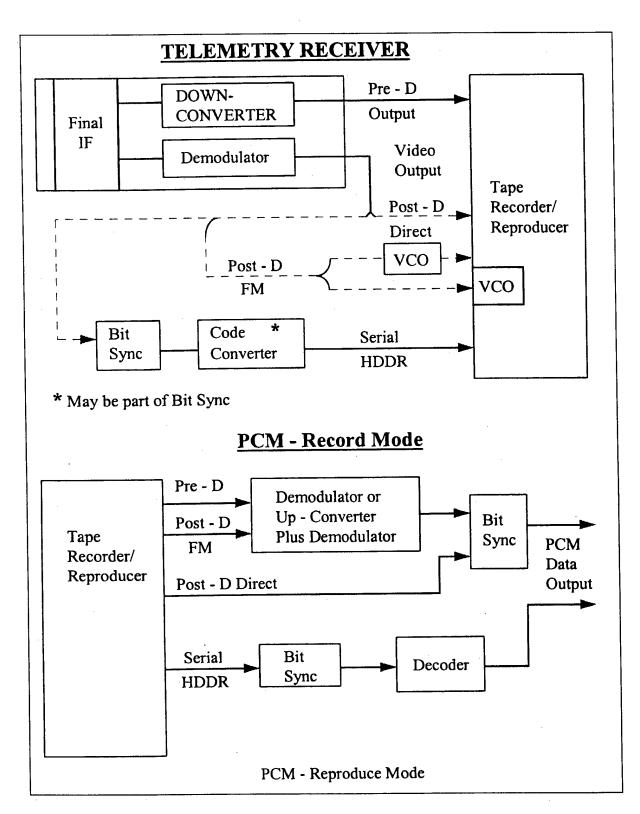


Figure 6-4. PCM record and reproduce configuration.

- 6.4.2 <u>Track Numbering</u>. The tracks on a tape are numbered consecutively from track 1 through track n with track 1 located nearest the tape reference edge as shown in figure 6-1.
- 6.4.3 <u>Data Spacing</u>. For interlaced formats, the spacing on tape between simultaneous events on odd and even tracks is nominally 38.1 mm (1.5 in.) (see paragraph 6.4.4.1).
- 6.4.4 <u>Head Placement</u>. The standard technique for wide band and 28-track double density is to interlace the heads, both the record and the reproduce, and to provide alternate tracks in separate heads. Thus, to record on all tracks of a standard width tape, two interlaced record heads are used; to reproduce all tracks of a standard width tape, two interlaced reproduce heads are used. For 14-track double density, the standard technique uses one in-line record head and one in-line reproduce head.
- 6.4.4.1 <u>Head Placement, Interlaced</u>. Two heads comprise the record-head pair or the reproduce-head pair. Mounting of either head pair is done in such a manner that the center lines drawn through the head gaps are parallel and spaced $38.10 \text{ mm} \pm 0.05$ (1.500 in. ± 0.002) apart, as shown in tables 6-2 and 6-4, for systems that include head azimuth adjustment. The dimension between gap centerlines includes the maximum azimuth adjustment required to meet system performance requirements. For systems with fixed heads, that is, heads without an azimuth adjustment, the spacing between gap center lines shall be $38.10 \text{ mm} \pm 0.03$ (1.500 in. ± 0.001) (see figure 6-2).
- 6.4.4.2 <u>Head Identification and Location</u>. A head segment is numbered to correspond to the track number that segment records or reproduces. Tracks 1, 3, 5, . . . are referred to as the "odd" head segments. Tracks 2, 4, 6, . . . are referred to as the even head segments. For interlaced heads, the head containing the odd numbered segments (odd head) is the first head in a pair of heads (record or reproduce) over which an element of tape passes when moving in the forward record or reproduce direction (see figure 6-2).
- 6.4.4.3 <u>In-Line Head Placement</u>. An in-line head shall occupy the position of head number 1 in an interlaced system.
- 6.4.4.4 <u>Head Segment Location</u>. Any head segment within a head shall be located within ± 0.05 mm (± 0.002 in.) of the nominal (dimension from table without tolerances) position required to match the track location as shown in figure 6-1 and tables 6-2 through 6-4.

6.5 Head and Head Segment Mechanical Parameters

The following subparagraphs describe the mechanical parameters of the head and head segments.

6.5.1 <u>Gap Scatter</u>. Gap scatter shall be 0.005 mm (0.0002 in.) or less for 25.4 mm (1 in.) tape (see figure 6-3 and subparagraph 4.1, appendix D).

- 6.5.2 <u>Head Segment Gap Azimuth Alignment</u>. The head segment gap azimuth shall be perpendicular to the head reference plane to within ± 0.29 mrad (± 1 minute of arc).
- 6.5.3 <u>Head Tilt</u>. The plane tangent to the front surface of the head at the center line of the head segment gaps shall be perpendicular to the head reference plane within ± 0.29 mrad (± 1 minute of arc) for wide band and double density recorders (see figure 6-3).
- 6.5.4 <u>Record-Head Segment Gap Parameters</u>. The parameters for the length and azimuth alignment are described in the following subparagraphs.
- 6.5.4.1 Record-Head Segment Gap Length. The record gap length (the perpendicular dimension from the leading edge to the trailing edge of the gap) shall be 2.16 μ m \pm 0.5 (85 microinch \pm 20) for wide band recorders and 0.89 μ m \pm 0.12 (35 microinch \pm 5) for double density recorders (see figure 6-3 and paragraph 6.0, appendix D).
- 6.5.4.2 <u>Record-Head Stack Gap Azimuth Alignment</u>. The record-head stack azimuth shall be perpendicular to the head reference surface to within ±0.29 mrad (±1 minute of arc). See paragraph 1.2, volume III, RCC document 118 for suggested test procedure.
- 6.5.4.3 <u>Reproduce-Head Segment Gap Azimuth Alignment</u>. The reproduce-head segment azimuth alignment shall match that of the record-head segment as indicated by reproducing an UBE frequency signal on a selected track and setting the reproduce head azimuth for the maximum output. At this azimuth setting, the output of any other track in the reproduce head shall be within 2 dB of the output at its own optimum azimuth setting (see paragraph 1.3, volume III, RCC document 118).

6.6 Head Polarity

See chapter 1, volume III, RCC document 118 and subparagraph 4.2, appendix D of this document for additional information.

- 6.6.1 <u>Record-Head Segment</u>. Each record-head winding shall be connected to its respective amplifier in such a manner that a positive going pulse referenced to system ground at the record amplifier input will result in the generation of a specific magnetic pattern on a segment of tape passing the record head in the normal direction of tape motion. The resulting magnetic pattern shall consist of a polarity sequence of south-north-north-south.
- 6.6.2 <u>Reproduce-Head Segment</u>. Each reproduce-head segment winding shall be connected to its respective amplifier in such a manner that an area of a tape track exhibiting a south-north-north-south magnetic pattern will produce a positive going pulse with respect to system ground at the output of the reproducer amplifier.

6.7 Magnetic Tape and Reel Characteristics

Magnetic tape and reel characteristics are specified in chapter 7. It is recommended that all recorder and reproducer systems at a particular range be calibrated for operational use against a reference tape of the type used by the range for each bandwidth class of recorder and reproducer system. Additional supplementary procurement specifications may be required to meet a particular operational requirement of the ranges.

- 6.7.1 <u>Tape Width</u>. The standard nominal tape width is 25.4 mm (1 in.) (see table 7-1, Tape Dimensions).
- 6.7.2 <u>Tape Guiding</u>. The tape guidance system restricts the tape angular motion to ± 0.15 mrad (± 30 seconds of arc) as measured by the interchannel time displacement error (ITDE) of outer tracks on the same head stack. Make sure the guidance system does not damage the tape.

6.8 <u>Direct Record and Reproduce Systems</u>

Direct recording is a method of recording information signals on magnetic tape using high-frequency ac bias recording (see paragraph 6.2, Definitions). Two classes of systems, wide band and double density, are included in these standards (see table 6-1).

- 6.8.1 <u>Direct Record Parameters</u>. The following subparagraphs describe the direct record parameters.
- 6.8.1.1 The input impedance for wide band and double density recorders shall be 75 ohms nominal across the specified band.
- 6.8.1.2 Input gain adjustment shall be provided to permit sine-wave signals of 0.35 to 3.5 V rms to be adjusted to produce standard record level.
- 6.8.1.3 Ideally, the recorded flux level on tape versus frequency should be constant. To approach this ideal, the record amplifier transfer characteristic is basically a constant current versus frequency with a superimposed compensation characteristic to correct only for loss of recording efficiency with frequency. Results of the test described in paragraph 4.8, volume III, RCC document 118, with the output amplitude at the 2 percent upper band edge (UBE) frequency used as the 0 dB reference, shall be no greater than the following:

Percent of UBE Frequency	dB Difference
10	0.5
50	1.0
80	1.6
100	2.0

- 6.8.1.4 Record bias setting information is contained in table 6-1. The bias frequency shall be greater than 3.5 times the highest direct record frequency for which the recorder and reproducer system is designed (see appendix D).
- 6.8.2 <u>Standard Record Level</u>. The standard record level for direct record systems is the input level of the record level set frequency, which produces an output signal containing 1 percent third harmonic distortion. The conditions necessary to establish the standard record level include appropriate selection of the sinusoidal reference frequency (record level set frequency) as indicated in table 6-1 and proper reproduce amplifier termination as defined in figure 4-2, volume III, RCC document 118. A
- 1 percent third harmonic distortion content is achieved when the level of the third harmonic of the record level set frequency is 40 dB ± 1 below the level of a sinusoidal signal of 30 percent of UBE frequency which is recorded at the standard record level (see paragraph 5.0, appendix D for information regarding standard test and operating practices).
- 6.8.3 Reproduce Parameters. The following subparagraphs describe the reproduce parameters.
- 6.8.3.1 For wide band and double density recorders, the output impedance shall be 75 ohms nominal across the specified passband.
- 6.8.3.2 When reproducing a signal at the record level set frequency (recorded at the standard record level), the output level shall be a minimum of 1 V rms with a third harmonic distortion of 1 percent and a maximum second harmonic distortion of 0.5 percent when measured across a resistive load of 75 ohms. Lack of proper output termination will not cause the reproduce amplifier to oscillate.
- 6.8.4 <u>Tape Speed and Flutter Compensation</u>. The average or long-term tape speed must be the same during record and reproduce to avoid frequency offsets, which may result in erroneous data. To minimize this problem, a reference signal may be applied to the tape during record and the signal used to servo-control the tape speed upon reproduce. However, because servo-control systems have limited correction capabilities and to minimize the amount of equipment required at the ranges, tape speeds and servo-control signals shall conform to the following standards.
- 6.8.4.1 The effective tape speed throughout the reel or any portion of the reel (in absence of tape-derived servo-speed control) shall be within ± 0.2 percent of the standard speed as measured by the procedures described in chapter 2, volume III, RCC document 118.
- 6.8.4.2 Sinusoidal or square wave speed-control signals are recorded on the tape for the purpose of servo-control of tape speed during playback. The operating level for speed-control signals shall be $10 \text{ dB} \pm 5 \text{ below}$ standard record level when mixed with other signals or standard record level when recorded on a separate track.

- 6.8.4.3 The constant-amplitude speed-control signal shall be used on a separate track for optimum servo-speed correction. The speed-control signal may be mixed with other signals if recording requirements so demand and system performance permits. Mixing of the speed-control signal with certain types of signals may degrade system performance for tapes which are to be reproduced on tape transports with low time-base error capstan drive systems (refer to manufacturer). Table 6-5 lists speed-control signal frequencies. The speed-control signal may also be used as a flutter correction signal.
- 6.8.4.4 Signals to be used for discriminator flutter correction systems are listed in tables 3-3 and 6-5. See subparagraph 6.8.4.3 and table 3-3 for restrictions on use of flutter correction signals.

6.9 Timing, Predetection, and Tape Signature Recording

Described in the following subparagraphs are timing signal, predetection, and tape signature recording.

- 6.9.1 <u>Timing Signal Recording</u>. Modulated-carrier, time-code signals (IRIG A, IRIG B and IRIG G) are widely used and other formats are available. When recording IRIG B time-code signals, care must be taken to ensure that low-frequency response to 100 Hz is provided. The direct record, low frequency cutoff of most wide band recorders is 400 to 800 Hz. For these systems, IRIG B time code signals should be recorded on an FM track or on an FM subcarrier. The widest bandwidth subcarrier available should be employed to minimize time delay¹. For double density systems, all time code signals should be recorded on an FM track or an FM subcarrier.
- 6.9.2 <u>Predetection Recording</u>. Predetection signals have been translated in frequency but not demodulated. These signals will be recorded by direct (high frequency bias) recording. Parameters for these signals are in table 6-6.
- 6.9.3 <u>Tape Signature Recording</u>. For data processing using wide band and double-density recorders and reproducers, a tape signature recorded before or after the data, or both before and after the data, provides a method of adjusting the reproducer head azimuth and reproduce equalization. A means is also provided for verifying the proper operation of equipment such as playback receivers and bit synchronizers used to retrieve the recorded data.

¹Timing code formats are found in IRIG standard 200-89, <u>Time Code Formats</u> and IRIG standard 205-87, <u>Parallel Binary and Parallel Binary Coded Decimal Time Code Formats</u>.

TABLE 6-5. CONSTANT-AMPLITUDE SPEED-CONTROL SIGNALS¹

Tape S mm/s	Speed ips		Freque kHz	ncy²	
6096	(240	400	±0.01%	800	±0.01%
3048	(120)	200	±0.01%	400	±0.01%
1524	(60)	100	±0.01%	200	±0.01%
762	(30)	50	±0.01%	100	±0.01%
381	(15)	25	±0.01%	50	±0.01%
190.5	(7-1/2)	12.5	±0.01%	25	±0.01%
95.5	(3-3/4)	6.5	±0.01%	12.5	±0.01%
47.6	(1-7/8)	3.125	±0.01%	6.25	±0.01%



Caution should be used when multiplexing other signals with the speed-control signal. In the vicinity of the frequency of the speed-control signal (fsc ±10 percent), the level of individual extraneous signals including and poise must be 40 dB or more below the level of the speed-control

spurious, harmonics, and noise must be 40 dB or more below the level of the speed-control signal. A better procedure is to leave one octave on either side of the speed-control signal free of other signals.

¹May also serve as discriminator flutter-correction reference signal (see table 3-3).

²Either set of speed-control signals may be used primarily with wideband systems, but only the higher set of frequencies is recommended for double density systems. When interchanging tapes, care should be taken to ensure that the recorded speed-control signal is compatible with the reproduce system's speed-control electronics.

				Predetection (Carrier
	Tape Sp	eed	Center Freque	ency ^{1 2}	
mm/s	(ips)	mm/s	(ips)	kHz	•
Wide I	3and	Double l	Density	A	В
6096	(240)	3048.0	(120)	1800	2400
3048	(120)	1524.0	(60)	900	1200
1524	(60)	762.0	(30)	450.0	600
762	(30)	381.0	(15)	225.0	300
381	(15)	109.5	(7.5)	112.5	150

A pulse code modulation (PCM) signature is recommended where primarily PCM data is recorded. A swept-frequency or white-noise signature may be used for other data such as frequency division multiplexing (FDM) or wide band FM. The procedures for recording and using these signatures are given in paragraph 7.0, appendix D. A recommended preamble/postamble signal for recorder/reproducer alignment is included in paragraph 6.12.

6.10 FM Record Systems

For these FM record systems, the input signal modulates a voltage- controlled oscillator, and the output is delivered to the recording head. High frequency bias may be used but is not required. These standards shall apply.

- 6.10.1 Tape and Reel Characteristics. Paragraph 7.1 and all related subparagraphs shall apply.
- 6.10.2 Tape Speeds and Corresponding FM Carrier Frequencies. See table 6-7
- 6.10.3 FM Record/Reproduce Parameters. See table 6-7. Figure 6-7. ADARIO block format.

¹ The predetection record/playback passband is the carrier center frequency ±66.7 percent.

² Use center frequencies in column B when data bandwidth exceeds the capabilities of those in column A.

RS	•		Response	Band Limits	dB ²	•	- H	#	1#	+1	+	+1	+ 1			±1,-3	±1,-3	±1,-3	±1, -3	±1,-3	±1,-3	±1,-3	±1, -3	
WIDE BAND AND DOUBLE DENSITY FM RECORD PARAMETERS			Modulation	Frequency	kHz		dc to 1.250	dc to 2.500	dc to 5.000	dc to 10.000	dc to 20.000	dc to 40.000	dc to 80.000			dc to 7.810	dc to 15.620	dc to 31.250	dc to 62.500	dc to 125.000	dc to 250.000	dc to 500.000	dc to 1000.000	
SITY FM REC	er	Limits1	Minus	Deviation	kHz		4.050	8.100	16.200	32.400	64.800	129.600	259.200			9.844	19.688	39.375	78.750	157.500	315.000	630.000	1260.000	
OUBLE DEN	Carrier	Deviation Limits ¹	Plus	Deviation	kHz		9.450	18.900	37.800	75.600	151.200	302.400	604.800			18.281	36.562	73.125	146.250	292.500	585.000	1170.000	2340.000	
SAND AND D		Carrier	Center	Frequency	kHz		6.750	13.500	27.000	54,000	108,000	216.000	432.000			14.062	28.125	56.250	112.500	225.000	450.000	000.006	1800.000	ı I
		eed	ins)		nd FM	I	(1-7/8)	(3-3/4)	(7-1/2)	(15)	(30)	96	(120	nd FM	Ш	(1-7/8)	(3-3/4)	(7-1/2)	(15)	(05)	99	(120)	(240)	` ?:·->
TABLE 6-7.		Tane Speed	mm/s (ins)		Wide Band FM	Group	47.6	05.7	190.5	381.0	0.195	1524 0	3048.0	Wide Band FM	Group I	47.6	95.7	190 5	3810	0.192	1524 0	3048.0	0.01.02	``
										-				Density				(7,3/4)	(7-1/2)	(15)	(05)	(05)	(130)	()71)
														Double Density				05.7	1005	201.0	762.0	1524 0	3048.0	70.0

¹Input voltage levels per subparagraph 6.4.1.
²Frequency response referred to 1-kHz output for FM channels 13.5 kHz and above, and 100 Hz for channels below 13.5 kHz.

- 6.10.4 <u>Speed Control and Compensation</u>. Subparagraph 6.8.4 shall apply. Note that a separate track is always required for speed control and flutter compensation signals with a single-carrier FM system.
- 6.10.5 <u>FM Record Parameters</u>. For FM record systems, an input voltage of 1 to 10 V peak-to-peak shall be adjustable to produce full frequency deviation.
- 6.10.5.1 <u>Deviation Direction</u>. Increasing positive voltage gives increasing frequency. Predetection recorded tapes may be recorded with reverse deviation direction because of the frequency translation techniques employed.
- 6.10.6 <u>FM Reproduce Systems</u>. Output levels are for signals recorded at full deviation. In wide band and double density FM systems, the output is 2 V peak-to-peak minimum across a load impedance of 75 ohms ± 10 percent. Increasing input frequency gives a positive going output voltage.

6.11 PCM Recording

The PCM signals may be successfully recorded using several different methods. Methods included in these standards are predetection recording, post-detection recording, and serial high-density digital recording (HDDR). Parallel HDDR methods are not included.

- 6.11.1 Predetection PCM Recording. This method employs direct recording of the signal obtained by heterodyning the receiver IF signal to one of the center frequencies listed in table 6-6 without demodulating the serial PCM signal (see figure 6-4). The maximum recommended bit rate for predetection recording of NRZ data is equal to the predetection carrier frequency, for example, 900 kb/s for a 900 kHz predetection carrier. The maximum recommended bit rate for predetection recording of bi-phase (Bi ϕ) data is equal to one-half the predetection carrier frequency. For bit rates greater than one-half the maximum recommended rates, the preferred method of detection is to convert the signal to a higher frequency before demodulation.
- 6.11.2 <u>Post-Detection PCM Recording</u>. The serial PCM signal (plus noise) at the video output of the receiver demodulator is recorded by direct or wide band FM recording methods without first converting the PCM signal to bi-level form (see figure 6-4). Table 6-8 lists maximum bit rates versus tape speed for these recording methods. The minimum recommended reproduce bit rates are 10 kb/s for post-detection direct Biφ and 10 bits per second for post-detection FM (see paragraph 4.2.2.3).

TABLE 6-8. MAXIMUM RECOMMENDED BIT RATES, POST-DETECTION RECORDING¹

			Post-D)		
Ta	ipe Speed		Direct		Post-FM	
<u>m/s (ips)</u>	<u>mm/s (i</u>	ps)	Biφ (kb/s)		Biφ (kb/s) NRZ (k	(b/s)
Wide Band D	ouble Density	·				
6096.0 (240)	3048.0	(120)	1800	900	1800	
3048.0 (120)	1524.0	(60)	900	450	900	
1524.0 (60)	762.0	(30)	450	225	450	
762.0 (30)	381.0	(15)	225	112	225	
381.0 (15	190.5	(7-1/2)	112	56	112	
190.0 (7-1/2	2) 95.2	(3-3/4)	56	28	56	
95.2 (3-3/4	l)		28	14	28	
47.6 (1-7/8	3)		14	7	14	

- 6.11.3 <u>Serial High-Density Digital Recording</u>. Serial HDDR is a method of recording PCM data on a magnetic tape which involves applying the data to one track of the recorder as a bi-level signal.
- 6.11.4 This paragraph deals with standards for direct recording of PCM telemetry data using a wide band analog instrumentation recorder or reproducer system. Direct recording is described in paragraph 6.8. The recommended PCM codes, maximum bit rates, record and reproduce parameters, and the magnetic tape requirements are also described.
- 6.11.4.1 <u>PCM Codes</u>. The recommended codes for serial high-density PCM recording are bi-phase level (Bi ϕ -L) and randomized non return to zero-level (RNRZ-L). The maximum recommended bit packing densities (for wide band recording) re 590 b/mm (15 kb/in.) for Bi ϕ -L and 980 b/mm (25 kb/in.) for RNRZ-L. Refer to table 6-9 for maximum recommended bit rates versus standard tape speeds. The minimum recommended reproduce bit rates are 5 kb/s for Bi ϕ -L and 200 kb/s for RNRZ-L. Details of the implementation are discussed in paragraph 3.0, appendix D.

¹Direct recording of NRZ signals is NOT recommended unless the signal format is carefully designed to eliminate low-frequency components for any data expected.

TABLE 6-9. MAXIMUM RECOMMENDED BIT RATES

			•		
	Tape Spe	eed			
<u>m/s</u>	(ips)	mm/s	(ips)	$Bi\phi$ -L (kb/s)	RNRZ-L (kb/s)
Wide I	Band Double l	Density			
6096.0	(240)	3048.0	(120)	3600	6000
3048.0	(120)	1524.0	(60)	1800	3000
1524.0	(60)	762.0	(30)	900	1500
762.0	(30)	381.0	(15)	450	750
381.0	(15)	190.5	(7-1/2)	225	375
190.5	(7-1/2)	95.2	(3-3/4)	112	187¹
95.2	(3-3/4)			56	93¹
47.6	(1-7/8)			- 28	46 ¹
	•				

- 6.11.4.2 <u>Biφ-L Code</u>. The Biφ-L code is recommended for direct recording under the following conditions: the bit rate of the data to be recorded does not exceed the maximum bit rates for Biφ-L (see table 6-9), and the amount of tape required for mission recording by this method is not a severe operational constraint.
- 6.11.4.3 <u>RNRZ-L Code</u>. The RNRZ-L code is recommended for direct recording under any of the following conditions: the bit rate of the data to be recorded exceeds the maximum recommended bit rates for Biφ-L (see table 6-9) or maximum tape recording time is needed.
- 6.11.4.3.1 To minimize baseline wander anomalies, RNRZ-L is NOT recommended if the reproduced bit rate is less than 200 kb/s.
- 6.11.4.3.2 The RNRZ-L shall be implemented using a 15-stage shift register and modulo-2 adders (see figure 6-5). The randomized bit stream to be recorded is generated by adding (modulo-2) the input bit stream to the modulo-2 sum of the outputs of the 14th and 15th stages of the shift register. In the decoder, the randomized bit stream is the input to the shift register (see figure 6-5).

¹Reproducing data at bit rates less than 200 kb/s is not recommended when using RNRZ-L (see appendix D for details).

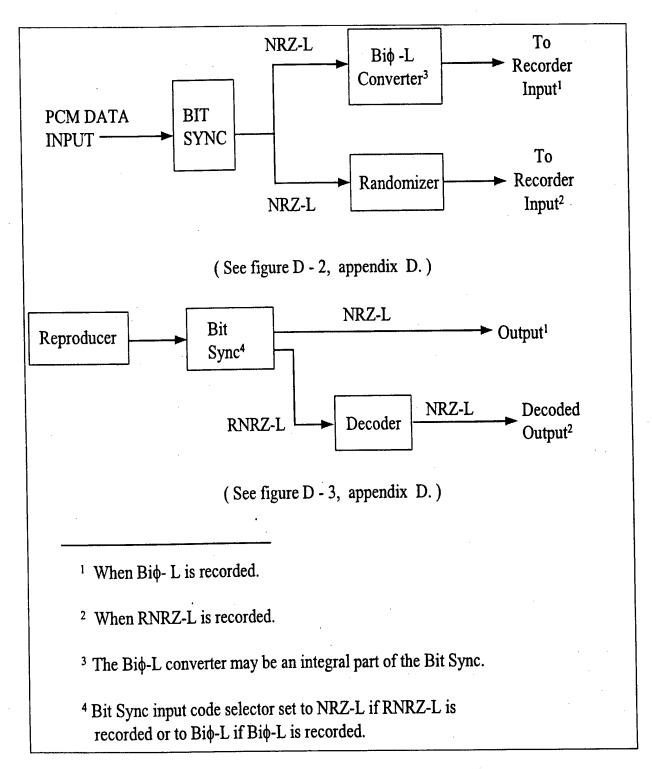


Figure 6-5. Serial high-density digital record and reproduce.

- 6.11.4.4 <u>Record Parameters</u>. The record parameters are explained in the following subparagraphs.
- 6.11.4.4.1 High-density PCM data shall be recorded in compliance with the direct record parameters detailed in subparagraph 6.8.1 including the use of an ac bias signal level which produces the required 2 dB over-bias condition.
- 6.11.4.4.2 The peak-to-peak level of the PCM input signal shall be equal to twice the rms value of the signal amplitude used to establish the standard record level with a tolerance of ± 25 percent (see subparagraph 6.8.2).
- 6.11.4.4.3 The signal to be recorded must be bi-level. Bi-level signals are signals where only two levels are present. Therefore, signals containing noise must be converted to bi-level signals before they are recorded.
- 6.11.4.4.4 To minimize the effects of tape dropouts, serial high-density digital data should not be recorded on the edge tracks of the tape.
- 6.11.4.5 <u>Reproduce Parameters</u>. All reproduce parameters in subparagraph 6.8.3 shall apply.
- 6.11.4.5.1 <u>PCM Signature</u>. A PCM signature should be recorded before or after or both before and after the data to provide a method for adjusting the reproduce head azimuth and the reproducer equalizers. The data rate of the PCM signature should be the same as the rate of the data to be recorded (see paragraph 7.0, appendix D for tape signature recording).
- 6.11.4.5.2 <u>Phase Equalizer</u>. Correct phase equalization is very important to the reconstruction of the serial high-density digital data. Adjustable phase equalizers are desirable but not mandatory.
- 6.11.4.6 <u>Magnetic Tape</u>. High-density digital (HDD) magnetic tapes are recommended; however, wide band instrumentation tapes can be used on recorder and reproducer systems with 1.27 mm (0.050 in.) track widths (see chapter 7).
- 6.11.4.7 <u>Tape Copying</u>. The following practices are recommended when making copies of original data tapes.
- 6.11.4.7.1 Convert data reproduced from the original tape to a bi-level signal prior to recording a copy.
- 6.11.4.7.2 Align reproduce head azimuth to original tape.
- 6.11.4.7.3 Adjust reproducer equalizers correctly.

- 6.11.4.7.4 Prior to recording the copy, use the recorded PCM signature to optimize the quality of the reproduced data.
- 6.11.4.8 <u>PCM Bit Synchronizer</u>. The PCM bit synchronizer should contain circuitry to reestablish the baseline reference PCM signal (a dc restorer circuit). This circuit is essential when reproducing RNRZ-L at reproduced bit rates less than 1 Mb/s. The PCM bit synchronizer loop bandwidth should be selected for optimum performance between 0.1 and 3 percent of the bit rate.



If an appropriate PCM bit synchronizer is not available, the tape can be copied directly; however, the SNR will be decreased.

6.12 Preamble Recording for Automatic or Manual Recorder Alignment

A preamble (or postamble) may be recorded on the same tape as the data signal with known frequency and amplitude elements which will allow automatic or manual alignment of the signal electronics to optimize the performance of the playback system. Reproduce azimuth, equalization, and FM demodulator sensitivity may be adjusted at all available tape speeds. The preamble may be used for manual adjustment of any instrumentation magnetic tape recorder/reproducer (wide band and double density). Automatic adjustment requires a recorder/reproducer specifically designed with the capability to automatically adjust one or more of the following: reproduce-head azimuth, amplitude equalization, phase equalization, and FM demodulator sensitivity. The signal source may be internal to the recorder or may be externally generated.

- 6.12.1 <u>Alignment, Direct Electronics</u>. Direct electronics shall use a 1/11 band edge square wave for both manual and automatic alignment as given in appendix D.
- 6.12.2 Alignment, FM Electronics. The FM electronics shall use a 1/11 band edge square wave and ± 1.414 Vdc or 0.05 Hz square wave for both manual and automatic alignment as given in appendix D.

6.13 19-mm Digital Cassette Helical Scan Recording Standards

These standards are for single-channel high-bit rate helical scan digital recorders using 19 mm tape cassettes. Bit rates of less than 10 megabits per second to 256 megabits per second or greater may be recorded and reproduced by equipment conforming to these standards. Interchange parties must, however, determine the availability at a particular site of the equipment required to meet particular data recording requirements. Compatibility between the recording device and the expected playback equipment must also be considered.

- 6.13.1 <u>Track Format</u>. The format recorded and reproduced by these systems shall be as specified in American National Standard For Information Systems 19-mm Type ID-1 Recorded Instrumentation Digital Tape Format, ANSI X3.175-1990². Helical tracks employ azimuth recording wherein the head gap angle with respect to the recorded track center line is 90° + 15° for one scan and 90° 15° for the adjacent scan. (See subparagraph 4.9.2 of standard X3.175-1990). Figure 6-6 and table 6-10 show details of the helical tracks and auxiliary longitudinal tracks for control, timing, and annotation in the ID-1 format.
- 6.13.2 <u>Tape and Cassettes</u>. Magnetic tape and 19-mm cassettes are specified in chapter 7. The magnetic tape shall meet the requirements for 850 oersted class (68,000 A/M). A tape base thickness of 16 um is normally employed. The recorder/reproducers shall be capable of using 19-mm cassettes that conform to the physical dimensions of medium and large cassettes as shown in table 6-11. Table 6-11 shows tape capacities and indicates the amount of time available for recording, assuming a data input rate of 240 megabits per second.
- 6.13.3 Recorder/Reproducer Input and Output. Data input and clock are required. The data input shall be in an 8-bit parallel, byte serial format, and the clock signal will be at the required byte rate. Data output will also be in 8-bit parallel format.

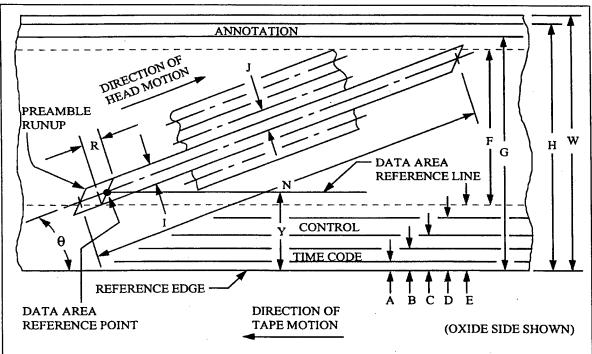


Figure 6-6. Location and dimensions of recorded tracks.

²ANSI X3.175-1990. Available from American National Standards Institute, 1430 Broadway, New York, NY 10018.

TABLE 6-10. RECORD LOCATION AND DIMENSIONS

	DIMENSIONS	NOMINALS			
A	TIME-CODE TRACK LOWER EDGE	0.2	mm		
В	TIME-CODE TRACK UPPER EDGE	0.7	mm		
C	CONTROL TRACK LOWER EDGE	1.0	$\mathbf{m}\mathbf{m}$		
D	CONTROL TRACK UPPER EDGE	1.5	mm		
E	DATA-AREA LOWER EDGE	1.8	mm		
F	DATA-AREA WIDTH	16	mm		
G	ANNOTATION TRACK LOWER EDGE	18.1	mm		
Н	ANNOTATION TRACK UPPER EDGE	18.8	mm		
1	HELICAL TRACK WIDTH	0.045	mm		
J	TRACK PITCH, BASIC	0.045	· mm		
N	HELICAL TRACK TOTAL LENGTH	170	mm		
P	ANNOTATION/TIME-CODE HEAD LOCATION	118.7	mm		
R	SECTOR RECORDING TOLERANCE	±0.1	mm		
T	CONTROL TRACK SYNC TOLERANCE	±0.1	mm		
P	TRACK ANGLE, ARC-SINE (16/170)	5.4005°			
w	TAPE WIDTH	19.01	mm		
Y	DATA-AREA REFERENCE LINE, BASIC	1.8075	mm		

TABLE 6-11. TAPE LENGTH AND NOMINAL PLAY RECORD/ REPRODUCE TIME AT 240 MEGABITS/SECOND USER DATA RATE

1 (4) (4) (4) (4) (5) (4) (5) (4)	and the state of t						
	TAPE	TAPE	PLAY				
CASSETTE	THICKNESS	LENGTH	TIME				
	(MICROMETERS)	(METERS)	(MINUTES)				
MEDIUM	16	587	24				
LARGE	16	1311	55				
CASSETTE DIMENSIONS, NOMINAL							
CASSETTE	LENGTH	WIDTH	THICKNESS				
MEDIUM	254 mm	150 mm	33 mm				
LARGE	366 mm	206 mm	33 mm				

6.14 <u>Multiplex/Demultiplex (MUX/DEMUX) Standard for Multiple Data Channel</u> <u>Recording on 19-MM Digital Cassette Helical Scan Recorder/Reproducer Systems</u>

For recording and reproducing multiple channels on 19-mm Digital Cassette Helical Scan Recorders, the ADARIO multiplex/demultiplex format is recommended. The ADARIO (Analog/Digital/ Adaptable/Recorder Input/Output) format was developed for the Department of Defense, Fort Meade, Maryland. The format is government-owned and may, therefore, be used in equipment provided for government activities. Some of the features of ADARIO are

- requires less than 3 percent overhead to be added to user data;
- accommodates multiple channel record/playback with each channel completely autonomous in sample rate and sample width;
- stores all the necessary parameters for channel data reconstruction for either real-time playback, time-scaled playback, or computer processing;
- preserves phase coherence between data channels;
- provides channel source and timing information; and
- accommodates 2²⁴ (over 16 million) blocks of data, each block having 2048 24-bit words (see figure 6-7).

The ADARIO format imposes minimum restrictions on the channel signals and aggregate data parameters. Specific implementations that use the ADARIO format may impose additional restrictions.

ADARIO format, defined field restrictions:

Session Length - Unlimited

Sequence numbered - Blk. 2²⁴ (100 G Byte max.)

Master Clock - MC 2¹⁹ *250 Hz (131 MHz max.)

Block Rate - BMD, MC/BMD (8 Blk./Sec min.)

MC/2048 (64K Blk./Sec. max.)

Aggregate Rate - MC *24 (3145 Mbps max.)

Channel Quantity - Q, Ch#, 2⁴ (16 channels max.)

Bits per Sample - FMT, 1,2,3,4,5,6,7,8,10,12,14,16

18,20,22,24 bits per sample

Input Clock Rate - MC, Rate 2¹⁹ *250 Hz (131 MHz max.)

Input Bit Rate - 2035 *24 Block Rate (3125 Mbps max.)

Analog Bandwidth - MC/2.5 (52.4 MHz max.)

Analog Attenuation - Atten, 2⁵ (-15 dB, +16 dB)

Analog Coupling - DCAC (dc or ac)

Time Correlation - 1/MC (7.6 ns max. Resolution)

- TD/MC 2¹⁶ (65, 536*MC max. Range)

Channel Card Types - CHT, 2⁶ (64 max.)

Channel input digital data can be in any format, serial or parallel, in any coding, and at any levels, TTL, ECL, that can be accommodated by the channel type card used. Channel input analog signals can contain any form of modulation, at any nominal level, with any dynamic within the limitations (see figure 6-8).

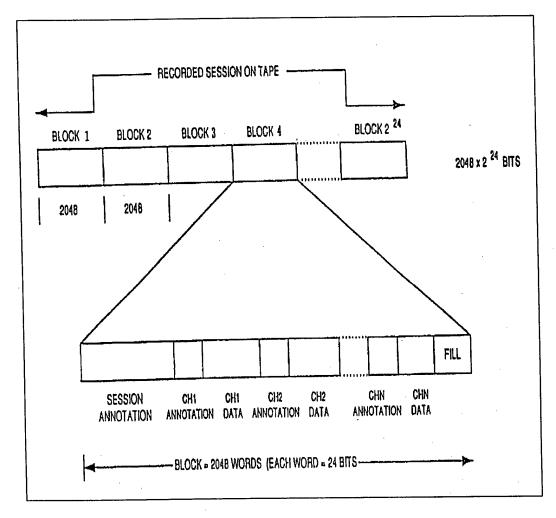


Figure 6-7. ADARIO block format.

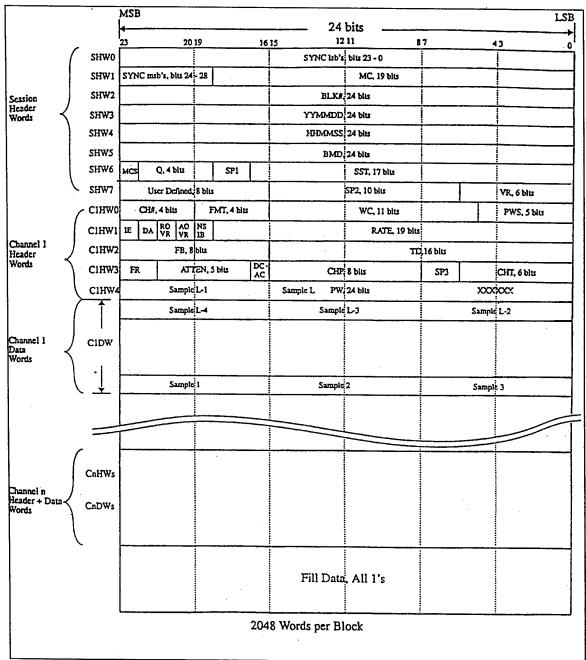


Figure 6-8. ADARIO data format.

6.15 <u>Submultiplex/Demultiplex Standards for Multiple Data Channels on a Primary Digital Multiplex/Demultiplex Channel</u>

For combining multiple low to medium rate telemetry channels on a single primary digital channel such as the ADARIO input channel, the submultiplex (submux) format is recommended. The format was developed for test range applications where high quantity of channels must be collected in conjunction with high data rate primary channels. The submux format provides a standard for extending the ADARIO primary

channel or any other primary digital channel for conveying data from up to 31 subchannels in digital aggregate data form. Each channel is totally autonomous and can be enabled/disabled at any time. Some of the features of the submux format are

- accommodates analog, digital clocked and asynchronous, time and annotation text, and other application specific telemetry channels;
- requires less than 0.3 percent of overhead per channel;
- stores all necessary parameters for channel signal reconstruction in real or scaled time;
- preserves phase coherence between all channels for all rates (dc to maximum) and all types of channels; and
- accommodates variable and fixed rate primary channel of up to 256 Mbps.
- 6.15.1 Format Structure. General structure of the submux format is based on a constant block rate and variable block data length for each channel data block. The aggregate data stream is the sequential collection of each enabled channel data block with a three-word header. Each channel data block is the sequential collection of data samples or events within the block time period. A reserved channel (channel ID=31) provides frame synchronization and block timing and is always the first channel in the frame sequence. Individual channels can be enabled or disabled at any time within the rate limitations of the primary channel. Primary channel redundant parameter fields such as date, time, and annotation are placed in optional defined channel types, thereby, minimizing overhead caused by redundancy. All data and headers are bit packed into 16-bit words. All fields, unless specifically stated, are binary coded. Physical implementation of the format may have design restrictions as to types and quantities of channels and maximum allowable field limits.
- 6.15.2 Implied Parameters and Limits. Maximum aggregate rate (256 Mbps), block rate, first sample time delay measurement, and internal sample period are based on a 16-MHz clock rate divided by 2_N , where N can be set from 0 to 7 defining the derived clock. Block rate is based on the derived clock divided by 20 160 which sets the limit on the total aggregate word count of all channels in a block period. The maximum block rate (793.65 blocks per second) in conjunction with the 16-bit bit count field, limits the maximum subchannel input rate to 52 Mbps. The 16-MHz clock limits the time delay resolution to 62.5 nanoseconds.

The maximum number of channels is limited by the 5-bit field and the reserved block sync channel to 31 channels numbered from 0 to 30. Channel ID of 31 is the reserved block sync channel that conveys timing information. To accommodate fixed rate primary channel, fill can be inserted after the last channel data block, prior to the next block sync channel (at the end of the frame), and must consist of all binary ones (FFFF hex word value).

Channel priority is fixed in channel number sequence with channel ID of 31 (block sync) first, followed by channel ID 0, if enabled, to channel ID 30, followed by fill (if required) to maintain fixed channel rate. Any channel can be one of eight channel types. Type 0 channels convey timing data in the 3-word header and have implied data length of 0. Type other than zero contains the bit count field that defines the length of valid data in the data block. The actual word length of the data block is the integer of ((Bit Count + 15)/16). Channel type also defines the content of the fields in the header.

6.15.3 <u>Defined Parameters</u>. Each channel data block has a 3-word (16-bit) header that contains the channel ID number, channel type, and other defined and undefined fields based on the channel type code. Undefined fields are reserved for future use and should be zero filled. Each channel header also contains up to 4 status bits that indicate the condition in the current data block or the condition of the last aggregate frame.

Channel ID 31 is a special form of channel type 0. The first two words are used for synchronization and are F8C7 BF1E hex value. The block rate clock (BRC) defines the main clock binary divider and is used for time scaled signal reconstruction. Each increment time period doubles. "Fill" indicates if the primary channel requires fill for fixed data rate.

Channel ID can be any unique number from 0 to 30 and designates the physical subchannel used for acquiring the data. Channel type defines the type of data this channel conveys and is currently defined for 0 to 5.

A type 0 "Time Tag" channel typically processes IRIG time code data and is used to time tag the frame. The Days Hours Minutes Seconds Fractional Seconds fields are the content of IRIG time code input or channel derived and in the same BCD form as the IRIG G time code.

Type nonzero headers contain FMT field that defines the format of the sample in bits per sample, 4-bit status field that indicates any errors or warnings pertaining to the current data block, bit count field that defines the length of valid data in the data block, and time delay field that (when external clock is used) indicates the delay from block time to the first sample in the BRC defined clock periods. When the internal clock is used, as indicated by type or most significant bit (MSB) of time delay, the sample period field defines the period of the internal sample clock in the BRC defined clock periods. The internal sample clock is always an integer divisor of the block period and the first sample is coincident with the block time. In type 1 blocks, this field is used for sequential block count.

When the internal clock is used with digital serial channel, the data and clock lines are sampled at the designated rate and result in eight data and eight clock samples per data block word. Otherwise, all incoming digital data are sampled at the incoming clock and results in a sample in the data block, with the first sample being left justified in the first word with "format" designated number of bits starting with the MSB of the

sample. Samples are bit sequentially packed regardless of word boundaries. The last sample in the block period is fully packed into the current data block with the remaining portion of the word, if any, being left undefined.

- 6.15.4 Aggregate Format on the Primary Data Channel. Figures 6-9a and b show the defined types of channel data from which the aggregate is composed. The primary data will always consist of the "Frame Sync" block followed by one or more unique channel blocks, followed by fill if required. The frame sync block will be generated at block rate. Aggregate data may be clocked by the primary channel or by the submux at constant or burst rate depending on the primary channel characteristics. Data format field definitions appear in appendix G, Submux Data Format Field Definitions.
- 6.15.5 <u>Submux/Demux FILL Requirement</u>. The submux produces aggregate data at the user aggregate data rate. In other words, the rate and amount of data produced on the aggregate output is directly proportional to the user specified clock and data format bits and is averaged over the frame period. This variable aggregate data rate is acceptable to variable rate primary channels or buffered variable rate recorders.

Fixed rate primary channels and fixed rate recorders require data at some fixed rate. The fixed rate is usually set to be the maximum expected user aggregate rate. When the user aggregate rate is less than the maximum, then some sort of filler is necessary to maintain the constant output rate. The format-specified fill word provides this filler and is automatically generated when the primary channel or fixed rate recorder provides clocks after the last word of the last enabled channel is clocked out within the frame period. Fill is always terminated by the Frame of Block Sync channel, indicating the presence of the next frame data.

The quantity of fill words is totally dependent on the fixed primary channel rate and the average user aggregate rate within one frame period. Minimum is zero words when user rates are at the maximum and equal to the fixed rate (minus the overhead). When user rates are at the minimum, maximum amount of fill will be generated for maintaining constant output rate.

DWI DS1 DS2 DS3 DS4 DS5 DS6 DS7 DS8 DS9 DS10 DS11 DS12 DS13 DS14 DS15 DS16 DS16 DS16 DS16 DS16 DS16 DS16 DS16

Figure 6-9a. Submux data format.

	HW1 CHN ID = 0 TO 30 CHT = 2 FMT = 0 FMT = 0 0 0 0 ST3 HW2 I/E=1 . BIT COUNT = L SAMPLE PERIOD . SAMPLE PERIOD HW3 I/E=1 . SAMPLE PERIOD . . DW1 DS1 DS2 DS3 DS4 DS5 DS5 CS1 CS2 CS3 CS4 CS5 CS7	DWN DSL- DSL- HW1 CHN I HW2 HW3 I/E=0 TIME D DW1 SW3	AND HW2 HW3 I/E=1 CHN ID = 0 TO 30 CHT = 4 BIT COU HW3 I/E=1	G	FW FILL WORD = FFFF HEX
-	DIGITAL SRL. INŢ. CLK	DIGITAL PRL. EXT. CLK	ANALOG WIDE BAND	ANALOG STEREO "L" & "R"	FILL

Figure 6-9b. Submux data format.

6.16 1/2 Inch Digital Cassette (S-VHS) Helical Scan Recording Standards

These standards are for helical scan digital magnetic tape recorder/reproducers using the Very Large Data Store (VLDS) format. This standard is intended for applications where compact size is needed and bit rates do not exceed 32 or 64 megabits per second (Mbps). The VLDS is a 12.65 mm (1/2 inch) S-VHS (850 oersteds nominal) media based tape format. This standard describes the salient features of the LDS format. To ensure crossplay compatibility between recorders of different manufacturers, refer to Metrum Document Number 16829019¹.

- 6.16.1 <u>Tape and Tape Cartridge</u>. The tape shall conform to Magnetic Media Laboratory (MML) Document Number 93-1, <u>Specification for Rotary Instrumentation Magnetic Recording Tape</u>, 68KA-M (850 oersteds), dated 16 February 1993 and the tape cartridge shall conform to ANSI Standard V98.33M-1983, <u>Specification for Physical Characteristics and Dimensions</u>.
- 6.16.2 Format Types. There are four standard formats: two B formats provide 32 Mbps standard density or 64 Mbps high density for most applications where severe environmental conditions are not encountered, and two E formats provide 16 Mbps standard density or 32 Mbps high density for harsh environments involving extremes of vibration and temperature. A tape made on a standard density system may be reproduced on a high density system. Relative to the B formats, the E formats use a 100 percent larger track pitch, an 81 percent larger track width, and a larger guard band providing a very large margin for accurately tracking and recovering data under extreme conditions. The E formats provide only about one-half the data storage capacity of the B format but can be played back on a B format system.
- 6.16.2.1 <u>B Format</u>. These formats originate from helical scanner implementations using four helical heads organized in pairs at 180° separation. The heads are both read and write functionally and are supported by two parallel sets of read/write electronics referred to as data channels. Helical track dimensions are given in figure 6-10.
- 6.16.2.2 <u>E Format</u>. These formats originate from helical scanner implementations using two helical heads with wider track widths at 180° separation on the scanner. The heads are both read and write functionally. One set of read/write or write only electronics is required. Helical track dimensions are given in figure 6-11.

¹ Metrum Document Number 16829019, <u>VLDS Magnetic Tape Recorder/Reproducer Tape Cartridge Format Specification</u>. Available from Metrum, Inc., 4800 E. Dry Creek Road, Littleton, Colorado 80122.

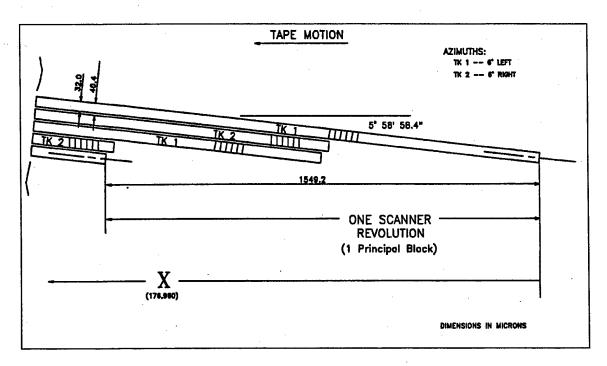


Figure 6-10. Helical track dimensions, B format.

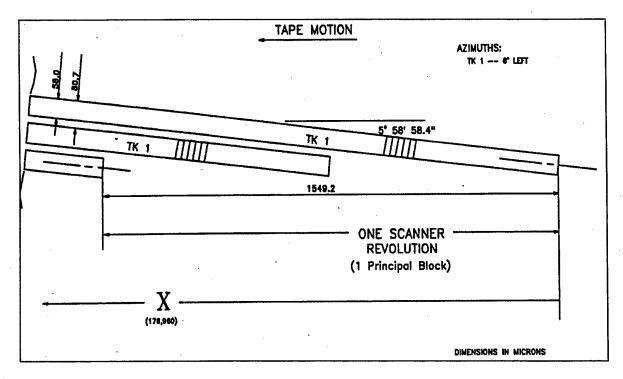


Figure 6-11. Helical track dimensions, E format.

- 6.16.3 <u>Data Storage</u>. Data are recorded onto 12.65 mm (1/2 in.) wide magnetic tape using both rotating and fixed heads (see figure 6-12). The rotating heads record data in adjacent track patterns at an inclined angle to the normal tape motion. The fixed heads record data on tracks parallel to the tape motion. The fixed head tracks are used for control and servo purposes and do not directly record user data.
- 6.16.4 <u>Physical Relationships</u>. Maintaining high accuracy of the ratio between scanner rotational speed and tape speed (1.5492 mm (0.0610 in.) of tape motion per scanner rotation) is critical to maintaining the format geometry. Head and tape speed will vary accordingly with changes in the other two speed parameters. The three speed parameters vary linearly with

desired user data rates. Parameters used with a user data rate of 32 Mbps (B) or 16 Mbps (E) are as follows:

2¹⁷=131 072 bits (16 KBytes) user bits/helical track scanner diameter 62.000 mm + 0.008/-0.000 mm(2.44 in. + 0.0003 in.)scanner rotation speed 3662.1 rpm tape speed 94.55 mm/sec (3.72 in./sec.) head/tape speed 11 794.30 mm/sec (464.34 in./sec.) 5° 56' 7.4" basic dimension helix angle (head rotational plane to ref. edge of tape) head gap length refer to Metrum Document 16829019 tape tension (inlet side of $0.35N \pm 0.02N$ scanner)

- 6.16.5 <u>Helical Track Organization</u>. Each group of four helical tracks resulting from one complete revolution of the scanner (two helical tracks for the E formats) is termed a principal block on the tape. A principal block is the smallest increment of data that may be written to or read from the tape. Each principal block is assigned a unique number which is recorded as part of the helical track. Helical tracks containing user data begin with the number 1 and are sequentially incremented on the tape up to the capacity of the cartridge. Whenever new data are appended on a previously recorded cartridge, the new data are precisely located to begin with the next helical track location after the previous end of data point with no interruption or discontinuity in track spacing.
- 6.16.6 <u>Recorded Information</u>. The following subparagraphs contain additional information.
- 6.16.6.1 Add overhead bytes generated by error correction encoding algorithms.
- 6.16.6.2 Provide preamble and postamble patterns for isolation of the information at the beginning and ends of the helical tracks.
- 6.16.6.3 Provide clock synchronization patterns to facilitate clock recovery at the beginning of each helical track.

- 6.16.6.4 Add patterns throughout the helical track to maintain synchronization and counteract bit slips during data extraction.
- 6.16.6.5 Provide redundantly recorded principal block numbers for organizing data on the cartridge.
- 6.16.6.6 Include a user specifiable volume label for identifying the entire cartridge.
- 6.16.6.7 Add miscellaneous data used to convey information about the organization of data on the cartridge and within the helical tracks.
- 6.16.7 <u>Recording Geometry and Physical Dimensions</u>. Included in the following subparagraph are the recording geometry and the physical dimensions.
- 6.16.7.1 <u>Tape Reference Edge</u>. The tape reference edge for dimensions specified in this section shall be the lower edge as shown in 6-12. The magnetic coating, with the direction of tape travel as shown in figure 6-10, shall be the side facing the observer.
- 6.16.7.2 <u>Helical Tracks</u>. Contained in the succeeding subparagraphs are the helical tracks attributes.
- 6.16.7.2.1 <u>Track Widths</u>. The width of a written track shall be 0.032 mm \pm 0.002 (0.0013 in. \pm 0.000079) for the B formats and 0.058 mm \pm 0.002 (0.0023 in. \pm 0.000079) for the E formats.
- 6.16.7.2.2 <u>Track Pitch</u>. The distance between the center lines of any two adjacent tracks, measured perpendicular to the track length, shall be 0.0404 mm (0.0016 in.) for the B formats and 0.0808 mm (0.0032 in.) for the E formats.
- 6.16.7.2.3 <u>Track Straightness</u>. Either edge of the recorded track shall be contained within two parallel straight lines 0.005 mm (0.0002 in.) apart. The center lines of any four consecutive tracks shall be contained within the pattern of four tolerance zones. Each tolerance zone is defined by two parallel lines which are inclined at an angle of 5° 58' 58.4" basic with respect to the tape edge. The center lines of the tolerance zones shall be spaced 0.0404 mm (0.0016 in.) apart for the B format and 0.0808 mm (0.0032) apart for the E format. The width of the first tolerance zone shall be 0.007 mm (0.00028 in.). The width of tolerance zones two, three, and four shall be 0.011 mm (0.0004 in.). These tolerance zones are established to contain track angle, straightness, and pitch errors.
- 6.16.7.2.4 Gap Azimuths. The azimuth of the head gaps used for the helical track recording shall be inclined at angles of \pm 6° \pm 15' to the perpendicular to the helical track record (see figures 6-10 and 6-11). For the E formats and for the first and third tracks of every principal block of the B formats, the recorded azimuth is oriented in the clockwise direction with respect to the line perpendicular to the track direction when viewed from the magnetic coating side of the tape. For the B formats, the second and fourth tracks of each principal block are oriented in the counterclockwise direction.

- 6.16.7.2.5 <u>Track Guard Bands</u>. The nominal unrecorded guard band between any two adjacent helical tracks shall be 0.008368 mm (0.0003 in.) for the B formats and 0.022737 mm (0.0009 in.) for the E formats.
- 6.16.7.2.6 Track Angle. The track angle shall be 5° 58' 58.4".
- 6.16.7.2.7 Track Length. The track length shall be 96.619 mm (3.80 in.).
- 6.16.7.2.8 <u>Physical Recording Density</u>. The maximum physical density of the recording shall be 1930 or 3776 flux transistors per millimeter (ftpmm) respectively for the 32 and 64 Mbps systems.
- 6.16.7.3 <u>Longitudinal Tracks</u>. The characteristics of the longitudinal tracks are described in the subsequent subparagraphs.
- 6.16.7.3.1 Servo Track. The servo track is located along the reference edge of the tape as shown in figure 6-12. The azimuth angle of the servo track head gap shall be perpendicular to the recorded track. The recording of the servo track is composed of a recorded pulse (nominally 0.0185 mm (0.0007 in.)) for each principal block on the tape. The recording shall achieve full magnetic saturation for at least half the pulse. The time duration of the pulse is determined by the tape speed to yield this physical dimension. During the interval between pulses, no magnetic recording occurs on the track. The pulse is timed to begin coincident with the midpoint of the principal block (the data channel switches from first to second head). The physical offset from the longitudinal head to the helical heads is shown in figures 6-10, 6-11, and 6-12 as dimension "X."
- 6.16.7.3.2. Filemark Track. The filemark track is located near the top of the tape as shown in figure 6-12. The azimuth angle of the filemark track head gap shall be perpendicular to the recorded track. The recording of the filemark track is composed of a series of pulses located in conjunction with the principal block to be marked. Each filemark is composed of three redundant pulses (nominal 0.005 mm (0.0002 in.)). The three pulses are typically spaced 0.029 mm (0.0011 in.) apart with a maximum span of 0.09 mm (0.0035 in.) from the beginning of the first to the beginning of the third. This triplet of pulses is for redundancy against tape flaws and on detection are treated as one filemark regardless of whether 1, 2, or 3 pulses are detected. The filemark pulses are associated with a specific principal block by initiating the first pulse between 4 to 5.5 msec after the midpoint of the principal block. (Data channel switches from first to second head.)

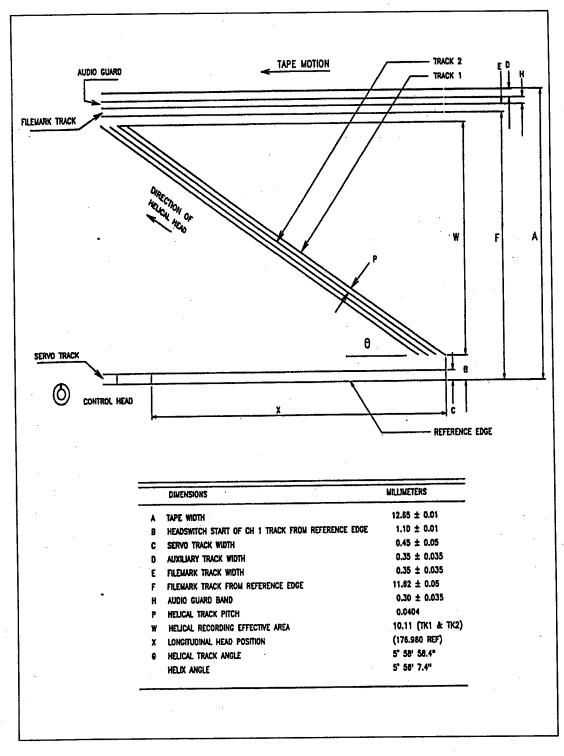


Figure 6-12. Recorded tracks on tape, B format.

6.16.8 <u>Tape Cartridge Format</u>. The physical format of the recording along the length of the tape is shown in figure 6-13. Immediately following the physical beginning of tape (PBOT) is an unused portion of tape, followed by the cassette format zone which precedes the logical beginning of tape (LBOT). Principal blocks of user data shall be recorded between LBOT and the logical end of tape (LEOT), which precedes the physical end of tape (PEOT).

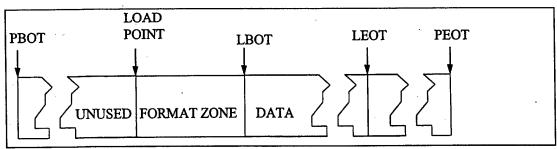


Figure 6-13. Tape cartridge layout.

6.16.8.1 <u>Load Point</u>. The load point is defined as the first point after PBOT accessible by the recording system with the tape fully engaged to the scanner.

6.16.8.2 Format Zone. The format zone begins at the load point, precedes the LBOT, and consists of a minimum of 450 principal blocks recorded on the tape. It provides a run up area for the servo systems and principal block identification allowing precise location of the LBOT where user data begin. The zone must be prerecorded to prepare the cartridge to accept user data. This process involves locating at the load point and beginning recording as soon as tape speed servo lock is achieved. The principal blocks recorded are numbered beginning with a negative number and counting up until principal block 0 is recorded. Principal block 0 shall be the last recorded block in the format zone. Principal blocks recorded in the format zone do not contain user data or error correction coding (ECC) overhead bytes, but do contain the remaining miscellaneous information described in paragraph 6.16.6 and in the helical track data format descriptions. The volume label for the cartridge is irreversibly determined at the time the format zone is recorded.

6.16.8.3 <u>Logical Beginning of Tape</u>. The logical beginning of tape denotes the end of the format zone and the point at which principal blocks containing reproducible data begin. The first principal block containing useful information shall be assigned the number one.

6.16.8.4 <u>Data Zone</u>. Beginning with principal block 1 at LBOT and continuing through to LEOT, the data zone shall be the principal blocks which record user data as well as the added miscellaneous information to allow full reproduction and management of the data on the tape cartridge.

6.16.8.5 <u>Logical End of Tape</u>. The logical end of tape is a physical principal block count. The principal block count for the standard ST-160 tape cartridge is 210 333.

6.16.9 Helical Track Format. The format for writing data into a single helical track is shown in figure 6-14. The term "bits" refers to actual on tape bit cells. Each helical track begins with a preamble area consisting of 6216 bits of an alternating pattern of three 0 bits and three 1 bits for the 32 Mbps system or 9240 bits for the 64 Mbps system. This 6-bit pattern is repeated 1036 or 1540 times. The preamble is followed by a track synchronization area. This area provides for obtaining registration to the track data patterns. It is composed of four zones of 732 bits each with an alternating 0 and 1-bit pattern that facilitates clock recovery. Each of these four zones is followed by a 36-bit sync pattern. These sync patterns are described more fully in subparagraph 6.16.9.1. The track synchronization area ends with 24 bits of an alternating pattern of three 0 bits and three 1 bits. The central area is where actual user data are recorded in 138 data blocks for the 32 Mbps system or 276 data blocks for the 64 Mbps system. Each data block contains 205 5/6 modulation code frames of interleave data for a total of 1230 bits.

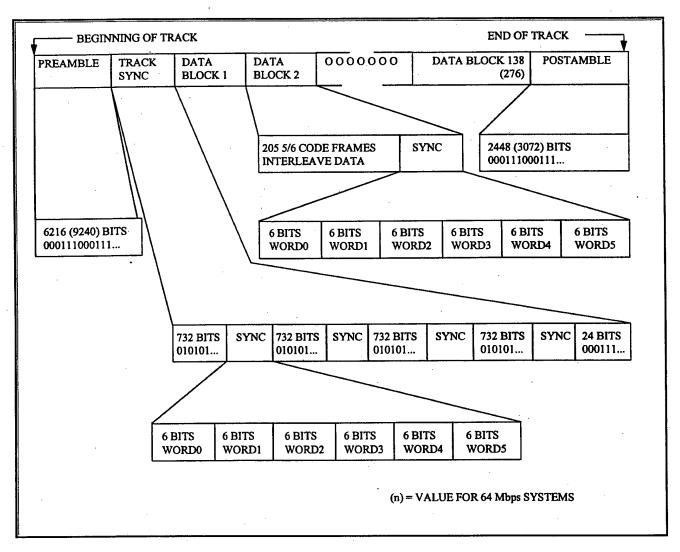


Figure 6-14. Helical Track Format.

This data is followed by a 36-bit sync pattern. Sync patterns and interleave data are more fully described next. Each helical track ends with a postamble pattern of three 0 bits and three 1 bits. This is the same pattern as the preamble. Compiling all bits yields an overall track total of 186 468 tape bits for the 32 Mbps system and 364 824 tape bits for the 64 Mbps system. Since each contains 131 072 or 262 144 user bits, overheads are 29.7 and 28.1 percent.

6.16.9.1 Sync Patterns. Each helical track contains 142 or 280 sync patterns as shown in figure 6-14. Four of these are contained in the track sync area with the remaining 138 or 276 distributed at the end of each data block. These sync patterns provide registration to the bit sequence and allow management of bit slips. The track and data sync consists of 36 bits in the form of six 6-bit words. The first five words are the same for all sync words. They are

WORD0	$2A_h$	WORD3	$0F_h$
WORD1	2A _h	WORD4	$2l_h$
WORD2	$0C_{\mathbf{h}}$		

WORD5 defines which sync word is being issued in the following manner:

Sync Location	Words	Sync Location	<u>Words</u>
Track Sync 1	39 _h	Data Sync 4	$2E_h$
Track Sync 2	35 _h	Data Sync 5	$2B_h$
Track Sync 3	$2D_{\mathbf{h}}$	Data Sync 6	$2E_{\mathbf{h}}$
Track Sync 4	$1D_{\mathbf{h}}$	•	•
Data Sync 1	$2B_{\mathbf{h}}$	• .	•
Data Sync 2	2E _h	Data Sync 279	$2B_h$
Data Sync 3	$2B_{\mathbf{h}}$	Data Sync 280	$2E_{\mathbf{h}}$

6.16.9.2 <u>Data Blocks</u>. Each helical track contains 138 or 276 data blocks which record the user data as well as miscellaneous information used in locating and managing data on the tape cartridge (see figure 6-14). The construction of these data blocks is performed by each channel's data path electronics. Figure 6-15 illustrates a typical block diagram of a channel data path as described in the following subparagraphs.

6.16.9.2.1 Error Correction Encoding. An interleaved Reed-Solomon (RS) code is used for error detection and correction. An outer ECC is applied to written data first which is an RS (130, 128) for purposes of error detection only. An inner ECC is subsequently applied which is an RS (69, 65) for error detection and correction. The resulting encoded data is stored in a multiple page interleave buffer memory array containing 128 rows by (2x69) or (8x69) columns of encoded user data. For the outer ECC, incoming data is arranged in groups of 128 bytes each. The outer ECC encoder appends 2 check bytes to each 128 byte block. For the inner ECC, the 130 byte group resulting from the outer ECC is divided into two 65 byte blocks. The first 65 byte block (ECC codewords 1, 3, 5, ...) contains all user data while the second 65 byte block (ECC codewords 2, 4, 6, ...) contains 63 bytes of user data with the last 2 bytes being the check bytes generated by the outer ECC. The inner ECC encoder appends 4 check bytes to each 65 byte block.

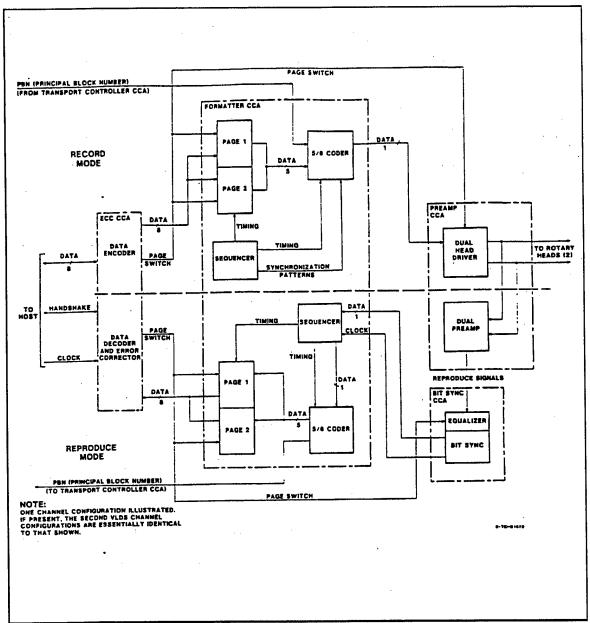


Figure 6-15. Typical VLDS data path electronics block diagram.

Operations in the RS encoder are performed using numbers in a finite field (also called a Galois field (GF)). The field used contains 256 8-bit elements and is denoted GF (256). The representation of GF (256) used is generated by the binary degree eight primitive polynomials.

$$p(x) = x^8 + x^4 + x^3 + x^2 + 1$$
 outer ECC
 $p(x) = x^8 + x^5 + x^3 + x + 1$ inner ECC

The ECC generator polynomials are

$$G(x) = (x+a^{24}) (x+a^{25})$$
 outer ECC
 $G(x) = (x+1) (x+a) (x+a^2) (x+a^3)$ inner ECC

where "a" denotes the primitive element of the field.

6.16.9.2.2 <u>Interleave Buffer</u>. Encoding data from the two levels of ECC are stored in an interleave buffer memory. The architectures for this memory are shown in figure 6-16. This buffer allows interleaving of the encoder data. Interleaving spreads adjacent ECC code word bytes within a helical track for the 32 Mbps system to minimize the effect of burst error events. For the 64 Mbps system, interleaving spreads adjacent ECC codeword bytes within two helical tracks (two helical tracks per channel per principal block) to further minimize burst error effects. Data to and from the ECC are accessed along horizontal rows in the memory matrix. Data to and from tape are accessed along vertical columns in the memory. Each column in the matrix consists of 128 bytes which will constitute one block in the helical track format (see figure 6-14).

6.16.9.2.2.1. Exchange of Data with ECC. Addressing of the interleave buffer for exchange of data with the ECC for the 32 Mbps systems is

ADDRESS RANGE (hexadecimal)
0080 to 00C4
0000 to 0044
0180 to 01C4
0100 to 0144
0380 to 03C4
ADDRESS RANGE (hexadecimal)
0200 to 0244
•
•
•
7E80 to 7EC4
7E80 to 7EC4 7E00 to 7E44

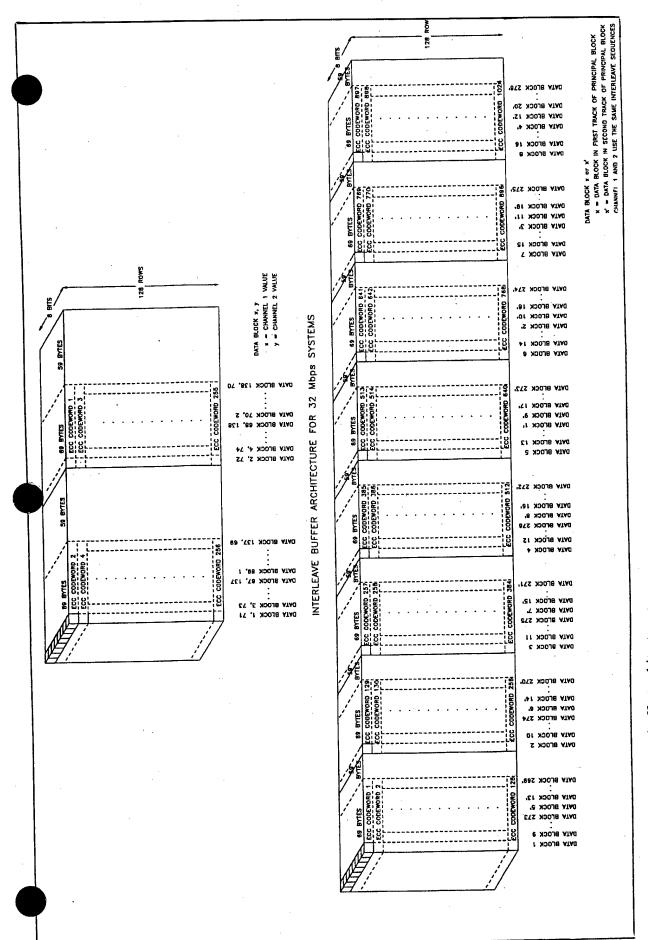


Figure 6-16. Interleave buffer architectures.

Addressing of the interleave buffer for exchange of data with the ECC for the 64 Mbps systems is

ECC CODEWORD	ADDRESS RANGE (hexadecimal)
1 .	00000 to 00044
2	00400 to 00444
3	00800 to 00844
•	•
•	
100	1FC00 to 1FC44
128	
129	00080 to 000C4
130	00480 to 004C4
•	•
• .	•
•	•
256	1FC80 to 1FCC4
257	00100 to 00144
258	00500 to 00544
•	
• ,	•
•	•
512	1FD80 to 1FDC4
513	00200 to 00244
514	00600 to 00644
•	•
•	•
•	
1024	1FF80 to 1FFC4

Each codeword is 69 bytes long. The address increments by hex 001 for each byte in a codeword. The first data byte sent to/from the ECC for each helical track is stored in location 000.

6.16.9.2.2.2 Exchange of Data To and From Tape. Addressing of the interleave buffer for exchange of data to and from tape for the 32 Mbps system is

DATA BLOCK ADDRESS RANGE (Channel 1) ADDRESS RANGE (Channel 2)

1	0000 to 7F00	0022 to 7F22
2	0080 to 7F80	00A2 to 7FA2
3	0001 to 7F01	0023 to 7F23
4	0081 to 7F81	00A3 to 7FA3
5	0002 to 7F02	0024 to 7F24
6	0082 to 7F82	00A4 to 7FA4

DATA BLOCK ADDRESS RANGE (Channel 1) ADDRESS RANGE (Channel 2)

0021 to 7F21	0043 to 7F43
00A1 to 7FA1	00C3 to 7FC3
0022 to 7F22	0044 to 7F44
00A2 to 7FA2	00C4 to 7FC4
0023 to 7F23	0000 to 7F00
•	•
•	•
•	•
0043 to 7F43	0020 to 7F20
00C3 to 7FC3	00A0 to 7FA0
0044 to 7F44	0021 to 7F21
00C4 to 7FC4	00A1 to 7FA1
	00A1 to 7FA1 0022 to 7F22 00A2 to 7FA2 0023 to 7F23 0043 to 7F43 00C3 to 7FC3 0044 to 7F44

Each data block is 128 bytes long. The address increments by hex 0100 for each byte in a data block. The first byte sent to/from tape for each channel 1 helical track is stored in location 0000. The first byte sent to/from tape for each channel 2 helical track is stored in location 0022.

Addressing of the interleave buffer for exchange of data to/from the 64 Mbps system is

<u>DATA BLOCK</u>	ADDRESS RANGE (hexadecimal)
1	00000 to 1FC00
2	00080 to 1FC80
3	00100 to 1FD00
4	00180 to 1FD80
	•
	•
8	00380 to 1FF80
9	00001 to 1FC01
10	00081 to 1FC81
•	·
275	00122 to 1FD22
276	001A2 to 1FDA2
1'	00222 to 1FE22
2,	002A2 to 1FEA2
3'	00322 to 1FF22
3	00322 to 11122
0.2	001 A 2 to 1ET A 2
8'	001A3 to 1FDA3
9'	00223 to 1FE23

DATA BLOCK

ADDRESS RANGE (hexadecimal) 002A3 to 1FEA3

10'

275' 276' 00344 to 1FF44 003A4 to 1FFA4

Each data block is 128 bytes long. The address increments by hex 0400 for each byte in a data block. The first byte sent to or from tape for both channels is stored in location 00000. The interleave buffer extends across both helical tracks in a principal block for each channel, thus the data block number "n" refers to the data block in the first helical track of the principal block and the data block number "n" denotes the data block number in the second helical track of the principal block.

6.16.9.2.3 <u>8 to 5 Conversion</u>. Data being moved from the interleave buffer to tape is read from the memory in 8-bit bytes and is immediately converted to 5-bit groups in preparation for modulation coding. During reproduction this conversion occurs in reverse fashion. The algorithm for conversion is detailed in Metrum Document Number 16829019.

6.16.9.2.4 Miscellaneous Information Inclusion. Each data block in the helical track includes one additional bit added to the data set prior to modulation coding. Each data block removed from the interleaved buffer memory consists of 128 bytes of ECC encoded user data totaling 1024 bits. Conversion from 8-bit bytes to 5 bit groups results in 204 groups plus 4 bits. A miscellaneous information bit is added to each data block as the 1025th bit to complete 205 full 5-bit groups. Miscellaneous information is currently defined only in the first helical track of each principal block. The remaining three helical tracks (1 in the E format) contain no defined miscellaneous bits and are reserved for future expansion. Any reserved miscellaneous information bits shall be recorded as 0 bits. The defined purposes of miscellaneous information bits in the first helical track of each principal block are

DATA BLOCK 1 to 20 inclusive MISCELLANEOUS BIT DEFINITION
First copy of 20-bit principal block number:
2s complement binary; least significant bit in data block 1; most significant bit in data block 20.

21 to 40 inclusive

Second copy of 20-bit principal block number: 2s complement binary; least significant bit in data block 21; most significant bit in data block 40. DATA BLOCK

MISCELLANEOUS BIT DEFINITION

41 to 60 inclusive

Third copy of 20-bit principal block number: 2s complement binary; least significant bit in data block 41; most significant bit in data

block 60.

61 to 76 inclusive

Volume label: 16-bit binary; least significant bit in data block 61; most significant bit in data block 76.

77 to 80 inclusive

Revision number: 4-bit code; value at time of writing is $0001 (1_h)$.

81 to 84 inclusive

4-bit tape information code as follows:

81 bit = 0 denotes all helical data was input as user digital data.

81 bit = 1 denotes input data stream to each channel. The ECC was 15 bytes of user digital data beginning with first byte plus 1 inserted byte from a different source in a repeating fashion. This bit must be uniformly set for the entire cartridge including the format zone. It is used to support mixing of digitized analog data into the digital stream and separation on reproduction.

- 82 bit = 0 denotes cartridge size is ST-120 for purposes of determining LEOT. This bit must be set for the entire cartridge including the format zone.
- 82 bit = 1 denotes cartridge size is ST-160 for purposes of determining LEOT. This bit must be set uniformly for the entire cartridge including the format zone.

DATA BLOCK

MISCELLANEOUS BIT DEFINITION

83 and 84 Reserved for additional tape information coding.

85 to 138 or 276 inclusive

Reserved for future expansion

6.16.9.2.5 Modulation Code. Data is encoded using a 5/6 modulation code that has a spectral null at dc. The coding algorithm employed has a code word digital sum (CWDS) maximum of ± 2 with a maximum run length of 6 bits. The 205 5-bit groups resulting from the 8 to 5 conversion (including the inserted miscellaneous bit) undergo this coding to form the final 5/6 code frames that are physically recorded in the data blocks of the helical track format. The algorithm for coding is detailed in Metrum Document Number 16829019.

6.17 <u>Multiplex/Demultiplex (MUX/DEMUX) Standards for Multiple Data</u> <u>Channel Recording on ½ Inch Digital Cassette (S-VHS) Helical Scan</u> <u>Recorder/Reproducer Systems.</u>

For recording and reproducing multiple channels on 1/2 Inch Digital Cassette (S-VHS) Helical Scan Recorders, the Asynchronous Real-time Multiplexer and Output Reconstructor (ARMOR) multiplex/demultiplex format is recommended. The ARMOR data format is an encoding scheme that may be used to multiplex multiple asynchronous telemetry data channels into a single composite channel for digital recording, transmission, and subsequent demultiplexing into the original constituent channels.

- 6.17.1 General. Data types supported by the ARMOR format are PCM, analog, decoded IRIG time, and 8-bit parallel. MIL-STD-1553 data is encoded into an IRIG 106 Chapter 8 serial PCM stream prior to multiplexing into the ARMOR format. Voice channels are encoded in the same way as all other analog channels. The composite channel is formatted into fixed bit-length, variable word-length frames. A constant aggregate bit rate and a fixed frame bit-length are established for each multiplex by an algorithm that is dependent on the number, type, and rate of the input channels. The aggregate bit rate and frame bit length result in a fixed frame rate for each multiplex. The ARMOR encoding scheme captures the phase of each input channel relative to the start of each composite frame. The demultiplexing process may then use the captured phase information to align the reconstruction of the constituent channels relative to a reproduced constant frame rate.
- 6.17.2 Setup Block Format. In addition to defining the organization of the frames containing the multiplexed data, the ARMOR format incorporates the definition of a "setup block" that contains the parameters necessary to demultiplex the associated data frames. The setup block is included in the composite stream at the start of each recording to preserve with the data the information necessary to decode the data. Appendix L defines the setup block format and content.

6.17.3 <u>Multiplexer Format.</u> The definition of the ARMOR multiplex format has two parts. The frame structure definition describes the organization of the composite data frame which changes from one multiplex to the next. The channel coding definition describes the encoded data word format for each data type, which is the same for all multiplexers.

	Ste	p 1		2	3			4		5			6		7
1	2	3	4			1	2		m		1	2		m	
	Sy	nc		Fil (or tii code)		PC Blo	M C		nel	Filler		AR C		nel	Filler

Figure 6-17. The steps of the build process.

6.17.3.1 Frame Structure. The sequence of steps used to establish the multiplexed frame structure, shown in Figure 6-17, is explained in Table 6-18 below. The process involves putting the sync, PCM, parallel (PAR), time code, and analog channels into a frame. The filler blocks may consist of either constant (hex FF) bytes or analog samples, depending upon the constituent input channel mix. The PCM Sample Start Bit Point and the Parallel Sample Start Bit Point are based on calculations of the master oscillator, pacer, and the bit rate of the slowest PCM and word rate of the slowest parallel channels respectively. The paper is a clock pulse that is programmed to a multiple of the fastest analog channel sample rate. These calculations assure that the first word of the slowest PCM channel or the first word of the slowest parallel channel are not placed too early in the composite frame. If necessary to satisfy these Start Bit Point calculations, filler in the form of analog channel words or hex FF, if no analog words are available, is used to force the first PCM or PAR word later in the composite frame. Compatibility with specific legacy versions of the format requires the use of the appropriate equations, which are embodied in a software program, refer to Calculex Part No. 199034-0002².

²Part Number 199034-0002, available from CALCULEX, Inc., P.O. Box 339, Las Cruces, NM 88004 or by email to info@calculex.com.

	lABLE (5-12. SCANLIST BUILD STEPS
		(Reference scanlist in Figure 6-17)
Step #1	Sync	The Sync is made up of four bytes of 8 bits totaling 32 bits: FE 6B 28 40
Step #2	Time Code	If time code exists, it is placed after the sync in three words of bit length 24, 24, and 16. Multiple time codes are placed in ascending hardware sequence, as identified in the setup block.
Step #3	Filler (PCM Start Bit)	If required, either filler or analog channels are placed next, depending on the calculation of the PCM Sample Start Bit Point. If no analog (or voice) channels are included in the multiplex, hex value "FF" filler is inserted in the frame as required to satisfy the PCM Sample Start Bit Point calculation. When analog channels are part of the multiplex, analog words are used in place of hex FF filler to minimize the formatting overhead.
Step #4	PCM Channels	The PCM channels are placed next in ascending order of speed with the slowest channel first. Multiple channels at the same speed are placed in ascending hardware sequence, as identified in the setup block.
Step #5	Filler (PAR Start Bit)	If required, either filler or analog channels are placed next, depending on the calculation of the PAR Sample Start Bit Point. If no analog (or voice) channels are included in the multiplex, hex FF filler is inserted in the frame as required to satisfy the PAR Sample Start Bit Point calculation. When analog channels are part of the multiplex, any remaining analog words that were not inserted in the frame at step 3 are used in place of hex FF filler to minimize the formatting overhead channel.
Step #6	PAR Channels	The PAR channels are placed next in ascending order of speed with the slowest channel first. Multiple channels at the same speed are placed in ascending hardware sequence, as identified in the setup block.
Step #7	Filler (Analog Channels)	All remaining analog words which have not been used for filler in steps 3 and 5 are placed next, followed by any additional filler required to satisfy the pacer divisor calculation.

6.17.3.2 <u>Pacer Divisor Calculation</u>. The number of analog samples per ARMOR frame for each analog channel must be evenly divisible into the number of bits per ARMOR frame. The initial bits per ARMOR frame are calculated to minimize the aggregate bit rate of the composite.

Filler is then added to satisfy the divisibility rule to set the pacer clock speed. This step is referred to as the pacer divisor calculation, since the pacer itself is derived from the same master oscillator as the aggregate bit rate clock.

6.17.3.3 <u>ARMOR Channel Coding.</u> Each input data channel is encoded into 8-, 12-, 16-, or 24-bit words, depending on the type of channel. The bit length of an ARMOR frame is always an integer multiple of eight, so 12-bit words must occur an even (multiple of two) number of times within each frame. The data within a frame is serially concatenated most significant bit first. Table 6-19, which is an example of an ARMOR frame with two analog, one parallel, four PCM, and one time code channel, is referenced in the following descriptions.

ALTERNATION OF THE PROPERTY OF	6-13. SAMPLE ARMO	R FRAME	
Frame Item	Description	Words/Frame	Bits/Word
Sync Pattern	X'FE6B2840'	1	32
Time Code Ch #1	Encoded Time	2	24
Time Code Ch #1	Encoded Time	1	16
Filler	X'FF'	7	8
PCM Ch #1	Encoded User Data	130	16
PCM Ch #2	Encoded User Data	162	16
PCM Ch #3	Encoded User Data	226	16
PCM Ch #4	Encoded User Data	321	16
Analog Ch #1	Encoded User Data	100	12
Analog Ch #2	Encoded User Data	20	12
Parallel Ch #1	Encoded User Data	2	16
Parallel Ch #1	Encoded User Data	260	.8

- 6.17.3.4 Sync Pattern. All ARMOR frames begin with the fixed 32-bit sync pattern hexadecimal FE6B2840.
- 6.17.3.5 <u>Time Code Channels.</u> When time code channels are present in an ARMOR multiplex, their data words always immediately follow the sync pattern or another time code channel. Time is encoded as 64 bits in two 24-bit words and one 16-bit word. Table 6-20 defines the individual bits of the time code words. The encoded time is the time at the start of the ARMOR frame.

D	Day Of Year
H	Hour of Day
M	Minutes past the Hour
S	Seconds past the Minute
MS	Milliseconds past the Second
HN	Hundreds of Nanoseconds past the Millisecond
SE	Sync Error (Time code decoding error)

NT 0

No Time Code (input signal detect fail) Always Zero

FIN			
DIT	WORD		WODDS
BIT		WORD2	WORD3
23	D9	0	
22	D8	S6	
21	D7	S5	
20	D6	S4	
19	.D5	S3	
18	D4	S2	
17	D3	S1	
16	D2	S0	
15	D1	SE	0
14	D0	NT	0 .
13	0	0	HN13
12	H5	- 0	HN12
11	H4	MS11	HN11
10	H3	MS10	HN10
9	H2	MS9	HN9
8	H1	MS8	HN8
7	H0	MS7	HN7
6	M6	MS6	HN6
5	M5	MS5	HN5
4	M4	MS4	HN4
3	M3	MS3	HN3
2	M2	MS2	HN2
1	M1	MS1	HN1
0	M0	MS0	HN0

6.17.3.6 <u>PCM Channels.</u> User PCM data is encoded into 16-bit words. The number of 16-bit words (per channel) in each frame is approximately two percent greater than the number required to store the user data during the frame time period. These overhead words are included to compensate for minor variations in user data clock rates. In order to record the number of allocated frame bits which actually contain user data, the first two 16-bit words are redundant copies of a bit count. In Figure 6-19, PCM Channel #1 has 130 words: two count words and 128 data words. The bit count in either one of the redundant count words records the number of bits in the 128 data words that are actually

user PCM data (most significant bit first). All remaining bits are filler. The first user data bit in the most significant bit location of the third channel word (the first data word following the redundant count words) was the first bit to be received after the start of qqthe ARMOR frame.

6.17.3.7 Analog Channels. Analog data is digitized into either 8-bit or 12-bit samples using offset binary notation (a sample of X'00' or X'000' is the largest negative value). No overhead words or bits are included with analog channel data because input sampling is synchronous to the start of the ARMOR frame. The first sample of each channel was captured at frame start time with all remaining samples evenly spaced throughout the frame time. Note that the location of the analog channel words within the composite ARMOR frame has no correlation with the time between the start and end of the frame when the analog samples were captured (digitized). The first sample of the 100 Analog Channel #1 words and the first sample of the 20 Analog Channel #2 words in Figure 6-19 were both captured (digitized) at the same instant in time, which was the frame start time. Voice is a special case of an analog channel in that it is always 8-bit samples.

6.17.3.8 <u>Parallel Channels</u>. The encoding of parallel input channels is very similar to PCM encoding. Approximately two percent more than the minimum number of words necessary to store the user data during one ARMOR frame period are allocated to each parallel channel. The first two 16-bit words of each channel are redundant count words that record the actual number of allocated data words that contain user data. The remaining allocated words contain filler. Figure 6-19 has two entries for Parallel Channel #1. The first entry shows the two (redundant) 16-bit count words and the second entry shows the number of allocated 8-bit data words for the channel. The number of 8-bit data words that contain user data is determined by examining either of the two count words. The first data word for each parallel channel was the first word received after the start of the ARMOR frame.

6.17.4 ARMOR Format Compatibility. Compatibility with the ARMOR format can be divided into two distinct cases. In the first case, the user is playing back a legacy tape (made with legacy multiplexer hardware and software) on non-legacy demultiplexer hardware and software. In the second case, the user is creating a tape on non-legacy multiplexer hardware and software for future playback by legacy demultiplexer hardware and software.

In the first case, the legacy tape contains a setup block (see Section 6.17.2 above) at the start of the recording. The setup block contains the information necessary for the user to demultiplex the data records on the tape. The bit rate field in the setup block header section specifies the rate at which the legacy recording was generated. The saved scanlist field in the setup block trailer section specifies the exact sequence and size of the sync, data, and filler words in the recording.

In the second case, the user must first generate an ARMOR setup block at the start of the recording. Subsequent data records must then be formatted in accordance with the specification in the setup block. Setup Block creation is described in appendix L.

6.17.5 ARMOR Format Validation. The CALCULEX, Inc. ARMOR Format Verification Program (AFVP) may be used to determine if an independently generated multiplex is compatible with existing legacy hardware. The AFVP reads the setup block (see Section 6.17.2. above) from the data set under test and validates the data set frame structure. Please refer to IRIG 118, Vol III. The AFVP may be obtained from CALCULEX.³

³ Part Number 198007-0001 may be obtained from CALCULEX, Inc. P.O. Box 339, Las Cruces, NM 88004 or by email request to info@calculex.com.

CHAPTER 7

MAGNETIC TAPE STANDARDS

7.1 General

These standards define terminology, establish key performance criteria, and reference test procedures for longitudinally-oriented oxide, unrecorded magnetic tape designed for instrumentation recording¹, and reference specifications for 19 mm (0.75 in) cassettes designed for digital helical scan recording and S-VHS cassettes designed for 12.65 mm (1/2 in) digital helical scan recording. Classes of instrumentation recording tapes include High Resolution (HR) tapes used for wide band recording, High Density Digital (HDD) tapes used for high density digital PCM recording, and High Energy (HE) tapes used for double density recording. Coercivities of HR and HDD tapes are in the range of 275 to 350 oersteds. High energy tapes have coercivities of 600 to 800 oersteds. Nominal base thickness is 25.4 Tm (1.0 mil) and nominal coating thickness is 5 Tm (200 microinches) for all tapes. Where required, limits are specified to standardize configurations and to establish the basic handling characteristics of the tape. Limits placed on the remaining requirements must be determined by the tape user in light of the intended application and interchangeability requirements imposed on the tape (see table 7-4 for examples of suggested requirement limits).

7.2 Definitions

Underlined terms appearing within definitions indicate that these terms are defined elsewhere in paragraph 7.2. For the purpose of this standard, the following definitions apply.

- 7.2.1 <u>Back Coating</u>. A thin coating of conductive material (for example, carbon) bonded to the surface of a magnetic tape opposite the magnetic-coated surface for reducing electrostatic charge accumulation and for enhancing high-speed winding uniformity. Resistivity of the back coating should be 1 megohm per square or less, whereas the oxide-coated magnetic surface resistivity is much higher (also see magnetic oxide coating).
- 7.2.2 <u>Base</u>. The material on which the <u>magnetic oxide coating</u> (and <u>back coating</u>, if employed) is applied in the manufacture of magnetic tapes. For most applications, polyester-base materials are currently employed.

¹Federal Specifications W-T-1553A and W-R-175 may be used to replace paragraphs contained in this chapter where applicable. High output and HDD tapes are not included in the Federal Specifications. Other standards are referenced in paragraph 1.0, appendix D.

- 7.2.3 <u>Bias Level</u>. The level of high frequency ac bias current or voltage in a direct record system needed to produce a specified level of an upper band edge (UBE) frequency sine-wave signal at a particular tape speed. Usually adjusted to produce maximum output or increased beyond maximum to depress the output 2 dB.
- 7.2.4 <u>Bi-Directional</u>. Ability of a magnetic tape to record and to reproduce a specified range of signals within specified tolerances of various characteristics when either end of the tape on the reel is used as the leading end.
- 7.2.5 <u>Binder</u>. Material in which the magnetic oxide particles or <u>back-coating</u> particles are mixed to bond them to the <u>base</u> material.
- 7.2.6 <u>Blocking</u>. Failure of the magnetic coating to adhere to the <u>base</u> material because of layer-to-layer adhesion in a wound tape pack.
- 7.2.7 <u>Center Tracks</u>. On a recorded tape, center tracks are those which are more than one track distance from either edge of the tape, for example, tracks 2 through 13 of a 14-track tape or tracks 2 through 27 of a 28-track tape.
- 7.2.8 <u>Dropout</u>. A reproduced signal of abnormally low amplitude caused by tape imperfections severe enough to produce a data error. In digital systems, dropouts produce bit errors.
- 7.2.9 Edge Tracks. The data tracks nearest the two edges of a recorded magnetic tape, for example, tracks 1 and 14 of a 14-track tape.
- 7.2.10 <u>Erasure</u>. Removal of signals recorded on a magnetic tape to allow reuse of the tape or to prevent access to sensitive or classified data. Instrumentation recorders and reproducers do not usually have erase heads, so bulk erasers or degaussers must be employed.
- 7.2.11 <u>E-Value</u>. The radial distance by which the reel flanges extend beyond the outermost layer of tape wound on a reel under a tape tension of 3.33 to 5.56 newtons (12 to 20 ounces of force) per inch of tape width. Inadequate E-value may prohibit the use of protective reel bands.
- 7.2.12 <u>High-Density Digital Magnetic Tape</u>. Instrumentation magnetic tape with nominal base thickness of 25.40 Tm (1 mil) and coercivity of 275 to 350 oersteds used to record and reproduce high-density digital (PCM) signals with per-track bit densities of 590 b/mm (15 kb/in.) or greater.
- 7.2.13 <u>High-Energy Magnetic Tape</u>. Magnetic tapes having coercivity of 600 to 800 oersteds and nominal base thickness of 25.4 Tm (1 mil) used for double density analog recording and high-density digital recording above 980 b/mm (25 kb/in.).

- 7.2.14 <u>High-Resolution Magnetic Tape</u>. Instrumentation magnetic tape used for recording on wide band recorder and reproducer systems. The HR and <u>HDD tapes</u> may have identical coatings and coercivities (275 to 350 oersteds) but differ in the extent and type of testing conducted by the manufacturer.
- 7.2.15 <u>Layer-to-Layer Signal Transfer (Print Through)</u>. Transfer of a signal to a layer of a wound magnetic tape originating from a signal recorded on an adjacent layer of tape on the same reel. Saturation-level recorded signals and tape storage at elevated temperatures are likely contributors to this effect.
- 7.2.16 <u>Magnetic Oxide Coating</u>. Material applied to a <u>base</u> material to form a magnetic tape. The magnetic oxide coating contains the oxide particles, the <u>binder</u>, and other plasticizing and lubricating materials necessary for satisfactory operation of the magnetic tape system (also see <u>back coating</u>).
- 7.2.17 <u>Manufacturer's Centerline Tape</u>. A tape selected by the manufacturer from his production, where the electrical and physical characteristics are employed as reference standards for all production tapes to be delivered during a particular contractual period. Electrical characteristics include, but are not limited to, bias level, record level, output at 0.1 <u>UBE</u>, and wavelength response. The MCTs are not usually available for procuring agency use.
- 7.2.18 <u>Manufacturer's Secondary Centerline Tape</u>. A tape selected by a manufacturer from his production and provided in lieu of an MCT. On the MSCT, the electrical characteristics may depart from the MCT characteristics, but calibration data referenced in the MCT are provided. All other characteristics of the MSCT are representative of the manufacturer's product.
- 7.2.19 <u>Modulation Noise</u>. Noise riding on a reproduced signal that is proportional to the amplitude of the recorded signal (below saturation) and results from tape-coating irregularities in particle size, orientation, coercivity, and dispersion.
- 7.2.20 <u>Record Level</u>. The level of record current or voltage required to achieve a specified reproduce output level with <u>bias level</u> previously set to the correct value. In direct record systems, standard record level is the level of a 0.1 <u>UBE</u> frequency signal required to produce 1 percent third harmonic distortion in the reproduced output signal because of tape saturation.
- 7.2.21 <u>Scatterwind</u>. Lateral displacements of tape wound on a reel which gives an irregular appearance to the side surfaces of a tape pack. Scatterwind can result from such things as poorly controlled tape tension, guiding, static electrical charge, and poor tape slitting.
- 7.2.22 <u>Shedding</u>. Loss of magnetic coating from tape during operation on a tape transport. Excessive shedding causes excessive <u>dropout</u>.

- 7.2.23 <u>Short Wavelength Output Uniformity</u>. A measure of high-frequency reproduce signal amplitude uniformity caused by oxide coating variations.
- 7.2.24 <u>Upper Band Edge</u>. The highest frequency that can be recorded and reproduced at a particular tape speed in the direct record mode. The UBE signals are used in setting <u>bias level</u>; 0.1 UBE signals are used to set <u>record level</u>.
- 7.2.25 <u>Wavelength Response</u>. The record and reproduce characteristic of a magnetic tape which depends on tape formulation, coating thickness, and other tape physical parameters and is a function of the wavelength recorded on the tape (tape speed divided by signal frequency) rather than the actual frequency recorded.
- 7.2.26 Working Length. Length of tape usable for reliable recording and reproduction of data. Actual tape length on a reel exceeds the working length to provide for tape start and stop at each end of the reel without loss of data.
- 7.2.27 Working Reference Tape. A tape or tapes of the same type as an MCT or MSCT selected by the user and calibrated to the MCT or MSCT. The working reference tapes (WRT) are employed in conducting tests on tape types during a procurement activity and for aligning and testing recorder and reproducer systems to minimize running the MCT or MSCT.

7.3 General Requirements for Standard Instrumentation Tapes and Reels

The following subparagraphs describe the requirements for tapes and reels.

- 7.3.1 <u>Reference Tape System</u>. To establish a set of test procedures which can be performed independently and repeatably on different manufacturers' tape transports, a centerline reference tape system employing <u>Manufacturer's Centerline Tapes</u> (MCT), <u>Manufacturer's Secondary Centerline Tapes</u> (MSCT) or <u>Working Reference Tapes</u> (WRT) as required, should be used. The reference tape system provides a centerline tape against which tape or tape recorder specifications may be tested or standard tapes for aligning operational recorders.
- 7.3.1.1 <u>Manufacturer's Centerline Tape</u>. The electrical characteristics provided for a manufacturer's centerline tape include, but are not limited to, <u>bias level</u>, <u>record level</u>, <u>wavelength response</u>, and output at 0.1 UBE wavelength. The physical characteristics of the MCT shall also represent the manufacturer's production and shall be representative of all production tape delivered during any resultant contractual period (see subparagraph 7.2.17).
- 7.3.1.2 <u>Manufacturer's Secondary Centerline Tape</u>. On the MSCT, the electrical characteristics are calibrated to the manufacturer's reference tape, and calibration data are supplied with the MSCT. The physical characteristics of the MSCT shall represent the manufacturer's production (see subparagraph 7.2.18).

7.3.1.3 Working Reference Tape. Working reference tapes shall be of the same type as those under procurement or test and shall be used in place of a MCT or MSCT for all applicable test procedures (see subparagraph 7.2.27).

NOTE

The MCT or MSCT shall be a full-length tape of 25.4 mm (1 in.) width, wound on a 266.7 mm (10 1/2 in.) or 355.6 mm (14 in.) reel or as designated by the tape user. The center one-third of the working tape length shall be used as the calibrated working area.

- 7.3.1.4 Test Recorder and Reproducer. A laboratory quality test recorder shall be designated for use with the reference tape system during any magnetic tape procurement and test program. The recorder selected shall meet the requirements in chapter 6.
- 7.3.1.5 MCT/MSCT/WRT Use. Using MCT or MSCT as a reference, the tape user performs all tests necessary to determine if the manufacturer's centerline performance values meet operational and recorder requirements. All acceptable centerline tapes are retained by the tape user as references in subsequent acceptance test procedures performed in support of resultant contracts or contractual periods. A working reference tape, which has been calibrated to an MCT or MSCT, is used as the actual working reference in the applicable testing procedures outlined in volume III, RCC document 118. Dropout tests should use a tape other than the MSCT or WRT.
- 7.3.2 Marking and Identifying. See Federal Specification W-T-1553A.
- 7.3.3 Packaging. Specified by user.
- 7.3.4 Winding. The tape shall be wound on the reel or hub with the oxide surface facing toward the hub ("A" wind). The front of the wound reel is defined as that flange visible when viewing the tape reel with the loose end of the tape hanging from the viewer's right.
- 7.3.5 Reels and Hubs. Reels and hubs shall conform to the tape user specified requirements of Federal Specification W-R-175 (also see appendix D).
- 7.3.6 Radial Clearance (E-Value). For all tape lengths, use 3.175 mm (0.125 in.) (see subparagraph 7.2.11).
- 7.3.7 Flammable Materials. Flammable materials shall not be a part of the magnetic tape. Flammable materials will ignite from a match flame and will continue to burn in a still carbon dioxide atmosphere.
- 7.3.8 Toxic Compounds. Compounds which produce toxic effects in the environmental conditions normally encountered under operating and storing conditions as defined in subparagraph 7.4.2 shall not be part of the magnetic tape. Toxicity is defined as the

property of the material which has the ability to do chemical damage to the human body. Highly toxic or corrosive compounds produced under conditions of extreme heat shall be identified and described by the manufacturer.

7.4 General Characteristics of Instrumentation Tapes and Reels

The following subparagraphs describe the general characteristics for tapes and reels.

7.4.1 <u>Dimensional Specifications</u>. Magnetic tape shall be supplied on flanged reels in the standard lengths, widths, and base thicknesses outlined in table 7-1. Reel and hub diameters are taken from Federal Specification W-R-175.

TABLE 7-1. TAPE DIMENSIONS			
Tape Width	millimeters	<u>inches</u>	
	25.4 +0 -0.10	1.000 +0 -0.004	
Tape Thickness	millimeters inches		
Base Material	0.025 0.0010	Nominal ¹	
Oxide Thickness	0.005 0.0002	Nominal	
Tape Length by Reel Diameters (reels with 76 mm (3 in.) center hole)			
Reel Diameter	Nominal Tape Length ²	Minimum True Length ³	
266 mm (10.5 in.)	1100 m (3600 ft)	1105 m (3625 ft)	
11 11 11 11	1400 m (4600 ft)	1410 m (4625 ft)	
356 mm (14.0 in.)	2200 m (7200 ft)	2204 m (7230 ft)	
" " " "	2800 m (9200 ft)	2815 m (9235 ft)	
381 mm (15.0 in.)	3290 m (10 800 ft)	3303 m (10 835 ft)	
408 mm (16.0 in.)	3800 m (12 500 ft)	3822 m (12 540 ft)	

¹ Actual tape base material thickness slightly less because of manufacturing conventions.

²Original dimensions are in feet. Metric conversions are rounded for convenience.

³Tape-to-flange radial clearance (E-value) is 3.18 mm (0.125 in.).

- 7.4.2 Environmental Conditions. The tape shall be able to withstand, with no physical damage or performance degradation, any natural combination of operating or nonoperating conditions as defined in subparagraphs 7.4.2.1 and 7.4.2.2.
- 7.4.2.1 Tape Storing Conditions. Magnetic tape is subject to deterioration at temperature and humidity extremes. In some cases the damage is reversible, but irreversible damage may occur, especially with long-term storage in unfavorable conditions.

7.4.2.2 Operating Environment. Recommended limits:

Condition Range

Temperature:

4 to 30 °C (40 to 85 °F)

Humidity:

20 to 60 percent relative humidity (RH)

noncondensing

Pressure:

Normal ground or aircraft operating altitude pressures. For very high altitudes, tape users should consult with manufacturers to determine if tape and recorder compatibility is affected by

low atmospheric pressure.



- (1) Binder/oxide system tends to become sticky and unusable above 50 °C (125 °F).
- (2) At low humidities, tape binder and oxide system tends to dry out, and oxide and binder adhesion can be unsatisfactory. Brown stains on heads may appear below 40 percent RH.
- (3) At high humidities, abrasivity is increased and other performance problems may arise.
- 7.4.2.3 Non-operating Environment. Temperature and Relative Humidity.

Short Term - 0 to 45 °C (32 to 115 °F) and 10 to 70 percent RH noncondensing

Long Term - 1 to 30 °C (33 to 85 °F) and 30 to 60 percent RH noncondensing



Experience has shown that with long exposure to temperatures below freezing, lubricants and plasticizers tend to migrate out of the oxide coating resulting in poor lubrication and gummy surface deposits.

7.4.3 Other Characteristics. Storage life, bi-directional performance, frictional vibration, and scatterwind characteristics shall conform to Federal Specification W-T-1553[SH] unless otherwise specified by the tape user at the time of purchase.

7.5 Physical Characteristics of Instrumentation Tapes and Reels

As specified in Federal Specification W-T-1553A and W-R-175.

7.6 Instrumentation Tape Magnetic and Electrical Characteristics

The following subparagraphs describe required magnetic and electrical tape characteristics.

- 7.6.1 <u>Bias Level</u>. The bias level (see subparagraph 7.2.3) required by the magnetic tape shall not differ from the bias level requirements of the reference tape by more than the amount specified by the tape user. The test procedure outlined in subparagraph 7.3.1, Bias Level, volume III of RCC document 118 shall be used to determine compliance with this requirement.
- 7.6.2 <u>Record Level</u>. The record level (see subparagraph 7.2.20) required by the magnetic tape shall not differ from the record level requirements of the reference tape by more than the amount specified by the tape user. The test procedure outlined in subparagraph 7.3.2, Record Level, volume III of RCC document 118 shall be used to determine compliance with this requirement.
- 7.6.3 Wavelength Response. The output of the magnetic tape, measured at the wavelength values listed in table 7-2, Measurement Wavelengths, shall not differ from the output of the reference tape by more than the amounts specified by the tape user. Wavelength response requirements shall be specified in terms of output after having normalized the output to zero decibels at the 0.1 UBE wavelength. The test procedure outlined in subparagraph 7.3.3, Wavelength Response and Output at 0.1 Upper Band Edge Wavelength, volume III of RCC document 118 shall be used to determine compliance with this requirement (see table 7-4A, Suggested Wavelength Response Requirements).

<u> High-Resolutio</u>	n and HDD Tape	High-Ene	ergy Tape
<u>Tm</u>	(mils)	<u>Tm</u>	(mils)
3810.00	(150.000)	254.00	(10.000)
254.00	(10.000)	25.40	(1.000
25.40	(1.000)	12.70	(0.500
6.35	(0.250)	6.35	(0.250
3.18	(0.125)	3.18	(0.125
2.54	(0.100)	2.54	(0.100
2.03	(0.080)	1.52	(0.060
1.52	(0.060)	1.02	(0.040
	ester?	0.76	(0.030

- 7.6.4 Output at 0.1 UBE Wavelength. The wavelength output of the magnetic tape shall not differ from the 0.1 UBE wavelength of the reference tape by more than the amount specified by the tape user. The test procedure outlined in subparagraph 7.3.3, Wavelength Response and Output at 0.1 Upper Band Edge Wavelength, volume III of RCC document 118 shall be used to determine compliance with this requirement.
- 7.6.5 Short Wavelength Output Uniformity. The short wavelength output of the magnetic tape shall be sufficiently uniform that a signal recorded and reproduced throughout the working tape length in either direction of longitudinal tape motion shall remain free from long-term amplitude variation to the extent specified by the tape user. The test procedure outlined in subparagraph 7.3.4, Short Wavelength Output Uniformity, volume III of RCC document 118 shall be used to determine compliance with this requirement.
- 7.6.6 <u>Dropouts</u>. The instantaneous nonuniformity (dropout) output of a recorded signal, caused by the magnetic tape, shall not exceed the center-track and edge-track limits specified by the tape user on the basis of dropouts per 30.48 m (100 ft.) of nominal working tape length. The nominal dropout count shall be determined by totaling all the dropouts per track over the working tape length and dividing by the total number of 30.48 m (100 ft.) intervals tested.

A second method of specifying the allowable dropout count is to specify the maximum number per track for each 30.48 m (100 ft.) interval tested. This method may be preferred if critical data is recorded in specific areas of the working tape length, but a specified number of dropouts per hundred feet greater than the average values may be expected.



Dropout test results are very dependent on the tape transport used for the test and will vary from run to run on a given transport. Edge tracks tend to contain more dropouts than the center tracks, and more dropouts are allowed on the edge

tracks. Refer to table 7-4.

7.6.6.1 For High Resolution (HR) tapes, a dropout is defined as a 6 dB reduction in amplitude for a period of 5 microseconds or more of a 1 MHz sine-wave signal recorded and reproduced at a tape speed of 3048 mm/s (120 ips). Signal losses of 6 dB or more which exceed the 5 microsecond time period shall constitute a dropout count for each 5 microsecond time period occurring in the given signal loss. Track definitions are given in subparagraphs 7.2.7 and 7.2.9. The test procedure outlined in subparagraph 7.1.3.3, volume III of RCC document 118 shall be used to determine compliance with this requirement.

7.6.6.2 For High Density Digital (HDD) tapes, a dropout is defined as a 10 dB or greater reduction in amplitude for a period of 1 microsecond or more of a square-wave test signal of maximum density recorded and reproduced at 3048 mm/s or 1524 mm/s (120 ips or 60 ips). On at least every other track (7 tracks of the odd head on a 28-track head assembly (alternatively, every other track of the even head) record and reproduce a square-wave test signal of 2 MHz at 3048 mm/s (120 ips) or 1 MHz at 1524 mm/s (60 ips). The record level shall be set slightly above saturation by adjusting the record current to produce maximum reproduce output and increasing the record current until the output signal is reduced to 90 percent of maximum. For playback, a reproduce amplifier and a threshold detector shall be used. The signal-to-noise ratio of the test signal at the input to the threshold detector shall be at least 25 dB, and the detector shall detect any signal loss of 10 dB or more below reference level. The reference level shall be established by averaging the test signal output level over a 10 m (30.8 ft.) nominal tape length in the vicinity of a dropout.

7.6.6.3 For each of the seven tracks tested, the accumulated duration in microseconds of detected dropout events shall be displayed and used to directly display the dropout rate for each track scaled appropriately for the tape working length. Signal losses of 10 dB or more which exceed the 1 microsecond time period shall constitute a dropout count for each microsecond time period occurring in the given signal loss.

7.6.6.4 For high-energy tapes, a dropout is defined as for high-resolution tapes except that a 2 MHz signal is used.

7.6.7 <u>Durability</u>. The magnetic tape shall resist deterioration in magnetic and electrical performance because of wear to the coating surface. Signal losses, as defined below, caused by surface wear shall not occur in excess of the per-pass limits specified in table 7-3 for the first 35 passes.

Signal losses in excess of those limits specified above shall not occur during either a record, record and reproduce or uninterrupted reproduce pass of the working tape length. Signal loss is a reduction in signal amplitude of 3 dB or greater for a time period of 3 through 10 seconds of a recorded and reproduced short wavelength signal. Where a continuous loss of signal of 3 dB or greater exceeds the 10-second time period, a signal loss count shall be required for every sequential 10-second time period occurring in the given signal loss. The test procedure outlined in subparagraph 7.3.6, Durability, volume III of RCC document 118 shall be used to determine compliance with this requirement.

7.6.8 Modulation Noise. The amplitude modulation superimposed upon a recorded and reproduced signal by the magnetic tape shall not exceed the limits specified by the tape user. The test procedure outlined in subparagraph 7.3.7, Modulation Noise, volume III of RCC document 118 shall be used to determine compliance with this requirement.

7.6.9 <u>Layer-to-Layer Signal Transfer</u>. A signal resulting from layer-to-layer signal transfer shall be reduced in amplitude from the original signal a minimum of 40 dB for 25.4 Tm (1.0 mil) tape and 46 dB for 38.1 Tm (1.5 mils) tape. The test procedure outlined in subparagraph 7.3.8, Layer-to-Layer Signal Transfer, volume III of RCC document 118 shall be used to determine compliance with this requirement.

TABLE 7-3. DURABILITY SIGNAL LOSSES			
Designate	ed Tape	Number of Allowable Signal Losses	
Leng	<u>gth</u>	(per pass)	
<u>meters</u>	<u>Feet</u>		
762	(2500)	2	
1097	(3600)	2	
1402	(4600)	2	
1524	(5000)	2	
2195	(7200)	3	
2804	(9200)	3	
3292	(10 800)	4	

TABLE 7-4. SUGGESTED TAPE REQUIREMENT LIMITS

Par. No.	Tape Requirement	9	Suggested Limits	
7.6.1	Bias Level	±2.0 dB from MCT		Γ
7.6.2	Record Level	±;	2.0 dB from MC	Γ
7.6.3	Wavelength Response (See table 7-4A.)			
7.6.4	Output at 0.1 UBE Wavelength	1	.5 dB from MCT	,
7.6.5	Short Wavelength Output Uniformity		Tape HE Tape 5 dB 2.5 c	
7.6.6	Dropouts per 30 m (100 ft) (average)	Center	Tracks Edge	Tracks
		5	HR Tape	10
		1	HDD Tape	1
		20	HE Tape	30
7.6.7	Durability (See table 7-3.)			
7.6.8	Modulation Noise		1 dB maximum	

TABLE 7-4A. SUGGESTED WAVELENGTH RESPONSE REQUIREMENTS

HR AND HDD TAPE

Measurement '	Wavelength	HR Response (dB)	HDD Response (dB)
<u>Tm</u>	mils		
3810.00	(150.000)	1.00	2.00
254.00	(10.000)	1.00	1.00
15.14	(0.600)	0.00	0.00
6.35	(0.250)	1.50	1.50
3.18	(0.125)	2.00	2.00
2.54	(0.100)	2.50	2.50
2.03	(0.080)	2.50	2.50
1.52	(0.060)	3.00	3.00
	` ,		

HIGH-ENERGY TAPE

Measurement Wavelength		HE Wavelength Response (dB)
<u>Tm</u>	mils	
25.40	(1.000)	2.00
12.70	(0.500)	2.00
7.62	(0.300)	0.00
3.18	(0.125)	2.50
1.52	(0.060)	2.50
1.02	(0.040)	3.00
0.76	(0.030)	3.50
	1	•

- 7.6.10 Erasure Ease. For HR and HDDR tapes, an erase field of 79.58 kA/M (1000 oersteds) shall effect at least a 60 dB reduction in output amplitude of a previously recorded 25.4 Tm (1.0 mil) wavelength signal. For HE tapes, an erase field of 160 kA/m (2000 oersteds) shall effect at least a 60 dB reduction of a previously recorded 25.4 Tm (1.0 mil) wavelength signal. The test procedure outlined in subparagraph 7.3.9, Ease of Erasure, volume III of RCC document 118 shall be used to determine compliance with this requirement.
- 7.6.11 <u>Suggested Tape Requirement Limits</u>. Table 7-4 lists some suggested limits to be used for instrumentation tape.

7.7 General Requirements for 19-mm Digital Cassette Helical Scan Recording Tape and Cassettes

- 7.7.1 <u>Magnetic Tape</u>. The magnetic tape shall meet the requirements of MML Document 94-1, <u>Specification for Rotary Instrumentation Magnetic Recording Tape</u>, 19-millimeter (0.75 inch) Wide, 68 KA/M (850 Oersteds)¹.
- 7.7.2 <u>19-mm Cassettes</u>. The recorder/reproducers shall be capable of using 19 mm cassettes that conform to the physical dimensions of medium and large cassettes as defined in SMPTE 226M².

7.8 <u>General Requirements for 1/2-Inch Digital Cassette Helical Scan Recording</u> Tape and <u>Cassettes</u>

- 7.8.1 <u>Magnetic Tape</u>. The magnetic tape shall meet the requirements of MML Document 93-1, <u>Specification for Rotary Instrumentation Magnetic Recording Tape</u>, 12.65 millimeter (0.5 inch), 68 KA/M (850 Oersteds)³.
- 7.8.2 <u>1/2-Inch Cassettes</u>. The recorder/reproducers shall be capable of using 1/2-inch cassettes that conform to the physical dimensions as defined in ANSI V98.33M-1983⁴. To ensure crossplay compatibility, the T-160 (327 meters, min.) is recommended.

¹ MML Document 94-1 is available from the Naval Air Warfare Center Aircraft Division, Warminster, Pennsylvania 18974-0591.

² SMPTE 226M is available from the Society of Motion Picture and Tele-vision Engineers, 595 West Hartdale Avenue, White Plains, New York 10607.

³ MML Document 93-1 is available from the Naval Air Warfare Center, Aircraft Division, Warminster, Pennsylvania 18974-0591.

⁴ ANSI V98.33M-1983 is available from American National Standards Institute, 1430 Broadway, New York, New York 10018.

CHAPTER 8

MIL-STD-1553 ACQUISITION FORMATTING STANDARD

8.1 General

This standard addresses the acquisition of all the traffic flowing on MIL-STD-1553 type data buses. The formats described permit up to eight data buses within a single system. Other constraints such as RF bandwidth and tape recording time will dictate the actual number of buses processed by a single system. Standards for both composite (telemetry) and tape recorder formats are presented.

Although specifically designed to satisfy the requirements of 100 percent MIL-STD-1553 bus acquisition, the formatting provisions of this standard may be used in other applications when the data source and content are similar enough to permit easy adaptation. Users should contact the appropriate range to ensure any adaptations are compatible with that range.

8.2 Definitions

- 8.2.1 <u>Bus Monitor</u>. The terminal assigned the task of receiving bus traffic and extracting all information to be used at a later time.
- 8.2.2 <u>Data Bus</u>. All hardware including twisted shielded pair cables, isolation resistors, and transformers required to provide a single data path between the bus controller and all the associated remote terminals.
- 8.2.3 <u>Dual Redundant Data Bus</u>. The use of two data buses to provide multiple paths between the subsystems.
- 8.2.4 Bus Loading. The percentage of time the data bus is active.
- 8.2.5 <u>Maximum Burst Length</u>. The maximum length of a continuous burst of messages with minimum length message gaps.
- 8.2.6 <u>Bus Error</u>. Conditions detected which violate the definition of MIL-STD-1553 word structure. Conditions such as synchronization, Manchester, parity, noncontiguous data word, and bit count/word errors are all considered word type errors. System protocol errors, for example, incorrect word count/message and illegal mode codes, are not considered bus errors.

8.3 Source Signal

The source of data is a signal conforming to MIL-STD-1553. Format provisions are made for a dual redundant data bus system per bus. The interface device performing the data acquisition shall be configured as a bus monitor. Figure 8-1 depicts in block diagram form the concept of 100 percent MIL-STD-1553 bus data acquisition.



In the design of the interface to the MIL-STD-1553 bus, it may be necessary to include buffers to prevent loss of data and to conserve bandwidth. The buffer size is influenced by bus loading, maximum burst length, output bit rate, tape recording speed, time tagging, and

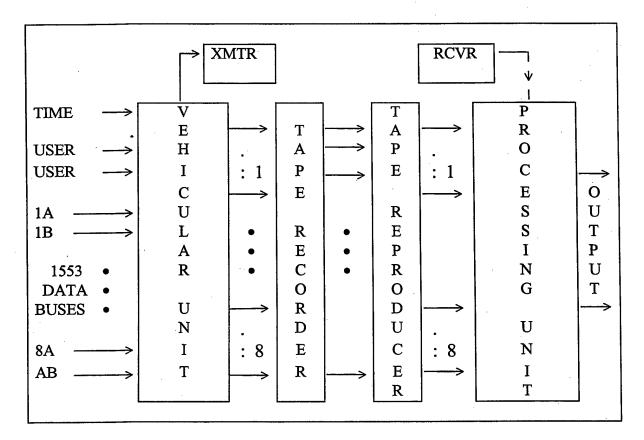


Figure 8-1. System block diagram.

8.4 Word Structure

The following subparagraphs describe the general word structure to be used for the formatted output.

8.4.1 The formatted data shall be a 24-bit word constructed as shown in figure 8-2(a).

- 8.4.2 The information extracted from the data bus shall have the synchronization pattern and parity bit removed.
- 8.4.3 Each incoming MIL-STD-1553 word (Command, Status or Data), auxiliary input or time word shall be appropriately labeled with a 4-bit content identifier label as described in figure 8-2(c).
- 8.4.4 Data extracted from the MIL-STD-1553 bus shall maintain bit order integrity in the information field for a command, status, data, and error word. Bit position four in the MIL-STD-1553 bus word shall be placed in bit position nine in the formatted data word. The remaining bits of the MIL-STD-1553 bus word shall be placed in successive bit positions in the formatted data word. Transposing or reordering of the bits is not permitted.
- 8.4.5 Each word shall also carry a 3-bit bus identifier label as shown in figure 8-2(b).
- 8.4.6 An odd-parity bit generated for the resulting formatted data shall be the most significant bit as shown in figure 8-2(a).
- 8.4.7 Fill words, required to maintain continuous data output, shall have 1010 1010 1010 1010 (AAAA hex) as the information bit pattern.
- 8.4.8 For bus errors defined in paragraph 8.2.6 (Error A 1100 or Error B 1000), the synchronization pattern and the parity bit are removed as stated in subparagraph 8.4.2. The information bits, 9 through 24, of the formatted word shall contain the resulting 16-bit pattern extracted from the bus.
- 8.4.9 The buffer overflow tag (0000) and appropriate bus identification tag shall be appended to the first word placed into the buffer <u>after</u> the buffer becomes available for data storage. This word should be an "extra" word, not the next available piece of data. Bits 9 through 24 are available for system level diagnostics and are not specified here. Tagging in this manner marks the point of data discontinuity and preserves the integrity of the next piece of data.

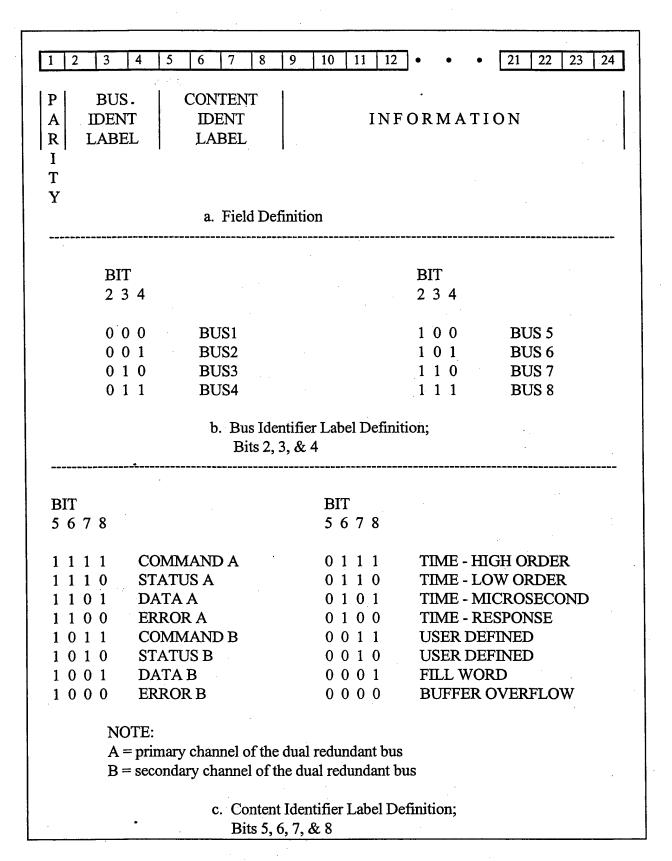


Figure 8-2. Word Construction.

8.5 Time Words

The following subparagraphs describe the structure and use of time words within the formatted output.

- 8.5.1 There shall be four words dedicated to providing timing information. Three of these words are defined in subparagraphs 4.7.1 through 4.7.4 and figure 4-3. They are designated as high order time, low order time, and microsecond time. The optional, fourth-time word, designated-response time, has the same structure as the microsecond time word (subparagraph 4.7.2). The structure shall follow the 16-bit per word format shown in figure 4-3 and be placed into bits 9 through 24.
- 8.5.2. If time tagging of the occurrence of MIL-STD-1553 messages is necessary to satisfy user requirements, the first command word of the message shall be time tagged. The time words shall immediately follow the first command word in the following order: high order time, low order time, and microsecond time.
- 8.5.3 The optional response time word shall have 1 microsecond resolution and shall indicate the response time of the data bus. The response time word shall immediately precede the status word associated with it.



If the response time function is not used, the identifier label 0100 may be assigned to user defined inputs.

8.6 Composite Output

The following subparagraphs describe the characteristics for a singular composite output signal.

- 8.6.1 The composite, continuous output shall conform to the requirements for pulse-code modulation as stated in chapter 4.
- 8.6.2 The data shall be transmitted or recorded most significant bit first.
- 8.6.3 The bit rate is dependent on several factors including bus loading and auxiliary inputs and shall be sufficient to preclude any loss of data.
- 8.6.4 The order of bus words must remain unaltered except in the case of a buffer overflow.
- 8.6.5 The frame length shall be fixed using fill words as required and shall be ≥ 128 words and ≤ 256 words including the frame synchronization word.

- 8.6.6 The frame synchronization word shall be fixed and 24 consecutive bits in length. The pattern, also shown in table C-1, appendix C, is 1111 1010 1111 0011 0010 0000 (FAF320 hex).
- 8.6.7 A frame structure employing frame time is recommended but optional. If frame time is used, the frame structure shall consist of the frame synchronization word, followed by the high order time word, followed by the low order time word, followed by the microsecond time word, followed by the data words from all sources making up the composite signal up to the frame length specified in subparagraph 8.6.6 (see figure 8-3). If frame time is not used, the frame synchronization word shall be followed immediately by the data words.



Additional care must be exercised in data processing and reduction if the last word in a composite stream is a command word. The associated message time tag will not appear until <u>after</u> the synchronization and time words in the next frame.

- 8.6.8 The following subparagraphs describe the recommended techniques for recording the high bit rate composite output signal.
- 8.6.8.1 Longitudinal recording shall conform to the PCM recording provisions of chapter 6.
- 8.6.8.2 Recording using parallel HDDR or rotary head recorders offers the advantage of inputting a single high bit rate signal to the recording system. The input PCM signal shall conform to the appropriate sections of this standard.
- 8.6.8.3 If recording using digital recorders or other noncontinuous recording processes with buffered inputs, the fill words, inserted to provide a continuous output stream, may be optionally eliminated.

8.7 Single Bus Track Spread Recording Format


The following subparagraphs describe the characteristics of a single bus recording technique using a multiple tape track spread output format.

8.7.1 The target tape recorder/reproducer for a track spread format is a longitudinal fixed-head machine described in chapter 6 and not one employing parallel high density digital recording (HDDR) or rotary head recording characteristics.


DATA FRAME FRAME FRAME FRAME SYNC WORD 1 MICRO TIME HIGH TIME LOW TIME **PATTERN DATA DATA DATA DATA** WORD N WORD N-1 WORD N-3 WORD N-2 END OF FRAME

Figure 8-3. Composite frame structure.

8.7.2 The code generated for longitudinal tape recording shall be RNRZ-L or $Bi\phi$ -L as described in chapters 4 and 6.



- 8.7.3 To extend recording time while still acquiring 100 percent of the MIL-STD-1553 bus data, a multiple track spread recording technique is presented.
- 8.7.3.1 When necessary to use more than one tape recording track (to extend record time), separate PCM streams shall be created and delayed by 24/TK bits with respect to each other, where TK represents the number of tape tracks used for a given bus.
- 8.7.3.2 When multiple track spread recording is required, the track spread shall be on a bus basis such as bus number 1 spread over four tracks, and bus number 2 spread over two tracks. The maximum number of tracks per bus shall be limited to four.



- 8.7.3.3 Each stream shall have a frame synchronization pattern 24 bits in length, conforming to subparagraph 8.6.6.
- 8.7.3.4 The word structure shall be identical to that described in paragraph 8.4.
- 8.7.3.5 The frame length shall be fixed and shall be the same for each track used for a given bus. The frame length shall conform to the requirements of subparagraph 8.6.5.
- 8.7.3.6 The data shall be formatted such that it is transmitted (recorded) most significant bit first.

8.7.3.7 A structure employing frame time is recommended but optional. This subparagraph describes a four-track spread example using frame time. The PCM stream designated TK1 shall be constructed as the frame synchronization word, followed by the high order frame time word, followed by data words (see figure 8-4). The PCM stream designated TK2 shall be constructed as the frame synchronization word, followed by the low order frame time word, followed by data words. The PCM stream designated TK3 shall be constructed as the frame synchronization word, followed by the microsecond frame time word, followed by data words. The PCM stream designated TK4 shall be constructed as the frame synchronization word, followed by the first data word, followed by other data words. Schemes using one, two, or three tracks for a given bus shall follow like construction; that is, sequencing through the data track by track. If frame time is not used, data words shall immediately follow the frame synchronization patterns.



Additional care must be exercised in data processing and reduction if the last word in the final track spread stream is a command word. The associated message time tag will not appear until <u>after</u> the synchronization and time words in the next frame.

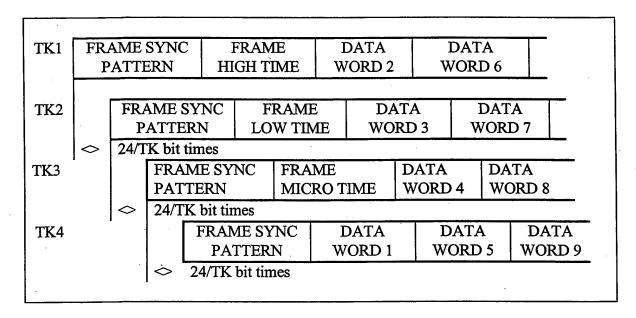


Figure 8-4. Multiple tape track spread format (4-track spread example).

CHAPTER 9

TELEMETRY ATTRIBUTES TRANSFER STANDARD

9.1 General

Telemetry attributes are those parameters required by the receiving/ processing system to acquire, process, and display the telemetry data received from the test item/source. The Telemetry Attributes Transfer Standard (TMATS) provides a common definition and format to facilitate the transfer of information between the user and the test range and between ranges. The telemetry attributes are defined such that the information required to set up the telemetry receiving and processing equipment is provided. The format, while not necessarily compatible with any receiving/ processing system, will allow test ranges or other receiving systems to develop a computer conversion program to extract the information and to set up data required for their unique equipment configuration. Nonstandard parameter variations are not included in the attribute listings of choices but may be included by exception in the comments section of each group.

The intent of this chapter is to cover <u>primarily</u> attributes and terminology included in or consistent with the other chapters in document 106. For example, PCM format attributes should comply with the PCM standards as given in chapter 4. Other attributes are included, at times, for service and utility, but should not be construed as endorsements apart from the other 106 chapters.

9.2 Scope

The TMATS provides the definition of the telemetry attributes and specifies the media and data format necessary to permit the ready transfer of the information required to set up the telemetry receiving/processing functions at a test range. The standard does not conform to nor does it define existing or planned capabilities of any given test range. Only those parameters which are defined in this document are included by specific reference. Other nonstandard parameter values/definitions may be included in the comments section of each group.

9.3 Purpose

The TMATS provides a common format for the transfer of information between the user and a test range or between ranges (see appendix H). This format will minimize the "station unique" activities that are necessary to support any test item. In addition, it is intended to relieve the labor intensive process currently required to reformat the information by providing the information on computer compatible media, thus reducing errors and requiring less preparation time for test support.

9.4 Media and Data Structure

A variety of physical and electronic media are currently available for use in exchanging attribute information. The most important factor in selecting which medium to use is that the parties involved must agree to the specific medium of choice. If any data compression (such as Backup/Restore or Zip/Unzip) will be used, both parties should agree to its use.

A cover sheet describing the system that produced the attribute medium should accompany the attribute information. A recommended format for the cover sheet is given in appendix I.

9.4.1 <u>Physical Format</u>. Attributes for each mission configuration are to be supplied in a single physical file with contents as 7-bit ASCII coded characters. Line feed (LF) and carriage return (CR) may be used to improve readability of the information. Nonprintable characters will be discarded by the destination agency prior to translating the attributes into telemetry system configuration information.

For disks, multiple mission configurations may be provided on a single disk; however, each configuration must be in a separate file identified in the disk directory. File names should use the file extensions .TXT to indicate a text file, or .TMT to indicate a TMATS file. A stick-on label and the accompanying cover sheet identify the file names corresponding to the mission configuration used for each mission.

On magnetic tape, physical records may be any size up to 2048 bytes. A single end-of-file (EOF) mark indicates the end of a mission configuration. Additional mission configurations can be included in sequential files on a single tape. A double EOF is used to indicate the end of the last mission configuration on the tape. A stick-on label and an accompanying cover sheet identifying the missions for each configuration are required.

9.4.2 <u>Logical Format</u>. Each attribute appears in the file as a unique code name and as a data item. The code name appears first, delimited by a colon. The data item follows, delimited by a semicolon. Thus an attribute is formatted as A:B;, where A is the code name and B is the data item, in accordance with the tables in paragraph 9.5. Numeric values for data items may be either integer or decimal. Scientific notation (± d.dddddE± ee) is allowed only for the specific data items defined for its use in the tables in paragraph 9.5. For alphanumeric data items, including keywords, either upper or lower case is allowed; all defined keyword values are shown as upper case and enclosed in quotes in the tables in paragraph 9.5. Semicolons are not allowed in any data item (including comment items). Any number of attributes may be supplied within a physical record subject to the maximum mentioned in subparagraph 9.4.1. Attributes may appear in any order.

There are two basic types of attribute code names: single and multiple entry. Single-entry attributes are those for which there is only one data item. Multiple-entry attributes appear once in the definition tables in paragraph 9.5 but have multiple items; these items are assigned a number. The number appears in the code name preceded by a hyphen. For example, data source identifiers might have the following entries:

G\DSI-1:Aircraft; G\DSI-2:Missile; G\DSI-3:Target;

The code name COMMENT may be used to interject comments to improve readability. (Note that the comment data items, such as G\COM, are intended to convey further details within the TMATS file itself.) Comments must follow the attribute logical format, as shown below:

COMMENT: This is an example of a comment;

Refer to paragraph 9.5 for detailed definition of code names and attributes and appendix J for an example application of this standard.

9.5 Telemetry Attributes

The description of the mission configuration includes all potential sources of data, RF links, pre- or post-detected analog tapes, or onboard recorded magnetic tapes. Each of these have unique characteristics which must be defined. Each source is given a unique identity and its characteristics are specifically defined in associated attributes fields. In multiplexed systems, each data stream is uniquely identified by a data link name, which, in turn, is related to the data source name.



Only the information that is essential to define the attributes of a system is required. Nonapplicable information does not need to be included in the file. However, all attribute information given is to be provided in the specified format.

The attributes defined in this section proceed from the general level to the detailed level. The groups defined, in terms of data to be entered, are described next.

- <u>General Information</u> establishes the top-level program definition and identifies the data sources.
- <u>Transmission Attributes</u> define an RF link. There will be one group for each RF link identified in the General Information Group.

- Tape Source Attributes identify a tape data source.
- <u>Multiplex/Modulation Attributes</u> describe the FM/FM, FM/PM, or PM/PM multiplex characteristics. Each multiplexed waveform must have a unique set of attributes. For the analog measurement, the tie to the engineering units conversion is made in this group.
- <u>Digital Data Attributes</u> are divided into three groups: the PCM Format Attributes, the PCM Measurement Description, and the 1553 Bus Data Attributes.
- <u>PCM Format Attributes</u> define the PCM data format characteristics, including subframes and embedded formats. Each PCM format will have a separate format attributes group.
- <u>PCM Measurement Descriptions</u> define each PCM measurand that ties the PCM measurement, format, and data conversion (calibration) together.
- <u>1553 Bus Data Attributes</u> specify the PCM encoded 1553 bus format characteristics.
- <u>PAM Attributes</u> contain the definition of the PAM system. It includes the PAM format characteristics and measurement attributes. The tie to the engineering unit conversion is made for the measurands contained in the PAM format.
- <u>Data Conversion Attributes</u> contain the data conversion information for all measurements in this telemetry system. The calibration data and conversion definition of raw telemetry data to engineering units is included. The tie to the measurands of the telemetry systems defined in the previous groups is via the measurement name.
- <u>Airborne Hardware Attributes</u> define the configuration of airborne instrumentation hardware in use on the test item.
- 9.5.1 <u>Contents</u>. The following subparagraphs discuss the organization of the attributes and their relationships with the various groups.
- 9.5.1.1 Organization. Attribute information is organized according to a hierarchical structure in which related items are grouped and given a common heading. The number of levels varies within the overall structure and is a function of the logical association of the attributes. At the highest level, the telemetry attributes are defined for the following groups:

<u>Identifier</u>	<u>Title</u>
G	General Information
T	Transmission Attributes
\mathbf{R}_{\perp}	Tape Source Attributes
M	Multiplexing/Modulation Attributes
P	PCM Format Attributes
D	PCM Measurement Description
В	1553 Bus Data Attributes
Α	PAM Attributes
C	Data Conversion Attributes
Н	Airborne Hardware Attributes

Within the structure, a lower case letter, for example, n, p, or r, indicates a multiple entry item with the index being the lower case letter. The range of these counters is from one to the number indicated in another data entry, usually with the appendage \N.

Within the tables, the code name, definition, and maximum field size are given for each individual attribute. The maximum field size is intended to be a guideline indicating the intended use of the attribute, and does not imply support of the maximum by any and all ranges. For example, the fact that the Number of Data Sources attribute is 2 characters long does not mean that 99 data sources are supported. Each range should be consulted as to their specific capabilities.

9.5.1.2 <u>Group Relationships</u>. The interrelationships between the various groups are shown pictorially in figure 9-1.



- Data Source ID is unique within a General Information Group
 (G). It ties the Transmission Group (T) or the Tape Group (R) or both to the G group and to the Multiplex/ Modulation Group (M).
 The tie from the M group to a PCM Group (P), a PAM Group
- (A) or a 1553 Bus Group (B) is the Data Link Name. 3. The tie from the P group to an embedded P group is another Data Link Name. 4. The tie from the M group to the Data Conversion Group (C) for an analog measurement is the Measurement Name. 5. The tie from the P group to the PCM Measurement Description Group (D) is the Data Link Name. 6. The tie from either the A, D, or B groups to the Data Conversion group is the Measurement Name.

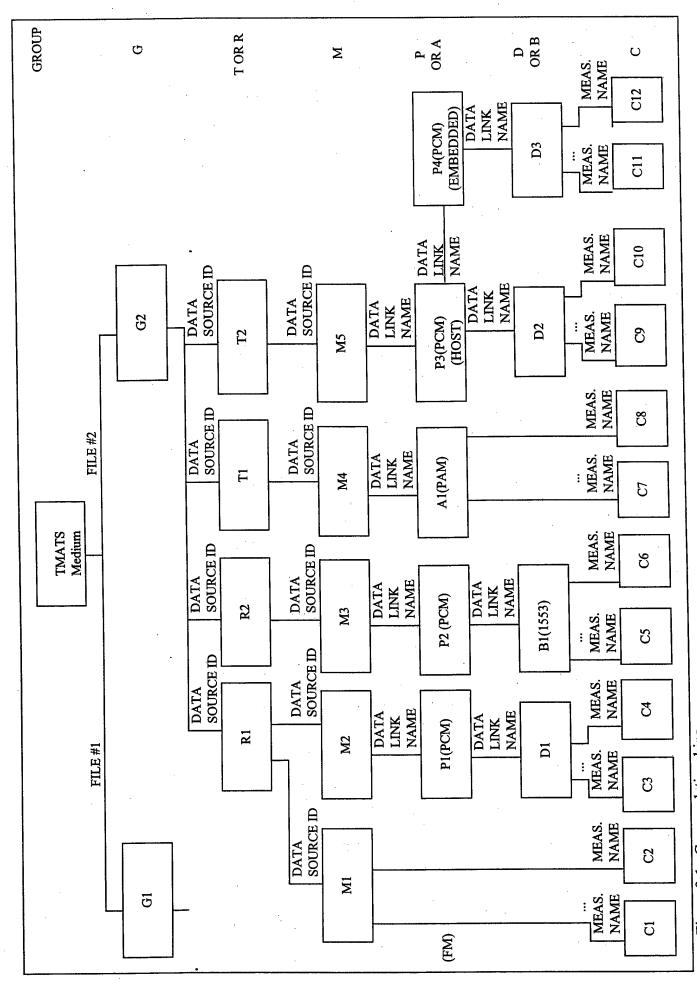


Figure 9-1. Group relationships.

9.5.2 <u>General Information (G)</u>. The general information group provides overall program information. Figure 9-2 gives the overall information that is included in this group and Table 9-1 identifies and defines the data required including the dates associated with the detailed information. Since the identification of the data sources is an integral part of the remaining groups, each source must be identified uniquely.

		GENE	RAL INFORMATION GROUP (G)		
				CODE NAME	REFERENCE PAGE
PROGRAM NAME				(G\PN)	(9-8)
	TEST	ITEM		(G\TA)	(9-8)
•	*INF	ORMATION	N .		
		IRIG 106 I	REVISION LEVEL	(G\106)	
		ORIGINA	TION DATE	(G\OD)	
		REVISION	NUMBER	(G\RN)	
		REVISION	N DATE	(G\RD)	
		UPDATE	NUMBER	(G\UN)	
		UPDATE	DATE	(G\UD)	
•		TEST NU	MBER	(G\TN)	•
		NUMBER	OF POINTS OF CONTACT	(G\POC\N)	
÷		*POINT C	DF CONTACT		
		NA	ME	(G\POC1-n)	
•		AC	BENCY	(G\POC2-n)	
		AL	DDRESS	(G\POC3-n)	
		TE	LEPHONE	(G\POC4-n)	
	*DA	TA SOURC	CE IDENTIFICATION		(9-9)
		NUMBER	R OF DATA SOURCES	(G\DSI\N)	
		-	DATA SOURCE ID	(G\DSI-n)	
			DATA SOURCE TYPE	(G\DST-n)	
	*TES	T INFORM	MATION	,	(9-9)
		TEST DU	RATION	(G\TI1)	
	'	PRE-TES	T REQUIREMENT	(G\TI2)	
		POST-TE	ST REQUIREMENT	(G\TI3)	
	SEC	URITY CLA	ASSIFICATION	(G\SC)	
•	* CC	MMENTS			
		СОММЕ	NTS	(G\COM)	(9-10)
	*}-	EADING C	ONLY - NO DATA ENTRY		

Figure 9-2. General Information Group (G).

TAB	LE 9-1. GENE	RAL INFORMA	ATION GROUP (G)
	MAXIMUM	,	
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
PROGRAM NAME	16	G\PN	NAME OF PROGRAM
TEST ITEM	64	G\TA	TEST ITEM DESCRIPTION IN
			TERMS OF NAME, MODEL,
			PLATFORM, OR
		,	IDENTIFICATION CODE, AS
•			APPROPRIATE.
INFORMATION			
IRIG 106 .	2	G\106	VERSION OF IRIG 106
REVISION LEVEL			STANDARD USED TO
			GENERATE THIS TMATS FILE.
ORIGINATION	10	G\OD	DATE OF ORIGINATION OF
DATE	1	0.02	THIS MISSION
DAIL			CONFIGURATION.
	,		DD - DAY MM - MONTH
,			YYYY – YEAR
•			(MM-DD-YYYY)
REVISION	4	G\RN	REVISION NUMBER
NUMBER	•	0 44.	ASSOCIATED WITH THIS
HOMBER			MISSION CONFIGURATION
REVISION DATE	10	G\RD	DATE OF REVISION.
100 (101(21112			DD - DAY MM - MONTH
•			YYYY – YEAR
			(MM-DD-YYYY)
UPDATE NUMBER	2	G\UN	UPDATE NUMBER OF CURRENT
	_		CHANGE WHICH HAS NOT
	·	_	BEEN INCORPORATED AS A
		, i	REVISION
UPDATE DATE	10	G\UD	DATE OF UPDATE.
			DD - DAY MM - MONTH
			YYYY – YEAR
			(MM-DD-YYYY)
TEST NUMBER	16	G\TN	TEST IDENTIFICATION
NUMBER OF	1	G\POC\N	NUMBER OF POINTS OF
POINTS OF			CONTACT TO BE GIVEN
CONTACT			
POINT OF			LIST EACH OF THE
CONTACT:			RESPONSIBLE AGENCIES AND
NAME	24	G\POC1-n	THEIR POINT OF CONTACT
AGENCY	48	G\POC2-n	
ADDRESS	48	G\POC3-n	·
TELEPHONE	20	G\POC4-n	

TABLE 9	-1 (Cont'd). G	ENERAL INI	FORMATION GROUP (G)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
•.	SIZE	NAME	
DATA SOURCE IDI	ENTIFICATIO	N	
NUMBER OF	2	G\DSI\N	SPECIFY THE NUMBER OF DATA
DATA SOURCES			SOURCES: FOR RF TELEMETRY
			SYSTEMS, GIVE THE NUMBER OF
,			CARRIERS; FOR TAPE
			RECORDED DATA, IDENTIFY THE
		. v.	NUMBER OF TAPE SOURCES.
DATA SOURCE	32	G\DSI-n	PROVIDE A DESCRIPTIVE NAME
ID			FOR THIS SOURCE. EACH
			SOURCE IDENTIFIER MUST BE
,			UNIQUE.
DATA SOURCE	3	G\DST-n	SPECIFY THE TYPE OF SOURCE:
TYPE			RF - 'RF', TAPE - 'TAP',
·			OTHER - 'OTH' .
PROVIDE THE ABO	VE TWO ITEM	IS FOR EAC	H DATA SOURCE.
TEST INFORMATI	ON		
TEST	4	G\TI1	APPROXIMATE DURATION OF
DURATION			TEST IN HOURS.
PRE-TEST	1	G\TI2	INDICATE WHETHER A PRE-TEST
REQUIREMENT			REQUIREMENT IS APPLICABLE.
			PROVIDE DETAILS IN COMMENT
			RECORD ('Y' OR 'N')
POST-TEST	1	G\TI3	SPECIFY WHETHER A POST-TEST
REQUIREMENT			REQUIREMENT IS APPLICABLE.
			PROVIDE DETAILS IN COMMENT
: .			RECORD ('Y' OR 'N').
CECLIDITY	1	G\SC	PROVIDE THE CLASSIFICATION
SECURITY CLASSIFICATION	1	0.20	OF THE PROJECT DATA.
CLASSIFICATION			PROVIDE CLASSIFICATION
			GUIDE DESCRIPTION IN
,	·		COMMENT RECORD.
			UNCLASSIFIED - 'U'
			CONFIDENTIAL - 'C'
			SECRET - 'S'
		· ·	TOP SECRET - 'T'
			OTHER - 'O'
	<u></u>	L	OTHER- O

TABLE	9-1 (Cont'd). Gl	ENERAL IN	FORMATION GROUP (G)
PARAMETER	MAXIMUM FIELD SIZE	CODE NAME	DEFINITION
COMMENTS			
COMMENTS	1600	G\COM	INFORMATION THAT IS NEEDED TO COMPLETE DATA REQUESTED AND ANY OTHER INFORMATION DESIRED.

9.5.3 Transmission Attributes (T).

The Transmission Attributes are presented graphically in figure 9-3 and specified in table 9-2. The information contained within this group is used to set up the RF receiver through the detection and recovery of the baseband composite waveform. The format contains the information needed to configure the antenna and receiver subsystems.

Additional equipment inserted in a specific range configuration such as microwave or other relay is intended to be transparent to the user and is not described under Transmission Attributes.

Because the information is mutually exclusive, only the appropriate frequency modulation (FM) or phase modulation (PM) system data set is required for a link.

		CODE NAME	REFERENCE PAGE
DATA SOURCE ID		(T-x\ID)	(9-12)
	*SOURCE RF ATTRIBUTES		(9-12)
	TRANSMITTER ID	(T-x\TID)	
•	FREQUENCY	(T-x\RF1)	
	RF BANDWIDTH	(T-x\RF2)	
	DATA BANDWIDTH	(T-x\RF3)	
	MODULATION TYPE	(T-x\RF4)	
	TOTAL CARRIER MODULATION	(T-x\RF5)	
	POWER (RADIATED)	(T-x\RF6)	
	NUMBER OF SUBCARRIERS	(T-x\SCO\N)	
	SUBCARRIER NUMBER	(T-x\SCO1-n)	(9-12)
	MODULATION INDEX	(T-x\SCO2-n)	
	MODULATOR NON-LINEARITY	(T-x\RF7)	
	*PREMODULATION FILTER	,	(9-13)
	BANDWIDTH	(T-x\PMF1)	-
	SLOPE	(T-x\PMF2)	
	ТҮРЕ	(T-x\PMF3)	
	*TRANSMIT ANTENNA		(9-13)
	TRANSMIT ANTENNA TYPE	(T-x\AN1)	•
	TRANSMIT POLARIZATION	(T-x\AN2)	
•	ANTENNA LOCATION	(T-x\AN3)	
	*ANTENNA PATTERNS		(9-13)
	DOCUMENT	(T-x\AP)	
•	*POINT OF CONTACT		
	NAME	(T-x\AP\POC1)	
	AGENCY	(T-x\AP\POC2)	
	ADDRESS	(T-x\AP\POC3)	
	TELEPHONE	(T-x\AP\POC4)	
	*GROUND STATION ATTRIBUTES		(9-13)
•	IF BANDWIDTH	(T-x\GST1)	
	BASEBAND COMPOSITE BANDWIDTH	(T-x\GST2)	
	*GAIN CONTROL		(9-14)
	AGC TIME CONSTANT	(T-x-\GST3)	
	MGC GAIN SET POINT	(T-x\GST4)	
	AFC/APC	(T-x\GST5)	
	TRACKING BANDWIDTH	(T-x\GST6)	
	POLARIZATION RECEPTION	(T-x\GST7)	
	*FM SYSTEMS	•	(9-14)
	OR	•	
	DISCRIMINATOR BANDWIDTH	(T-x\FM1)	
	DISCRIMINATOR LINEARITY	(Tx\FM2)	
	*PM SYSTEMS		(9-14)
•	PHASE LOCK LOOP BANDWIDTH	(T-x\PLL)	
	*COMMENTS		
	COMMENTS	(T-x\COM)	(9-15)
	*HEADING ONLY - NO DATA ENTRY		

Figure 9-3. Transmission Attributes Group (T).

TABL	E 9-2. TRAN	SMISSION A	ATTRIBUTES GROUP (T)
PARAMETER	MAXIMUM FIELD SIZE	CODE NAME	DEFINITION
DATA SOURCE ID	32	T-x\ID	DATA SOURCE ID CONSISTENT WITH GENERAL INFORMATION GROUP.
SOURCE RF ATT			
TRANSMITTER ID	12	T-x\TID	TRANSMITTER IDENTIFICATION
FREQUENCY	6	T-x\RF1	CARRIER FREQUENCY, IN MHz. IF PROGRAMMABLE, ENTER 'P', AND DEFINE IN COMMENT RECORD.
RF BANDWIDTH	6	T-x\RF2	TOTAL RF BANDWITH (-60 dB) OF MODULATED SIGNAL, IN MHz.
DATA BANDWIDTH	6	T-x\RF3	COMPOSITE BASEBAND DATA BANDWIDTH (3 dB), IN kHz.
MODULATION TYPE	8	T-x\RF4	DEFINE THE MODULATION TYPE: 'FM' 'PM' 'BPSK' 'DPSK' 'QPSK' 'OTHR' 'FQPSK-B'
TOTAL CARRIER MODULATION	6	T-x\RF5	FOR FM SYSTEM DEFINE TOTAL CARRIER DEVIATION, PEAK-TO-PEAK, IN kHz. FOR PM SYSTEM DEFINE TOTAL PHASE MODULATION, PEAK-TO-PEAK, IN RADIANS.
POWER (RADIATED)	4	T-x\RF6	TOTAL TRANSMITTED POWER WHEN MODULATED, IN WATTS.
NUMBER OF SUBCARRIERS	2	T-x\ SCO\N	NUMBER OF SUBCARRIERS IN THE COMPOSITE BASEBAND WAVEFORM, n. IF NONE, ENTER 'NO'.
SUBCARRIER NUMBER	5	T-x\ SCO1-n	GIVE THE IRIG CHANNEL NUMBER FOR THE SUBCARRIER. IF NONSTANDARD SUBCARRIER, ENTER 'NO', AND ENTER FREQUENCY IN THE COMMENTS SECTION WHERE n IS AN IDENTIFICATION TAG FOR THE SUBCARRIER.
MODULATION INDEX	4	T-x\ SCO2-n	SPECIFY THE MODULATION INDEX FOR EACH SUBCARRIER IN THE COMPOSITE WAVEFORM, AS APPROPRIATE.



TABLE 9-	2 (Cont'd). TR	ANSMISSION	NATTRIBUTES GROUP (T)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
MODULATOR	4	T-x\RF7	MODULATOR NONLINEARITY, IN
NONLINEARITY		,	PERCENT.
PREMODULATIO	NEILTER	<u> </u>	
BANDWIDTH	6	T-x\PMF1	PRE-MODULATION COMPOSITE
DANDWADIN			FILTER BANDWIDTH, 3 dB CUT-
			OFF FREQUENCY, IN kHz.
SLOPE	2	T-x\PMF2	PRE-MODULATION FILTER
SLOI L		1-XUIVII Z	ASYMPTOTIC ROLL-OFF SLOPE,
			dB/OCTAVE.
TYPE	2	T-x\PMF3	SPECIFY THE FILTER TYPE:
11FE		1-7/11/1/2	CONSTANT AMPLITUDE - 'CA'
•			CONSTANT DELAY - 'CD'
			OTHER - 'OT'
TRANSMIT ANTE	NINTA		OTHER - OT
TRANSMIT ANTE	16	T-x\AN1	TRANSMIT ANTENNA TYPE.
ANTENNA TYPE	10	1-XVAINI	TRANSMIT ANTENNA TITE.
ANTENNATIFE			
TRANSMIT	4	T-x\AN2	TRANSMIT ANTENNA
POLARIZATION	·	1 24421	POLARIZATION.
OLANIZATION			'RHCP' 'LHCP' LINEAR - 'LIN'
ANTENNA	16	T-x\AN3	DESCRIBE THE ANTENNA
LOCATION			LOCATION.
ANTENNA PATTE	RNS		
DOCUMENT	16	T-x\AP	IDENTIFY DOCUMENT HAVING
			ANTENNA PATTERNS.
POINT OF			IDENTIFY THE POINT OF
CONTACT:	·		CONTACT FOR ADDITIONAL
NAME	24	T-x\AP\	INFORMATION.
	·	POC1	,
AGENCY	48	T-x\AP\	
		POC2	
ADDRESS	48	T-x\AP\	
		POC3	
TELEPHONE	20	T-x\AP\	
		POC4	
GROUND STATIO	N ATTRIBUT	ES	
IF BANDWIDTH	6	T-x\GST1	DEFINE THE IF BANDWIDTH (3
			dB) IN MHz.
BASEBAND	6	T-x\GST2	DEFINE THE CUTOFF
COMPOSITE			FREQUENCY (3 dB), IN kHz, OF
BANDWIDTH-			THE OUTPUT FILTER.

TABLE	9-2 (Cont'd).	TRANSMISS	CION ATTRIBUTES GROUP (T)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
•	SIZE	NAME	
GAIN CONTROL			***
AGC TIME	4	T-x\GST3	SPECIFY THE AGC TIME CONSTANT
CONSTANT		,	DESIRED IN MILLISECONDS.
MGC GAIN	6	T-x\GST4	PROVIDE THE MANUAL GAIN CONTROL
SET POINT			SET POINT IN TERMS OF RECEIVED
		·	SIGNAL STRENGTH, dBm.
AFC/APC	3	T-x\GST5	SPECIFY AUTOMATIC FREQUENCY
			CONTROL ('AFC') OR AUTOMATIC
			PHASE CONTROL ('APC') OR NONE
			('NON').
TRACKING	4	T-x\GST6	SPECIFY TRACKING LOOP BANDWIDTH
BANDWIDTH			IN Hz.
POLARIZATION	5	T-x\GST7	SPECIFY POLARIZATION TO BE USED:
RECEPTION			RHCP - 'RHCP'
TOOL TOO			LHCP - 'LHCP'
			вотн - 'вотн'
			BOTH WITH DIVERSITY COMBINING:
•			PRE-DETECTION-'B&DPR'
			POST-DETECTION-'B&DPO'
			DIVERSITY COMBINING (ONLY):
			PRE-DETECTION-'PRE-D'
			POST-DETECTION-'POS-D'
			OTHER - 'OTHER',
			SPECIFY IN COMMENTS.
	· .		
FM SYSTEMS	100 100 100 100 100 100 100 100 100 100		
DISCRIMINATOR	4	T-x\FM1	SPECIFY THE DISCRIMINATOR
BANDWIDTH		·	BANDWIDTH REQUIRED IN MHz.
DISCRIMINATOR	4	T-x\FM2	SPECIFY THE REQUIRED LINEARITY
LINEARITY		<u> </u>	OVER THE BANDWIDTH SPECIFIED.
PM SYSTEMS			
PHASE LOCK	4	T-x\PLL	SPECIFY THE PHASE LOCKED LOOP
LOOP			BANDWIDTH.
BANDWIDTH			

TABLE	9-2 (Cont'd).	TRANSMIS:	SION ATTRIBUTES GROUP (T)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
COMMENTS			
COMMENTS	1600	T-x\COM	PROVIDE THE ADDITIONAL
			INFORMATION REQUIRED TO
			COMPLETE THE ABOVE
			INFORMATION REQUESTED OR TO
		ļ	PROVIDE ANY OTHER
			INFORMATION THAT IS DESIRED.

9.5.4 <u>Tape Source Attributes (R)</u>. This group describes the attributes required when the data source is a magnetic tape as specified in chapter 6. In the case of the tape data link identification, each data source must be identified. In some cases the data source identification may be identical, particularly when the same information has been received from different receiver sites, on different polarizations, or on different carriers for redundancy purposes. Some of the information requested will be available only from the recording site or the dubbing location.

Figure 9-4 indicates the information required. Various categories of information have been included. In the data section of the attributes, it will be necessary to repeat the items until all of the data sources have been defined, including the multiple tracks, which contain ground station data of interest. Table 9-3 defines the information required. Any nonstandard tape recordings will require explanation in the comments and may require supplemental definition.

		CODE NAME	REFERENCE PAGE
DATA SOURCE ID	<u> </u>	(R-x\ID)	(9-17)
	TAPE ID	(R-x\RID)	(9-17)
	TAPE DESCRIPTION	(R-x\R1)	
	*TAPE CHARACTERISTICS		
	ТАРЕ ТҮРЕ	(R-x\TC1)	
	TAPE MANUFACTURER	(R-x\TC2)	
	TAPE CODE	(R-x\TC3)	
	TAPE WIDTH	(R-x\TC4)	
	TAPE HOUSING	(R-x\TC5)	
	TYPE OF TRACKS	(R-x\TT)	
	NUMBER OF TRACKS	(R-x\N)	
	RECORD SPEED	(R-x\TC6)	
	DATA PACKING DENSITY	(R-x\TC7)	
	TAPE REWOUND	(R-x\TC8)	
	*RECORDER INFORMATION	•	(9-18)
	TAPE DRIVE MANUFACTURER	- (R-x\RI1)	, ,
	TAPE DRIVE MODEL	(R-x\RI2)	
	ORIGINAL TAPE	(R-x\RI3)	
•	DATE AND TIME CREATED	(R-x\RI4)	• •
	*CREATING ORGANIZATION	- ` ´	(9-18)
	POINT OF CONTACT		` ,
	NAME	(R-x\POC1)	
	AGENCY	(R-x\POC2)	
	ADDRESS	(R-x\POC3)	
•	TELEPHONE	(R-x\POC4)	
	DATE OF DUB	(R-x\RI5)	•
•	*DUBBING ORGANIZATION		
	POINT OF CONTACT		
	NAME	(R-x\DPOC1))
	AGENCY	(R-x\DPOC2))
	ADDRESS	(R-x\DPOC3))
	TELEPHONE -	(R-x\DPOC4))
•	*DATA		(9-19)
•	TRACK NUMBER	(R-x\TK1-n)	
	RECORDING TECHNIQUE	(R-x\TK2-n)	
	DATA SOURCE ID	(R-x\DSI-n)	
	DATA DIRECTION	(R-x\TK3-n)	
	*REFERENCE TRACK		(9-20)
•	NUMBER OF REFERENCE TRACKS	(R-x\RT\N)	
·	TRACK NUMBER	(R-x\RT1-n)	ı
	REFERENCE FREQUENCY	(R-x\RT2-n)	ı
	*COMMENTS		
	COMMENTS		(9-20)
	*HEADING ONLY - NO DATA ENTRY		

Figure 9-4. Tape Source Attributes Group (R).

TABLE 9-3. TAPE SOURCE ATTRIBUTES GROUP (R) MAXIMUM FIELD CODE NAME DATA SOURCE ID 32 R-x\ID TAPE ID 32 R-x\RID TAPE ID 32 R-x\RID TAPE TYPE 4 R-x\TC1 SPECIFY THE TAPE TYPE:
DATA SOURCE ID 32 R-x\ID DATA SOURCE ID CONSISTENT WITH GENERAL INFORMATION GROUP. TAPE ID 32 R-x\RID TAPE IDENTIFICATION. TAPE CHARACTERISTICS
DATA SOURCE ID 32 R-x\ID DATA SOURCE ID CONSISTENT WITH GENERAL INFORMATION GROUP. TAPE ID 32 R-x\RID TAPE IDENTIFICATION. TAPE CHARACTERISTICS
WITH GENERAL INFORMATION GROUP. TAPE ID 32 R-x\RID TAPE REEL NUMBER OR OTHER DESCRIPTION TAPE CHARACTERISTICS
TAPE ID 32 R-x\RID TAPE IDENTIFICATION. TAPE 32 R-x\R1 DESCRIPTION TAPE CHARACTERISTICS GROUP. TAPE IDENTIFICATION. TAPE REEL NUMBER OR OTHER DEFINITION.
TAPE ID 32 R-x\RID TAPE IDENTIFICATION. TAPE 32 R-x\R1 TAPE REEL NUMBER OR OTHER DESCRIPTION TAPE CHARACTERISTICS
TAPE 32 R-x\R1 TAPE REEL NUMBER OR OTHER DESCRIPTION DEFINITION. TAPE CHARACTERISTICS
DESCRIPTION DEFINITION. TAPE CHARACTERISTICS
DESCRIPTION DEFINITION. TAPE CHARACTERISTICS
TAPE CHARACTERISTICS
TARE TYPE A D TARE TARE TARE TARE TARE
THE TARE
ANALOG - 'ANAL'
CASSETTE - 'CASS'
HDDR - 'HDDR'
PARALLEL - 'PARA'
OTHER - 'OTHR', DEFINE IN
COMMENTS RECORD.
TAPE 8 R-x\TC2 NAME OF MANUFACTURER OF
MANUFACTURER THE TAPE.
TAPE CODE 8 R-x\TC3 SPECIFY MANUFACTURER'S
TAPE DESIGNATION CODE.
TAPE WIDTH 4 R-x\TC4 PHYSICAL DIMENSION OF TAPE
WIDTH, IN.
TAPE HOUSING 5 R-x\TC5 STATE THE REEL SIZE, INCHES: '10.5' '14.0' '15.0'
'16.0' 'OTHER' STATE THE CASSETTE SIZE, MM:
'12.65' '19.0' 'OTHER'
TYPE OF TRACKS 2 R-x\TT STATE THE TYPE OF TRACKS ON THE TAPE:
LONGITUDINAL - 'LO'
ROTARY - 'RO'
NUMBER OF 2 R-x\N STATE THE NUMBER OF TRACKS
TRACKS ON THE TAPE.
RECORD SPEED 4 R-x\TC6 STATE RECORD SPEED IN
INCHES PER SECOND.

TABLE 9-	3 (Cont'd). TA	PE SOURCE	ATTRIBUTES GROUP (R)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
DATA PACKING	2	R-x\TC7	STATE RECORDING SYSTEM
DENSITY			BANDWIDTH:
•			INTERMEDIATE BAND - 'IM'
			WIDE BAND - 'WB'
			DOUBLE DENSITY - 'DD'
			OTHER - 'OT'
TAPE REWOUND	1	R-x\TC8	YES - 'Y' NO - 'N'
RECORDER INFOR	<u> </u> RMATION		
TAPE DRIVE	8	R-x\RI1	NAME OF TAPE DRIVE
MANUFACTURER			MANUFACTURER
TAPE DRIVE	8	R-x\RI2	MANUFACTURER'S MODEL
MODEL			NUMBER OF TAPE DRIVE USED
	·		TO CREATE THE TAPE.
ORIGINAL TAPE	1 .	R-x\RI3	YES - 'Y' NO - 'N'
DATE AND TIME	19	R-x\RI4	DATE AND TIME TAPE WAS
CREATED			CREATED:
			DD - DAY MM - MONTH
			YYYY - YEAR HH - HOUR
			MI – MINUTE SS - SECOND
CDT A TOTAL			(MM-DD-YYYY-HH-MI-SS)
CREATING			POINT OF CONTACT AT THE FACILITY CREATING THE TAPE:
ORGANIZATION POINT OF			NAME, ADDRESS, AND
CONTACT:			TELEPHONE.
NAME	24	R-x\POC1	TEBELLIONE.
141441			
AGENCY	48	R-x\POC2	
ADDRESS	48	R-x\POC3	
TELEPHONE	20	R-x\POC4	
TELEFHONE	20	K-XV-0C4	
DATE OF DUB	10	R-x\RI5	DATE THE DUB WAS MADE:
			DD - DAY MM - MONTH
			YYYY - YEAR
			(MM-DD-YYYY)

TABLE	9-3 (Cont'd).	TAPE SOUR	CE ATTRIBUTES GROUP (R)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
DUBBING			POINT OF CONTACT AT THE DUBBING
ORGANIZATION			AGENCY: NAME, ADDRESS, AND
POINT OF			TELEPHONE
CONTACT:			·
NAME	24	R-x\	
- " '		DPOC1	
AGENCY	48	R-x∖	·
		DPOC2	·
ADDRESS	48	R-x\	
		DPOC3	
TELEPHONE	20	R-x∖	
		DPOC4	j
•			
DATA (DEFINE INF	ORMATION	CONTAINE	D ON EACH TRACK OF THE TAPE.)
TRACK NUMBER	2	R-x\TK1-n	SPECIFY THE TRACK NUMBER THAT
			CONTAINS THE DATA TO BE
·			SPECIFIED.
RECORDING	6	R-x\TK2-n	SPECIFY THE RECORDING TECHNIQUE
TECHNIQUE			USED FOR THIS TRACK:
			FM/FM - 'FM/FM'
,			HDDR - 'HDDR'
		·	PRE-DETECTION - 'PRE-D'
			DIRECT - 'DIRECT'
			FM-WIDE BAND GRP I - 'FMWBI'
			FM-WIDE BAND GRP II - 'FMWBII'
			FM-INTERMEDIATE BAND - FM-IM'
			FM-NARROW BAND - 'FM-NB'
			DOUBLE DENSITY - 'DOUDEN'
	1		ROTARY (SINGLE TRACK) - 'RO-K' ROTARY (MULTIPLEXED) - 'RO-MUX'
2.5			OTHER - 'OTHER'.
	<u> </u>		UIDEK - UIDEK.

TABLE 9-3. (Cont'd). TAPE SOURCE ATTRIBUTES GROUP (R)					
	MAXIMUM				
PARAMETER	FIELD	CODE	DEFINITION		
	SIZE	NAME			
DATA SOURCE ID	. 32	R-x\DSI-n	SPECIFY THE DATA SOURCE		
			IDENTIFICATION. FOR A SITE		
	·		RECORDED MULTIPLEXED		
		·	TRACK, PROVIDE A DATA		
•			SOURCE IDENTIFICATION.		
DATA DIRECTION	3	R-x\TK3-n	FORWARD - 'FWD'		
			REVERSE - 'REV'		
REFERENCE TRAC	K				
NUMBER OF	1	R-x\RT\N	SPECIFY THE NUMBER OF		
REFERENCE			REFERENCE TRACKS.		
TRACKS					
TRACK	2	R-x\RT1-n	STATE THE TRACK LOCATION		
NUMBER			OF THE REFERENCE SIGNAL.		
REFERENCE	6	R-x\RT2-n	FREQUENCY OF REFERENCE		
FREQUENCY			SIGNAL, kHz.		
	SE MAPE SOUI	RCE ATTRIB	UTES GROUP FOR EACH TAPE		
SOURCE.					
COMMENTS	T 2200	,			
COMMENTS	3200	R-x\COM	THIS RECORD IS TO BE USED TO		
	,		PROVIDE THE ADDITIONAL		
			INFORMATION REQUESTED AND		
			TO PROVIDE ANY OTHER		
			INFORMATION DESIRED.		

9.5.5 <u>Multiplex/Modulation Attributes (M)</u>. The composite baseband waveform is received from the receiver or tape reproducer electronics and is passed to the demultiplexer/demodulator for further processing. Figure 9-5 summarizes the information that is required to continue processing the data. The composite baseband waveform may consist of any number of signals, which are modulated directly onto the RF carrier including a baseband data signal, and one or more subcarriers.

The baseband data signal may be PCM, pulse amplitude modulation (PAM), or analog data. The PCM and PAM data streams must be defined in terms of a data link name. This data link name is unique for each system that contains different data, has a different format, or has a different data rate. The analog measurand is typically converted into engineering units appropriate for the measurand. The measurement name provides the connection to the Data Conversion Attributes Group (C).

Subcarriers, both standard and nonstandard, may be part of the baseband composite waveform. These, in turn, may be modulated with PCM, PAM, or analog data. As with the baseband data signal, these data channels must be defined. Table 9-4 specifies the required information for the data signal attributes.

		CODE NAME	REFERENCE PAGE
DATA SOURCE ID	·	(M-x\ID)	(9-22)
	*COMPOSITE SIGNAL STRUCTURE		(9-22)
	SIGNAL STRUCTURE TYPE	(M-x\BB1)	•
	MODULATION SENSE	(M-x\BB2)	
	COMPOSITE LPF BANDWIDTH	(M-x\BB3)	
•	*BASEBAND SIGNAL		(9-22)
	BASEBAND SIGNAL TYPE	(M-x\BSG1)	
	*LOW PASS FILTER	•	
	BANDWIDTH	(M-x\BSF1)	
•	ТҮРЕ	(M-x\BSF2)	
	*BASEBAND DATA LINK TYPE		(9-23)
	*PCM OR PAM	•	
•	OR DATA LINK NAME *ANALOG	(M-x\BB\DLN)	
	MEASUREMENT NAME	(M-x\BB\MN)	
•	*SUBCARRIERS	(111 11 22 11111)	(9-23)
	NUMBER OF SUBCARRIERS	(M-x\SCO\N)	(>)
	*IRIG SUBCARRIERS	(,	
* **	NUMBER OF SCOs	(M-x\SI\N)	
	SCO NUMBER	(M-x\SI1-n)	
	SCO #n DATA TYPE	(M-x\SI2-n)	
	MODULATION SENSE	(M-x\SI3-n)	
	*LOW PASS FILTER		(9-24)
	BANDWIDTH	(M-x\SIF1-n)	
	ТҮРЕ	(M-x\SIF2-n)	•
	*DATA LINK TYPE		(9-24)
	*PCM OR PAM	•	
,	OR DATA LINK NAME	(M-x\SI\DLN-n)	
	*ANALOG		
	MEASUREMENT NAME	(M-x\SI\MN-n)	
•	OTHER	(M-x\SO)	(9-24)
	REFERENCE CHANNEL	(M-x\RC)	
	*COMMENTS		
	COMMENTS	(M-x\COM)	(9-24)
	*HEADING ONLY - NO DATA ENTRY		

Figure 9-5. Multiplex/Modulation Attributes Group (M).

TABI	TABLE 9-4. MULTIPLEX/MODULATION GROUP (M)						
	MAXIMUM						
PARAMETER	FIELD	CODE	DEFINITION				
	SIZE	NAME					
DATA SOURCE ID	32	M-x\ID	DATA SOURCE IDENTIFICATION				
COMPOSITE SIGN	COMPOSITE SIGNAL STRUCTURE						
SIGNAL	7	M-x\BB1	SPECIFY THE COMPOSITE				
STRUCTURE			BASEBAND SIGNAL STRUCTURE:				
TYPE	·	•	'PCM' HYBRID:				
•	٠.	. '	'PAM' 'ANA/SCO'				
			'ANALOG' 'PAM/SCO'				
	·		'SCO's' 'PCM/SCO'				
			'OTHER'				
MODULATION	3	M-x\BB2	SPECIFY THE MODULATION				
SENSE			SENSE:				
4.4			'POS' – INDICATES THAT AN				
	t		INCREASING VOLTAGE				
			RESULTS IN AN INCREASE				
			IN FREQUENCY.				
	· ·		'NEG' – INDICATES THAT A				
			DECREASING VOLTAGE				
			RESULTS IN AN INCREASE				
	•		IN FREQUENCY				
COMPOSITE LPF	6	M-x\BB3	GIVE THE LOW PASS				
BANDWIDTH			BANDWIDTH OF THE				
			COMPOSITE WAVEFORM, IN kHz.				
		,	(3 dB CUTOFF FREQUENCY).				
BASEBAND SIGNA	<u> </u>						
BASEBAND .	3	M-x\BSG1	TYPE OF BASEBAND DATA:				
SIGNAL TYPE			'PCM' 'ANA' (ANALOG)				
			'PAM' 'OTH' (OTHER)				
			'NON' (NONE).				
LOW PASS FILTER			Attention of the state of the s				
BANDWIDTH	6	M-x\BSF1	SPECIFY LOW PASS FILTER				
			BANDWIDTH, 3 dB, CUTOFF				
			FREQUENCY, IN kHz.				
TYPE	2	M-x\BSF2	SPECIFY THE FILTER TYPE:				
I I I E		141-Y (DOL)	CONSTANT AMPLITUDE - 'CA'				
			CONSTANT DELAY - 'CD'				
			OTHER - 'OT', DEFINE IN THE				
			COMMENT RECORD.				
ļ	 	ļ	COMMILITIE RECOID.				

TABLE 9	4 (Cont'd). MU	JLTIPLEX/N	ODULATION GROUP (M)				
	MAXIMUM						
PARAMETER	FIELD	CODE	DEFINITION				
	SIZE	NAME					
BASEBAND DATA	LINK TYPE						
PCM OR PAM							
DATA LINK	32	M-x\BB\	SPECIFY THE DATA LINK NAME				
NAME		DLN	FOR PCM OR PAM DATA				
•			FORMAT.				
ANALOG							
MEASUREMENT	32	M-x\BB\	GIVE THE MEASURAND NAME.				
NAME		MN					
SUBCARRIERS							
NUMBER OF	2	M-x\SCO\	SPECIFY THE NUMBER OF				
SUBCARRIERS		N	SUBCARRIERS ON THIS DATA				
			LINK.				
IRIG SUBCARRIEI	RS						
NUMBER OF	2	M-x\SI\N	SPECIFY THE NUMBER OF IRIG				
SCOs			SUBCARRIERS.				
SCO NUMBER	5	M-x\SI1-n	GIVE THE IRIG CHANNEL				
			NUMBER FOR THE SUBCARRIER.				
SCO #n	3	M-x\SI2-n	SPECIFY THE TYPE OF DATA ON				
DATA TYPE			THE SUBCARRIER:				
			PCM - 'PCM'				
			ANALOG - 'ANA'				
:			PAM - 'PAM'				
			OTHER - 'OTH'.				
MODULATION	3	M-x\SI3-n	SPECIFY THE MODULATION				
SENSE			SENSE:				
*			'POS' - INDICATES THAT AN				
			INCREASING VOLTAGE				
			RESULTS IN AN INCREASE				
			IN FREQUENCY				
			'NEG' - INDICATES THAT A				
			DECREASING VOLTAGE				
			RESULTS IN AN INCREASE				
			IN FREQUENCY.				

TABLE 9	4 (Cont'd). M	JLTIPLEX/M	ODULATION GROUP (M)				
	MAXIMUM						
PARAMETER	FIELD	CODE ·	DEFINITION				
	SIZE	NAME					
LOW PASS FILTER							
BANDWIDTH	6	M-x∖	SPECIFY THE LOW PASS FILTER				
		SIF1-n	CUTOFF FREQUENCY (3 dB), IN				
		,	kHz.				
TYPE	. 2	M-x\	SPECIFY THE FILTER TYPE:				
		SIF2-n	CONSTANT AMPLITUDE - 'CA'				
			CONSTANT DELAY - 'CD'				
•			OTHER - 'OT', DEFINE IN THE				
			COMMENTS RECORD.				
DATA LINK TYPE		ase Tues					
PCM OR PAM							
DATA LINK	32	M-x\SI\	SPECIFY THE DATA LINK NAME				
NAME		DLN-n	FOR PCM AND PAM DATA				
			FORMATS.				
ANALOG							
MEASUREMENT	32	M-x\SI\	GIVE THE MEASURAND NAME.				
NAME		MN-n					
REPEAT THE ABOY	VEFOR EACH	IRIG SUBCA	RRIER ON THIS CARRIER.				
OTHER	1	M-x\SO	ARE THERE NONSTANDARD				
			SUBCARRIERS?				
	1.		YES - 'Y', NO -'N'				
			DEFINE IN THE COMMENTS.				
REFERENCE	6	M-x\RC	FREQUENCY OF REFERENCE				
CHANNEL			CHANNEL IN kHz, IF				
			APPLICABLE.				
COMMENTS							
COMMENTS	3200	M-x\COM	PROVIDE THE ADDITIONAL				
			INFORMATION REQUIRED AND				
			ANY OTHER INFORMATION				
			DESIRED.				

- 9.5.6 <u>Digital Data Attributes</u>. The digital data attributes are separated into three groups containing PCM-related attribute information. The PCM Format Attributes Group (P) is described in subparagraph 9.5.6.1. The PCM Measurement Description Attributes, contained in (D), are described in subparagraph 9.5.6.2. Subparagraph 9.5.6.3 depicts the MIL-STD-1553 Bus Data attributes (B).
- 9.5.6.1 PCM Format Attributes (P). The PCM Format Attributes Group contains the information required to decommutate the PCM data stream. Operations of both class I and II are included. (Limited information is incorporated for class II operation.) Figure 9-6 presents the flow and summary of the information required. In general, only standard methods of synchronization have been included except for cases where considerable application is already in place. Inclusion should not be taken to mean that the nonstandard approaches are better or desired. Table 9-5 contains the PCM Format Attributes. The group defines and specifies the frame format and the information necessary to set up the PCM decommutation. Refer to chapter 4 for the definition of terms (such as major and minor frames and subframes) and word numbering conventions.

		CODE NAME	REFERENCE PAGE
DATA LINK NAME		(P-d\DLN)	(9-28)
	*INPUT DATA		(9-28)
	PCM CODE	(P-d\D1)	,
	BIT RATE	(P-d\D2)	
	ENCRYPTED	(P-d\D3)	
•	POLARITY	(P-d\D4)	
	AUTO-POLARITY CORRECTION	(P-d\D5)	
•	DATA DIRECTION	(P-d\D6)	
	DATA RANDOMIZED	(P-d\D7)	
	RANDOMIZER LENGTH	(P-d\D8)	
	FORMAT	(-) .	(9-29)
•	TYPE FORMAT	(P-d\TF)	(> 2)
	COMMON WORD LENGTH	(P-d\F1)	
	WORD TRANSFER ORDER	(P-d\F2)	
, -	PARITY	(P-d\F3)	•
	PARITY TRANSFER ORDER	(P-d\F4)	
	*MINOR FRAME	(1-014)	(9-30)
	NUMBER OF MINOR FRAMES IN MAJOR FRAME	(P-d\MF\N)	(5-30)
	NUMBER OF WORDS IN A MINOR FRAME	(P-d\MF1)	
	NUMBER OF BITS IN A MINOR FRAME	(P-d\MF2)	
	SYNC TYPE	(P-d\MF3)	(9-30)
	*SYNCRONIZATION PATTERN		·
	LENGTH	(P-d\MF4)	
•	PATTERN	(P-d\MF5)	
	*SYNCHRONIZATION CRITERIA	•	(9-30)
	IN SYNC CRITERIA	(P-d\SYNC1)	
	SYNC PATTERN CRITERIA	(P-d\SYNC2)	
	*OUT OF SYNCHRONIZATION CRITERIA		(9-31)
	NUMBER OF DISAGREES	(P-d\SYNC3)	
	SYNC PATTERN CRITERIA	(P-d\SYNC4)	
	*MINOR FRAME FORMAT DEFINITION		(9-31)
•	WORD NUMBER	(P-d\MFW1-n)	
	NUMBER OF BITS IN WORD	(P-d\MFW2-n)	
	*SUBFRAME SYNCHRONIZATION		(9-31)
	NUMBER OF SUBFRAME ID COUNTERS	(P-d\ISF\N)	
	SUBFRAME ID COUNTER NAME	(P-d\ISF1-n)	
	SUBFRAME SYNC TYPE	(P-d\ISF2-n)	
	*ID COUNTER		(9-32)

Figure 9-6. PCM Format Attributes Group (P).

•			SFID COUNTER LOCATION	(P-d\IDC1-n)	
•			IN COLUMN HICE THE CONT.		
•			ID COUNTER WORD LENGTH	(P-d\IDC2-n)	
•	1		ID COUNTER MSB STARTING BIT LOCATION	(P-d\IDC3-n)	
•			ID COUNTER LENGTH	(P-d\IDC4-n)	
			ID COUNTER TRANSFER ORDER	(P-d\IDC5-n)	
			ID COUNTER INITIAL VALUE	(P-d\IDC6-n)	(9-32)
<u>;</u>			INITIAL COUNT SUBFRAME NUMBER	(P-d\IDC7-n)	
	1		ID COUNTER END VALUE	(P-d\IDC8-n)	
			END COUNT SUBFRAME NUMBER	(P-d\IDC9-n)	
·			COUNT DIRECTION	(P-d\IDC10-n)	
	*SUI	BFRAME DE	FINITION		(9-32)
		NUMBER	OF SUBFRAMES	(P-d\SF\N-n)	
		SUBF	RAME NAME	(P-d\SF1-n-m)	
,		SUPE	RCOM	(P-d\SF2-n-m)	
		LOCA	ATION DEFINITION	(P-d\SF3-n-m)	
		SUBF	RAME LOCATION	(P-d\SF4-n-m-w)	
		INTE	RVAL	(P-d\SF5-n-m)	
		SUBF	RAME DEPTH	(P-d\SF6-n-m)	
	*AS	*ASYNCHRONOUS EMBEDDED FORMAT			(9-34)
		NUMBER OF ASYNCHRONOUS EMBEDDED FORMATS		(P-d\AEF\N)	
		DATA	A LINK NAME	(P-d\AEF\DLN-n)	(9-34)
		SUPE	ERCOM	(P-d\AEF1-n)	
·		LOCA	ATION DEFINITION	(P-d\AEF2-n)	:
			LOCATION	(P-d\AEF3-n-w)	
			INTERVAL	(P-d\AEF4-n)	(9-35)
		•	WORD LENGTH	(P-d\AEF5-n-w)	
	į		MASK	(P-d\AEF6-n-w)	
·	*FO	RMAT CHAI	NGE		(9-35)
		*FRAME I	FORMAT IDENTIFIER		
		LOC	ATION	(P-d\FFI1)	
		MAS	K	(P-d\FFI2)	
	OT	۱ <u></u>	REMENT LIST CHANGE	•	(9-36)
	OR		IBER OF MEASUREMENT LISTS	(P-d\MLC\N)	
	ŀ	FFI P	ATTERN	(P-d\MLC1-n)	
		МЕА	SUREMENT LIST NAME	(P-d\MLC2-n)	

Figure 9-6 (Cont'd). PCM Format Attributes Group (P).

		*	FOR	RMAT STRUCTURE CHANGE		(9-36)
				NUMBER OF FORMATS	(P-d\FSC\N)	(, , , ,
			.	FFI PATTERN	(P-d\FSC1-n)	
		*	Ì	DATA LINK ID	(P-d\FSC2-n)	
		*ALTE	RNA	TE TAG AND DATA		(9-36)
	Γ	ì	NUM	IBER OF TAGS	(P-d\ALT\N)	
		1	NUM	IBER OF BITS IN TAG	(P-d\ALT1)	
·		1	NUM	IBER OF BITS IN DATA WORD	(P-d\ALT2)	•
		I	FIRS'	T TAG LOCATION	(P-d\ALT3)	
			SEQU	UENCE	(P-d\ALT4)	
		*ASYN		RONOUS DATA MERGE		
				IBER OF ASYNCHRONOUS DATA GE FORMATS	(N/MQA/b-q)	
				DATA MERGE NAME	$(P-d\ADM\DMN-n)$	
				SUPERCOM	$(P-d\ADM1-n)$	
·				LOCATION DEFINITION	(P-d\ADM2-n)	
·				LOCATION	(P-d\ADM3-n)	
				INTERVAL	(P-d\ADM4-n)	
				DATA LENGTH	(P-d\ADM5-n)	
		MSB LOCATION			(P-d\ADM6-n)	
				PARITY	(P-d\ADM7-n)	
	*COMMENTS					
	L	COMM	1ENT	rs	(P-d\COM)	(9-38)
	*HEA	DING C	DNLY	Y - NO DATA ENTRY		

Figure 9-6 (Cont'd). PCM Format Attributes Group (P).

TA	BLE 9-5. PCM	FORMAT A	TTRIBUTES GROUP (P)
PARAMETER	MAXIMUM FIELD SIZE	CODE NAME	DEFINITION
DATA LINK NAME	32	P-d\DLN	IDENTIFY THE DATA LINK NAME CONSISTENT WITH THE MUX/MOD GROUP.
INPUT DATA.			
PCM CODE	6	P-d\D1	DEFINE THE DATA FORMAT CODE: 'NRZ-L' 'BIO-L' 'RNRZ-L' 'NRZ-M' 'BIO-M' 'OTHER' 'NRZ-S' 'BIO-S'
BIT RATE	9	P-d\D2	DATA RATE IN BITS PER SECOND. SCIENTIFIC NOTATION MAY BE USED.

TABLE 9-5 (Cont'd). PCM FORMAT ATTRIBUTES GROUP (P)					
	MAXIMUM				
PARAMETER	FIELD	CODE	DEFINITION		
	SIZE	NAME			
ENCRYPTED	1	P-d\D3	DATA IS ENCRYPTED -'E'		
•			DATA IS UNENCRYPTED - 'U'		
			IF THE DATA IS ENCRYPTED,		
			PROVIDE DETAILS IN COMMENT		
			RECORD.		
POLARITY	1	P-d\D4	DATA POLARITY:		
. 0 =			NORMAL - 'N'		
			INVERTED - 'I'.		
AUTO-POLARITY	1	P-d\D5	IS AUTOMATIC POLARITY		
CORRECTION			CORRECTION TO BE USED?		
COIdabollol	•		YES - 'Y' NO - 'N'		
DATA DIRECTION	1	P-d\D6	TIME SEQUENCE OF DATA:		
Dillibracia	- i		NORMAL - 'N'		
,			REVERSED - 'R'.		
DATA	1	P-d\D7	YES - 'Y' OR NO - 'N'.		
RANDOMIZED	_				
RANDOMIZER	3	P-d\D8	SPECIFY THE RANDOMIZER		
LENGTH	Ĭ		LENGTH:		
LENGIII			STANDARD (15 BITS) - 'STD'		
			OTHER - 'OTH', DEFINE IN		
	·		COMMENTS RECORD.		
• .			NOT APPLICABLE - 'N/A'.		
FORMAT	<u> </u>				
TYPE FORMAT	4	P-d\TF			
			TYPE OF PCM FORMAT:		
			CLASS I - 'ONE'		
			1553 BUS - '1553'		
	•		ALTERNATE TAG AND		
			DATA - 'ALTD'		
			OTHER - 'OTHR', DESCRIBE IN		
	4.4.4		COMMENTS RECORD.		
COMMON WORD	2	P-d\F1	NUMBER OF BITS IN COMMON		
LENGTH			WORD LENGTH.		
WORD TRANSFER	1	P-d\F2	DEFINE THE DEFAULT FOR THE		
ORDER			FIRST BIT TRANSFERRED IN		
01002			NORMAL TIME SEQUENCE:		
			MOST SIGNIFICANT BIT - 'M'		
		,	LEAST SIGNIFICANT BIT - 'L'.		

TABLE	9-5 (Cont'd). P	CM FORMAT	ATTRIBUTES GROUP (P)			
	MAXIMUM					
PARAMETER	FIELD	CODE	DEFINITION			
	SIZE	NAME	ŗ			
PARITY	2	P-d\F3	NORMAL WORD PARITY			
			EVEN - 'EV'			
			ODD - 'OD'			
			NONE - 'NO'			
PARITY	1	P-d\F4	PARITY BIT LOCATION			
TRANSFER			LEADS WORD - 'L'			
ORDER			TRAILS WORD - 'T'.			
MINOR FRAME						
NUMBER OF	3	P-d\MF\N	NUMBER OF MINOR FRAMES IN			
MINOR FRAMES		1	A MAJOR FRAME.			
IN MAJOR		'				
FRAME						
NUMBER OF	4	P-d\MF1	SPECIFY THE NUMBER OF			
WORDS IN A		[WORDS IN A MINOR FRAME, AS			
MINOR FRAME			DEFINED IN PARAGRAPH 4.3.			
NUMBER OF	5	P-d\MF2	NUMBER OF BITS IN A MINOR			
BITS IN A			FRAME INCLUDING MINOR			
MINOR FRAME		1	FRAME SYNCHRONIZATION			
			PATTERN.			
SYNC TYPE	3	P-d\MF3	DEFINE MINOR FRAME			
			SYNCHRONIZATION TYPE:			
			FIXED PATTERN - 'FPT'			
			OTHER - 'OTH'.			
SYNCHRONIZATION PATTERN						
LENGTH	2	P-d\MF4	SPECIFY THE MINOR FRAME			
,			SYNCHRONIZATION PATTERN			
			LENGTH IN NUMBER OF BITS.			
PATTERN	33	P-d\MF5	DEFINE MINOR FRAME			
			SYNCHRONIZATION PATTERN IN			
	•	·	BITS ("1"s and "0"s) WITH THE			
			LEFT MOST BIT AS THE "FIRST			
			BIT TRANSMITTED."			
SYNCHRONIZATION CRITERIA						
IN SYNC	2	P-d\SYNC1	THIS SPECIFIES THE DESIRED			
CRITERIA			CRITERIA FOR DECLARING THE			
			SYSTEM TO BE IN SYNC:			
			FIRST GOOD SYNC - 0			
			CHECK - NUMBER OF AGREES			
			(1 OR GREATER)			
			NOT SPECIFIED - 'NS'.			

TABLE 9-5	(Cont'd). Po		TTRIBUTES GROUP (P)
	MAXIMUM		
PARAMETER	FIELD SIZE	NAME	DEFINITION
SYNC PATTERN	2	P-d\SYNC2	NUMBER OF BITS THAT
CRITERIA			MAY BE IN ERROR IN THE
			SYNCHRONIZATION PATTERN.
OUT OF SYNCHRO	NIZATION	CRITERIA	
NUMBER OF	2	P-d\SYNC3	SPECIFIES THE DESIRED
DISAGREES			CRITERIA FOR DECLARING
			THE SYSTEM OUT OF SYNC:
			NUMBER OF DISAGREES,
		_	NOT SPECIFIED - 'NS'.
SYNC PATTERN	2	P-d\SYNC4	NUMBER OF BITS THAT MAY
CRITERIA			BE IN ERROR IN THE
			SYNCHRONIZATION PATTERN.
MINOR FRAME FO	RMAT DEF	INITION	
WORD NUMBER	4	P-d\MFW1-n	WORD POSITION (#n) IN A
			MINOR FRAME, OR FOR
			CLASS II SYSTEMS, THE
			POSITION IN THE DEFINED
			FRAME. WORD POSITION 1
			FOLLOWS THE
			SYNCHRONIZATION
	ļ.		PATTERN.
NUMBER OF BITS	2	P-d\MFW2-n	THE NUMBER OF BITS IN
IN WORD	- -		WORD POSITION #n. IF
IN WORD			DEFAULT VALUE, DO NOT
•		·	INCLUDE.
AND COMALDY AND COMPANY OF A DIAM IN A	I Seid Milisides		R ALL WORDS THAT HAVE A
18:573(9]:00,000,000,000,000,000,000,000,000,000		DMMON WORL	LENGTH. THEREFORE, ALL
MODE DOCUMENTS	NATURATUR	DED IN THE A	BOVE WILL HAVE THE
COMMON WORD I			
SUBFRAME SYNC			N
Tari, Tari, 1991, Adam at 1991, 1991, 1991, 1991, 1991, 1991, 1991, 1991, 1991, 1991, 1991, 1991, 1991, 1991,			SPECIFY THE NUMBER OF
NUMBER OF	2	P-d\ISF\N	SUBFRAME ID COUNTERS
SUBFRAME	<u>.</u>		DEFINED WITHIN THE MINOR
ID COUNTERS			
			FRAME.
SUBFRAME ID	32	P-d\ISF1-n	SPECIFY THE SUBFRAME ID
COUNTER NAME			COUNTER NAME.
SUBFRAME SYNC	2	P-d\ISF2-n	DEFINE THE SUBFRAME
TYPE			SYNCHRONIZATION TYPE:
			ID COUNTER - 'ID'
			OTHER - 'OT', DEFINE IN
	ļ ·		COMMENTS.



TABLE 9-5 (Cont'd). PCM FORMAT ATTRIBUTES GROUP (P)					
	MAXIMUM	·			
PARAMETER	FIELD	CODE	DEFINITION		
· 	SIZE	NAME			
ID COUNTER					
SUBFRAME ID	4	P-d\IDC1-n	IF ID COUNTER IS DESIGNATED		
COUNTER			AS THE SUBFRAME SYNC TYPE,		
LOCATION			GIVE THE MINOR FRAME WORD		
			POSITION OF THE COUNTER.		
ID COUNTER	2	P-d\IDC2-n	SPECIFY THE MINOR FRAME		
WORD LENGTH		<u> </u>	WORD LENGTH OF THE WORD		
			CONTAINING THE ID COUNTER,		
			NUMBER OF BITS.		
ID COUNTER	2	P-d\IDC3-n	SPECIFY THE BIT LOCATION OF		
MSB STARTING			THE ID COUNTER MSB WITHIN		
BIT LOCATION			THE WORD.		
ID COUNTER	2	P-d\IDC4-n	SPECIFY THE SUBFRAME ID		
LENGTH			COUNTER LENGTH. NUMBER		
	ł		OF BITS.		
ID COUNTER	1	P-d\IDC5-n	SPECIFY WHETHER THE MOST		
TRANSFER			OR LEAST SIGNIFICANT BIT IS		
ORDER			TRANSFERRED FIRST:		
			MOST SIGNIFICANT - 'M'		
			LEAST SIGNIFICANT - 'L'.		
ID COUNTER	3	P-d\IDC6-n	SPECIFY THE INITIAL VALUE OF		
INITIAL VALUE			THE ID COUNTER.		
INITIAL COUNT	3	P-d\IDC7-n	SPECIFY THE MINOR FRAME		
SUBFRAME			NUMBER ASSOCIATED WITH		
NUMBER			THE INITIAL COUNT VALUE.		
ID COUNTER	3	P-d\IDC8-n	SPECIFY THE END VALUE OF		
END VALUE			THE ID COUNTER.		
END COUNT	3	P-d\IDC9-n	SPECIFY THE MINOR FRAME		
SUBFRAME			NUMBER ASSOCIATED WITH		
NUMBER	·		THE END COUNT VALUE.		
COUNT	3	P-d\	SPECIFY THE DIRECTION OF THE		
DIRECTION		IDC10-n	COUNT INCREMENT:		
			INCREASING - 'INC'		
			DECREASING - 'DEC'		
SUBFRAME DEF	INITION				
NUMBER OF	4	P-d\SF\	SPECIFY THE NUMBER OF		
SUBFRAMES		N-n	SUBFRAMES ASSOCIATED		
			WITH THE SUBFRAME ID		
			COUNTER NAMED ABOVE.		

TABLE	9-5 (Cont'd). I	CM FORMAT	ATTRIBUTES GROUP (P)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	·
SUBFRAME	32	P-d\SF1-	SPECIFY THE SUBFRAME NAME.
NAME		n-m	
SUPERCOM	2	P-d\SF2-	IF NOT SUPERCOMMUTATED,
		n-m	ENTER - 'NO'. OTHERWISE,
			ENTER THE NUMBER OF
-			WORD POSITIONS.
LOCATION	2	P-d\SF3-	IF SUPERCOMMUTATED,
DEFINITION		n-m	SPECIFY HOW THE WORD
			LOCATIONS ARE DEFINED:
· · · · · · · · · · · · · · · · · · ·	·		FIRST WORD AND
			INTERVAL - 'FI'
			EVERY LOCATION - 'EL'
			NOT APPLICABLE - 'NA'
SUBFRAME	4	P-d\SF4-	SPECIFY THE FIRST WORD
LOCATION		n-m-w	WITHIN THE MINOR FRAME
			THAT CONTAINS THE
		Į.	SUBFRAME IDENTIFIED. FOR
			THE CASE WHEN EVERY
		ļ	WORD LOCATION IS DEFINED,
			REPEAT THIS ENTRY FOR
			EACH WORD POSITION
			APPLICABLE. FOR THE FIRST
			WORD AND INTERVAL,
•			INCLUDE THE NEXT ENTRY TO
			DEFINE THE INTERVAL.
INTERVAL	4	P-d\SF5-	SPECIFY THE INTERVAL TO BE
		n-m	USED TO DEFINE THE
			SUBFRAME LOCATION.
SUBFRAME	3	P-d\SF6-	SPECIFY THE SUBFRAME
DEPTH		n-m	DEPTH. IF NO ENTRY, THEN
			THE SUBFRAME ID COUNTER
			DEPTH WILL BE USED AS THE
,			DEFAULT VALUE.
REPEATETE AT	OVE FOR EAC	H SUBFRAM	E IN THE MINOR FRAME FORMAT.



TABLE 9-	5 (Cont'd), PC	M FORMAT A	ATTRIBUTES GROUP (P)			
	MAXIMUM					
PARAMETER	FIELD	CODE	DEFINITION			
	SIZE	NAME				
ASYNCHRONOUS I	ASYNCHRONOUS EMBEDDED FORMAT					
NUMBER OF	1	P-d\AEF\N	SPECIFY THE NUMBER OF			
ASYNCHRONOUS			ASYNCHRONOUS EMBEDDED			
EMBEDDED			FORMATS:			
FORMATS			ONE - '1' TWO -'2'			
			NONE - '0'			
DATA LINK	32	P-d\AEF\	PROVIDE THE DATA LINK			
NAME		DLN-n	NAME FOR THIS			
			ASYNCHRONOUS			
			EMBEDDED FORMAT. REPEAT			
			NAME AND THE FOLLOWING			
			ENTRIES FOR THE SECOND			
			FORMAT, AS APPROPRIATE. (A			
			SEPARATE DATA LINK			
			DEFINITION MUST BE			
. •		·	PROVIDED FOR EACH			
			ASYNCHRONOUS EMBEDDED			
			FORMAT.)			
SUPERCOM	3	P-d\AEF1-n	IF THE ASYNCHRONOUS			
			FORMAT IS NOT			
	· ·		SUPERCOMMUTATED,			
			ENTER - 'NO' . OTHERWISE,			
· ·			ENTER THE NUMBER OF HOST			
· ·			MINOR FRAME WORDS THAT			
	·		ARE USED.			
LOCATION	2	P-d\AEF2-n	IF SUPERCOMMUTATED,			
DEFINITION			SPECIFY HOW THE WORD			
			LOCATIONS ARE DEFINED:			
			FIRST WORD AND			
Ì			INTERVAL - 'FI'			
			EVERY LOCATION - 'EL'			
			CONTIGUOUS WORDS - 'CW'			
	1.		NOT APPLICABLE - 'NA'			

TABLE	9-5 (Cont'd).	PCM FORMAT	ATTRIBUTES GROUP (P)
t special plants and the second special specia	MAXIMUM	An american Supplies as a second property	And property of the second sec
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
LOCATION	. 4	P-d\AEF3-n-w	SPECIFY THE FIRST WORD
			WITHIN THE MINOR FRAME
			THAT CONTAINS THE
		٠.	ASYNCHRONOUS EMBEDDED
,	*		FORMAT IDENTIFIED. FOR THE
			METHOD WHEN EVERY WORD
			LOCATION IS DEFINED, REPEAT
		·	THIS ENTRY FOR EACH WORD
			POSITION APPLICABLE. FOR
			THE FIRST WORD AND
	•	·	INTERVAL METHOD, INCLUDE
			THE NEXT ENTRY TO DEFINE
			THE INTERVAL.
INTERVAL	. 4	P-d\AEF4-n	SPECIFY THE INTERVAL TO BE
			USED TO DEFINE THE
			ASYNCHRONOUS EMBEDDED
			FORMAT LOCATION.
WORD LENGTH	2	P-d\AEF5-n-w	SPECIFY THE NUMBER OF
			EMBEDDED BITS IN THIS HOST
			WORD LOCATION.
MASK	64	P-d\AEF6-n-w	IF THE ASYNCHRONOUS
			PORTION OF THE WORD IS
			SHORTER THAN THE WORD
			LENGTH, THEN PROVIDE THE
			BINARY MASK REQUIRED TO
	•		INDICATE WHICH BITS ARE
			USED (1s USED, 0s NOT USED).
			LEFTMOST BIT CORRESPONDS
			TO FIRST BIT TRANSMITTED.
FORMAT CHAN	GE		
FRAME FORMA	TIDENTIFIE	R	
LOCATION	4	P-d\FFI1	SPECIFY THE POSITION IN THE
			MINOR FRAME THAT CONTAINS
			THE FRAME FORMAT
			IDENTIFICATION (FFI) WORD. IF
		·	MORE THAN ONE WORD
			LOCATION, PROVIDE THE
			DETAILS IN THE COMMENTS
	•		RECORD.
		·	

TABLE	9-5 (Cont'd).	PCM FORMA	T ATTRIBUTES GROUP (P)
•	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
MASK	64	P-d\FFI2	IF THE FFI IS SHORTER THAN THE
		1	WORD LENGTH, THEN PROVIDE
			THE BINARY MASK REQUIRED TO
			INDICATE WHICH BITS ARE USED.
			LEFTMOST BIT CORRESPONDS TO
		,	FIRST BIT TRANSMITTED.
MEASUREMENT	LIST CHANG	E	
NUMBER OF	2	P-d\MLC\N	SPECIFY THE NUMBER OF
MEASUREMENT			MEASUREMENT LISTS THAT ARE
LISTS			REQUIRED TO BE SELECTED. IF
	,		NONE, ENTER 'NO'. OTHERWISE,
			ENTER THE NUMBER, n.
FFI PATTERN	16	P-d/MLC1-n	SPECIFY THE FFI PATTERN THAT
			CORRESPONDS TO THE
			MEASUREMENT LIST (1s and 0s).
			THIS ENTRY AND THE NEXT ARE
	:		AN ORDERED PAIR.
MEASUREMENT	32	P-d\MLC2-n	SPECIFY THE MEASUREMENT LIST
LIST NAME			NAME.
FORMAT STRUC	TURE CHAN	GE	
NUMBER OF	2	P-d\FSC\N	SPECIFY NUMBER OF FORMATS
FORMATS			THAT ARE TO BE DEFINED.
FFI PATTERN	16	P-d\FSC1-n	SPECIFY THE FFI PATTERN THAT
			CORRESPONDS TO THE FORMAT
			THAT IS DEFINED. THIS ENTRY
			AND THE FOLLOWING ARE AN
			ORDERED PAIR.
DATA LINK ID	32	P-d\FSC2-n	IDENTIFY THE FORMAT THAT
			CORRESPONDS TO THIS FFI CODE.
ALTERNATE TA			
NUMBER OF	3	P-d\ALT\N	SPECIFY THE NUMBER OF
TAGS			PARAMETERS THAT ARE
			INCLUDED WITHIN THIS
			CATEGORY, THAT IS, THE
			NUMBER OF TAGS.

TABLE)-5 (Cont'd).	PCM FORMAT A	FTRIBUTES GROUP (P)
	MAXIMUM	CODE	
PARAMETER	FIELD SIZE	NAME	DEFINITION
NUMBER OF	2	P-d\ALT1	SPECIFY THE NUMBER OF
BITS IN TAG			BITS THAT ARE IN THIS TAG.
NUMBER OF	2	P-d\ALT2	SPECIFY THE NUMBER OF
BITS IN DATA			BITS THAT ARE IN THE
WORD			COMMON DATA WORD.
FIRST TAG	2	P-d\ALT3	IDENTIFY THE LOCATION OF
LOCATION			THE START OF THE FIRST TAG
		,	LOCATION IN TERMS OF BITS,
			WITH THE FIRST BIT POSITION
			AFTER THE SYNCHRONIZATION
			PATTERN BEING NUMBER 1.
SEQUENCE	1	P-d\ALT4	IF THE TAG/DATA WORD
			SEQUENCE IS TAG, THEN
			DATA ENTER 'N' FOR
			NORMAL. IF THE DATA
			PRECEDES THE TAG, ENTER
			'R' FOR REVERSED.
ASYNCHRONOUS	DATA ME	RGE FORMAT	
NUMBER OF	1	P-d\ADM\N	SPECIFY THE NUMBER OF
ASYNCHRONOUS			ASYNCHRONOUS DATA
DATA MERGE			MERGE FORMATS.
FORMATS			
ASYNCHRONOUS	32	P-d\ADM\DMN-n	PROVIDE THE DATA MERGE
DATA MERGE			NAME FOR THIS
NAME	,		ASYNCHRONOUS DATA
			MERGE FORMAT. THIS CAN
			BE USED TO IDENTIFY THE
			SOURCE OF THE DATA MERGE
·		,	FORMAT, AS APPROPRIATE.
			(USE THE COMMENTS FIELD
			TO DESCRIBE THIS DATA
			SOURCE FOR THE
		,	ASYNCHRONOUS DATA
	,		MERGE FORMAT.)
SUPERCOM	3	P-d\ADM1-n	IF THE ASYNCHRONOUS
			DATA MERGE FORMAT IS
			NOT SUPERCOMMUTATED,
			ENTER - 'NO'. OTHERWISE,
			ENTER THE NUMBER OF HOST
			MINOR FRAME WORDS THAT
			ARE USED.

TABLE	9-5 (Cont'd). F	CM FORMAT	ATTRIBUTES GROUP (P)
PARAMETER	MAXIMUM FIELD	CODE	DEFINITION
T O C A PETON	SIZE	NAME	IF GUIDED COM ALTE ATED
LOCATION	2	P-d\ADM2-	IF SUPERCOMMUTATED,
DEFINITION		n	SPECIFY HOW THE WORD
			LOCATIONS ARE DEFINED:
		·	FIRST WORD AND
	•		INTERVAL - 'FI'
		,	EVERY LOCATION - 'EL'
			CONTIGUOUS WORDS - 'CW'
			NOT APPLICABLE - 'NA'
LOCATION	4	P-d\ADM3-	SPECIFY THE FIRST WORD
		n-w	WITHIN THE MINOR FRAME
			THAT CONTAINS THE
			ASYNCHRONOUS DATA MERGE
			FORMAT IDENTIFIED. FOR THE
			METHOD WHEN EVERY WORD
			LOCATION IS DEFINED, REPEAT
			THIS ENTRY FOR EACH WORD
			POSITION APPLICABLE. FOR
			THE FIRST WORD AND
•			INTERVAL METHOD, INCLUDE
			THE NEXT ENTRY TO DEFINE
			THE INTERVAL.
INTERVAL	4	P-d\ADM4-	SPECIFY THE INTERVAL TO BE
		n	USED TO DEFINE THE
			ASYNCHRONOUS DATA MERGE
	<u> </u>		FORMAT LOCATION.
DATA LENGTH	2	P-d\ADM5-	SPECIFY THE NUMBER OF DATA
		n	BITS USED IN THIS DATA MERGE
		7 11 17 16	FORMAT.
MSB	2	P-d\ADM6-	PROVIDE THE MOST
LOCATION		n ·	SIGNIFICANT BIT (MSB)
			POSITION WITHIN THE HOST
		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	MINOR FRAME LOCATION.
PARITY	2	P-d\ADM7-	IF USED, SPECIFY THE PARITY
		n	INFORMATION:
			EVEN - 'EV', ODD - 'OD',
00100	1	1	NONE - 'NO' .
COMMENTS	T (400	In vocat	
COMMENTS .	6400	P-d\COM	PROVIDE ANY ADDITIONAL
			REQUIRED OR DESIRED
			INFORMATION.

9.5.6.2 <u>PCM Measurement Description (D)</u>. Table 9-6 and figure 9-7 contain the PCM Measurement Descriptions. The descriptions define each measurand or data item of interest within the frame format specified in the PCM attributes. Table 9-6 includes the measurement name, which links the measurement to the Data Conversion Attributes Group.

				CODE NAME	REFERENCEF AGE
DATA LINK NAME				(D-x\DLN)	(9-42)
	NUMBER	OF ME	ASUREMENT LISTS	$(D-x\ML\N)$	•
	MEASURI	EMENT	LIST NAME	(D-x\MLN-y)	
	NUMBER	OF ME	ASURANDS	(D-x\MN\N-y)	
	MEASURI	EMEN'I	NAME	(D-x\MN-y-n)	(9-42)
	PAI	RITY		(D-x\MN1-y-n)	
	PAI	RITY T	RANSFER ORDER	(D-x\MN2-y-n)	
	ME	ASURI	EMENT TRANSFER ORDER	(D-x\MN3-y-n)	
	*M	EASUR	EMENT LOCATION		(9-43)
		MEA	SUREMENT LOCATION TYPE	(D-x\LT-y-n)	
		*MIN	IOR FRAME	,	(9-43)
			MINOR FRAME LOCATION	(D-x\MF-y-n)	` ,
			BIT MASK	(D-x\MFM-y-n)	
		*MIN	IOR FRAME SUPERCOMMUTATED	(= 1.1.1.1.1.1, 1.1)	(9-43)
	OI	R —	NUMBER OF MINOR FRAME LOCATIONS	(D-x\MFS\N-y-n)	
			LOCATION DEFINITION	(D-x\MFS1-y-n)	
			*INTERVAL		(9-44)
		OR			` ,
			LOCATION IN MINOR FRAME	(D-x\MFS2-y-n)	
			BIT MASK	(D-x\MFS3-y-n)	
			INTERVAL	(D-x\MFS4-y-n)	
			*EVERY LOCATION		
			MINOR FRAME LOCATION	(D-x\MFSW-y-n-e)	
			BIT MASK	(D-x\MFSM-y-n-e)	
		*MR	NOR FRAME FRAGMENTED		(9-45)
	· 0	Ŗ —	1 :		•
		Ì	NUMBER OF FRAGMENTS	$(D-x\FMF\N-y-n)$	
			MEASUREMENT WORD LENGTH	(D-x\FMF1-y-n)	
			LOCATION DEFINITION	(D-x\FMF2-y-n)	
			*INTERVAL		
		OR	ı •		
			LOCATION IN MINOR FRAME	(D-x\FMF3-y-n)	
	. "		BIT MASK	(D-x\FMF4-y-n)	
			INTERVAL	(D-x\FMF5-y-n)	
		1	*EVERY LOCATION		(9-45)
			MINOR FRAME LOCATION	(D-x\FMF6-y-n-e)	
			BIT MASK	(D-x\FMF7-y-n-e)	
			FRAGMENT TRANSFER ORDER	(D-x\FMF8-y-n-e)	
		1	FRAGMENT POSITION	(D-x\FMF9-y-n-e)	

Figure 9-7. PCM Measurement Description Group (D).

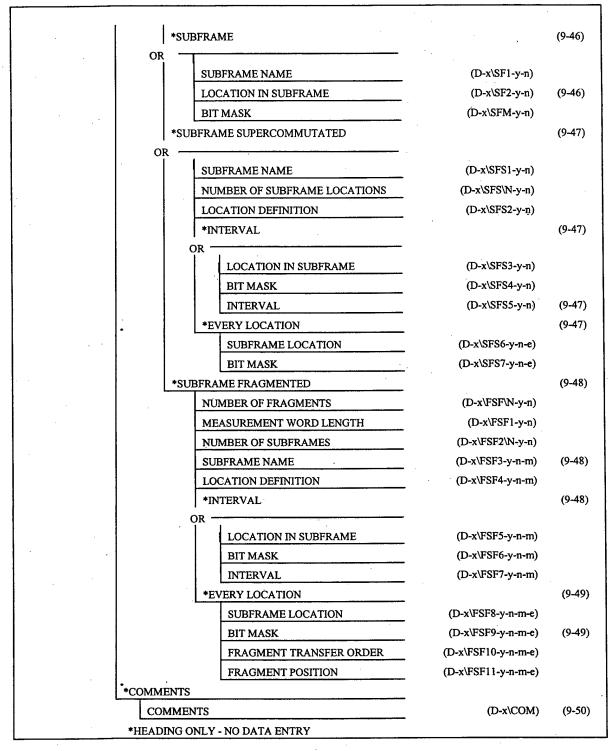


Figure 9-7 (Cont'd). PCM Measurement Description Group (D).

TABLE 9-6. PCM MEASUREMENT DESCRIPTION GROUP (D)					
	MAXIMUM				
PARAMETER	FIELD	CODE	DEFINITION		
	SIZE	NAME			
DATA LINK	32	D-x\DLN	PROVIDE THE DATA LINK NAME.		
NAME					
NUMBER OF	2	D-x\ML\N	SPECIFY THE NUMBER OF		
MEASUREMENTS			MEASUREMENTS LISTS TO BE		
LISTS			PROVIDED.		
MEASUREMENT	32	D-x\MLN-y	PROVIDE THE MEASUREMENT LIST		
LIST NAME			NAME ASSOCIATED WITH		
			THE FOLLOWING ATTRIBUTES.		
			THE FOLLOWING INFORMATION		
			WILL HAVE TO BE REPEATED FOR		
			EACH MEASUREMENT LIST		
			IDENTIFIED IN THE PCM FORMAT		
			ATTRIBUTES GROUP.		
NUMBER OF	4	D-x\MN\	SPECIFY THE NUMBER OF		
MEASURANDS		N-y	MEASURANDS INCLUDED WITHIN		
			THIS MEASUREMENT LIST.		
MEASUREMENT	.32	D-x\MN-	MEASURAND NAME.		
NAME		y-n			
PARITY	2	D-x\MN1-	SPECIFY PARITY:		
		y-n	EVEN - 'EV' ODD - 'OD'		
			NONE - 'NO'		
			DEFAULT TO MINOR FRAME		
. •			DEFINITION - 'DE'.		
PARITY	1	D-x\MN2-	PARITY BIT LOCATION		
TRANSFER		y-n	LEADS WORD - 'L'		
ORDER			TRAILS WORD - 'T'		
		7 // 572	MINOR FRAME DEFAULT - 'D'.		
MEASUREMENT	. 1	D-x\MN3-	MOST SIGNIFICANT BIT FIRST - M'		
TRANSFER		y-n	LEAST SIGNIFICANT BIT FIRST - 'L'		
ORDER			DEFAULT - 'D'.		

TABLE 9-	TABLE 9-6 (Cont'd). PCM MEASUREMENT DESCRIPTION GROUP (D)				
	MAXIMUM				
PARAMETER	FIELD	CODE	DEFINITION		
	SIZE	NAME	·		
MEASUREMENT	LOCATION				
MEASUREMENT	4	D-x\LT-y-n	SPECIFY THE NATURE OF THE		
LOCATION	•		LOCATION OF THIS MEASURAND.		
TYPE	-		MINOR FRAME - 'MF'		
	• .		MINOR FRAME		
·			SUPERCOMMUTATED - MFSC'		
			MINOR FRAME		
			FRAGMENTED - 'MFFR'		
			SUBFRAME - 'SF'		
		·	SUBFRAME		
			SUPERCOMMUTATED - 'SFSC'		
			SUBFRAME FRAGMENTED -'SFFR'.		
MINOR FRAME		<u>L </u>	The state of the s		
MINOR FRAME	4	D-x\MF-y-n	THE MINOR FRAME WORD POSITION		
LOCATION			OF THE MEASUREMENT.		
BIT MASK	64	D-x\MFM-	BINARY STRING OF 1s and 0s TO		
		y-n	IDENTIFY THE BITS IN A WORD		
			LOCATION THAT ARE ASSIGNED TO		
			THIS MEASUREMENT. IF THE FULL		
			WORD IS USED FOR THIS		
			MEASUREMENT, ENTER - 'FW'.		
			LEFTMOST BIT CORRESPONDS TO		
			FIRST BIT TRANSMITTED.		
MINOR FRAME S	UPERCOMM	UTATED			
NUMBER OF	4	D-x\MFS\	NUMBER OF WORD POSITIONS THAT		
MINOR FRAME		N-y-n	THE SUPERCOMMUTATED CHANNEL		
LOCATIONS			OCCUPIES, N.		
LOCATION	1	D-x\MFS1-	TO SPECIFY THE INTERVAL,		
DEFINITION		y-n	ENTER - 'I'.		
			TO SPECIFY EVERY WORD		
			LOCATION, ENTER - 'E'.		

TABLE 9-6	TABLE 9-6 (Cont'd). PCM MEASUREMENT DESCRIPTION GROUP (D)				
	MAXIMUM				
PARAMETER	FIELD	CODE	DEFINITION		
	SIZE	NAME	·		
INTERVAL			And the second s		
LOCATION IN	4	D-x\MFS2-	SPECIFY THE FIRST WORD		
MINOR FRAME		y-n	LOCATION IN THE MINOR		
			FRAME.		
BIT MASK .	64	D-x\MFS3-	BINARY STRING OF 1s AND 0s TO		
		y-n	IDENTIFY THE BITS IN A WORD		
			LOCATION THAT ARE ASSIGNED		
			TO THIS SUPERCOMMUTATED		
			MEASUREMENT. IF THE FULL		
			WORD IS USED FOR THIS		
			MEASUREMENT, ENTER - 'FW'.		
		!	LEFT MOST BIT CORRESPONDS		
			TO FIRST BIT TRANSMITTED.		
INTERVAL	3	D-x\MFS4-	SPECIFY THE INTERVAL COUNT		
INTERVAL		y-n	THAT IS THE OFFSET FROM THE		
		' ' '	FIRST WORD LOCATION AND		
	·		EACH SUBSEQUENT LOCATION.		
EVERY LOCATI	ION				
MINOR FRAME	4	D-x\MFSW	ENTER THE MINOR FRAME		
LOCATION		-y-n-e	WORD POSITION OF THE		
			MEASUREMENT.		
BIT MASK	64	D-x\MFSM	BINARY STRING OF 1s AND 0s TO		
		-y-n-e	IDENTIFY THE BITS IN A WORD		
		-	LOCATION THAT ARE ASSIGNED		
•			TO THIS SUPERCOMMUTATED		
			MEASUREMENT. IF THE FULL		
•			WORD IS USED FOR THIS		
			MEASUREMENT, ENTER - 'FW'.		
		-	LEFT MOST BIT CORRESPONDS		
			TO FIRST BIT TRANSMITTED.		
ENDER THE MIN	OR BRAMBIL	OCATION AND	BIT MASK FOR EACH OF THE		
WORD POSITIO	WORD POSITIONS THAT THE SUPERCOMMUTATED CHANNEL OCCUPIES, (N)				
LOCATIONS.			The second s		

TABLE 9-6	(Cont'd). PCM	MEASUREME	NT DESCRIPTION GROUP (D)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
MINOR FRAME I	RAGMENTED		
NUMBER OF	1	D-x\FMF\	NUMBER OF MINOR FRAME
FRAGMENTS	*	N-y-n	WORD POSITIONS THAT THE
			FRAGMENTED CHANNEL
			OCCUPIES, N.
MEASUREMENT	3	D-x\FMF1-	TOTAL LENGTH OF THE
WORD LENGTH		y-n	RECONSTRUCTED BINARY
			DATA WORD.
LOCATION	1	D-x\FMF2-	TO SPECIFY THE INTERVAL,
DEFINITION		y-n	ENTER - 'I'.
		·	TO SPECIFY EVERY WORD
			LOCATION, ENTER - 'E'.
INTERVAL			
LOCATION IN	4	D-x\FMF3-	SPECIFY THE FIRST WORD
MINOR FRAME		y-n	POSITION THAT THE
•			FRAGMENTED WORD OCCUPIES
			IN THE MINOR FRAME.
BIT MASK	64	D-x\FMF4-	BINARY STRING OF 1s AND 0s
		y-n	TO IDENTIFY THE BITS IN A
			WORD POSITION THAT ARE
			ASSIGNED TO THIS
			FRAGMENTED CHANNEL. IF
			THE FULL WORD IS USED FOR
			THIS MEASUREMENT, ENTER
			'FW'. LEFT MOST BIT CORRESPONDS TO FIRST BIT
			1
DWDDX	1	D -/E3 405	TRANSMITTED. SPECIFY THE INTERVAL THAT
INTERVAL	4	D-x\FMF5-	IS THE OFFSET FROM THE FIRST
		y-n	WORD LOCATION AND EACH
			SUBSEQUENT LOCATION.
TONIANI DAZITEO ZORAZINI	DNI		Laubaequent Lucation.
EVERY LOCATION		D\ENGE	ENTER THE MINOR FRAME
MINOR FRAME	4	D-x\FMF6-	WORD POSITION OF THE
LOCATION		y-n-e	MEASUREMENT.
•			WEASUREMENT.

TABLE 9	TABLE 9-6 (Cont'd). PCM MEASUREMENT DESCRIPTION GROUP (D)					
	MAXIMUM					
PARAMETER	FIELD	CODE	DEFINITION			
	SIZE	NAME				
BIT MASK	64	D-x\FMF7-	BINARY STRING OF 1s AND 0s TO			
·		y-n-e	IDENTIFY THE BITS IN A WORD			
			POSITION THAT ARE ASSIGNED TO			
			THIS FRAGMENTED			
	ļ		MEASUREMENT. IF THE FULL			
			WORD IS USED FOR THIS			
			MEASUREMENT, ENTER - 'FW'.			
			LEFT MOST BIT CORRESPONDS TO			
			FIRST BIT TRANSMITTED.			
FRAGMENT	1	D-x\FMF8-	MOST SIGNIFICANT BIT FIRST - 'M'			
TRANSFER		y-n-e	LEAST SIGNIFICANT BIT FIRST - 'L'			
ORDER			DEFAULT - 'D'.			
FRAGMENT	1	D-x\FMF9-	A NUMBER FROM 1 TO N			
POSITION		y-n-e	SPECIFYING POSITION OF THE			
			FRAGMENT WITHIN THE			
	·	·	RECONSTRUCTED BINARY DATA			
•			WORD. (1 CORRESPONDS TO MOST			
,			SIGNIFICANT FRAGMENT).			
	ENTER THE MINOR FRAME LOCATION AND BIT MASK FOR EACH OF THE					
WORD POSIT	WORD POSITIONS THAT THE FRAGMENTED CHANNEL OCCUPIES, (N)					
LOCATIONS.						
SUBFRAME						
CYTOTED A DATE	22	D -\CE1	ENTED THE CLIDED AME NAME			



LOCATIONS.			
SUBFRAME			
SUBFRAME	32	D-x\SF1-	ENTER THE SUBFRAME NAME.
NAME		y-n	
LOCATION	3	D-x\SF2-	SPECIFY THE WORD NUMBER IN
IN .		y-n	THE SUBFRAME.
SUBFRAME			
BIT MASK	64	D-x\SFM-	BINARY STRING OF 1s AND 0s TO
		y-n	IDENTIFY THE BITS IN A WORD
			LOCATION THAT ARE ASSIGNED
	4		TO THIS MEASUREMENT. IF THE
			FULL WORD IS USED FOR THE
			MEASUREMENT, ENTER - 'FW'.
		•	LEFT MOST BIT CORRESPONDS TO
			FIRST BIT TRANSMITTED.

TABLE 9-6 (0	Cont'd). PCM N	MEASUREME	NT DESCRIPTION GROUP (D)
Vine all was a market and short services and the services of t	MAXIMUM	un agrania meta partirum ya tunisti, disepetikian dhi ini ushini tu	The second second is a second
PARAMETER	FIELD	CODE	DEFINITION
·	SIZE	NAME	
SUBFRAME SUPI	<u> </u>		
SUBFRAME	32	D-x\SFS1-	ENTER THE SUBFRAME NAME.
NAME	32	y-n	ENTER THE SOBIRUME TO EVIE.
NAME		y-11	
NUMBER OF	3	D-x\SFS\	NUMBER OF SUBFRAME
SUBFRAME		N-y-n	WORD POSITIONS THAT THE
LOCATIONS	·		SUPERCOMMUTATED
2001			CHANNEL OCCUPIES.
LOCATION	1	D-x\SFS2-	TO SPECIFY:
DEFINITION		y-n	INTERVAL ENTER - 'I'
			EVERY WORD ENTER - 'E'.
INTERVAL	1		
LOCATION IN	3	D-x\SFS3-	SPECIFY THE FIRST WORD
SUBFRAME		y-n	POSITION THAT THE
			SUPERCOMMUTATED WORD
			OCCUPIES IN THE SUBFRAME.
BIT MASK	64	D-x\SFS4-	BINARY STRING OF 1s and 0s
•		y-n	TO IDENTIFY THE BIT
			LOCATIONS IN A WORD
	ļ		POSITION THAT ARE
			ASSIGNED TO THIS SUPER-
	·		COMMUTATED CHANNEL. IF
			THE FULL WORD IS USED FOR
			THIS MEASUREMENT, ENTER -
			'FW'. LEFT MOST BIT
		,	CORRESPONDS TO FIRST BIT
•			TRANSMITTED.
INTERVAL	3	D-x\SFS5-	SPECIFY THE INTERVAL THAT
		y-n	IS THE OFFSET FROM THE
			FIRST WORD LOCATION AND
			EACH SUBSEQUENT
			LOCATION.
EVERY LOCATION	ON		
SUBFRAME	3	D-x\SFS6-	ENTER THE SUBFRAME
LOCATION		y-n-e	WORD POSITION OF THE
			MEASUREMENT.



Г	TABLE 9-6 (0	Cont'd). PCN	I MEASUREM	ENT DESCRIPTION GROUP (D)
۲		MAXIMUM		
l	PARAMETER	FIELD	CODE	DEFINITION
	THUMBILL	SIZE	NAME	
ŀ	BIT MASK	64	D-x\SFS7-	BINARY STRING OF 1s and 0s TO
	DII MADIC	0-1	y-n-e	IDENTIFY THE BIT LOCATIONS
			y me	IN A WORD POSITION THAT ARE
ļ				ASSIGNED TO THIS SUPER-
1			•	COMMUTATED MEASUREMENT.
1				IF THE FULL WORD IS USED FOR
			·	THIS MEASUREMENT, ENTER
١				'FW', LEFT MOST BIT
	•			CORRESPONDS TO FIRST BIT
١				TRANSMITTED.
ļ	BENGERED EINE BERKSINEDE	ida Anvir iti ava.	L ATTONI ANTOE	T MASK FOR EACH OF THE WORD
		indiae da in in inches		ED CHANNEL OCCUPIES, (N)
	LOCATIONS THAT	THESCIER		ED CHANNEL OCCUITES, (N)
ļ	SUBFRAME FRA	<u>CMENITED</u>		
\mid	the state of the s	1	D-x\FSF\	NUMBER OF SUBFRAME WORD
	NUMBER OF	1	1	POSITIONS THAT THE
	FRAGMENTS		N-y-n	FRAGMENTED CHANNEL
				OCCUPIES, N.
ŀ	MEASUREMENT	3	D-x\FSF1-	TOTAL LENGTH OF THE
	WORD LENGTH	3		RECONSTRUCTED BINARY DATA
	WORDLENGIN		y-n	WORD.
	NUMBER OF	1	D-x\FSF2\	NUMBER OF SUBFRAMES
	SUBFRAMES	1	N-y-n	CONTAINING THE FRAGMENTS.
ì	SUBFRAME	32	D-x\FSF3-	ENTER THE SUBFRAME NAME.
	NAME		y-n-m	
J	LOCATION	1	D-x\FSF4-	TO SPECIFY:
	DEFINITION		y-n-m	INTERVAL - 'I'
	•			EVERY WORD - 'E'.
	INTERVAL		······································	
	LOCATION IN	3	D-x\FSF5-	SPECIFY THE FIRST WORD
	SUBFRAME		y-n-m	POSITION THAT THE
				FRAGMENTED WORD
				OCCUPIES IN THE SUBFRAME.



TABLE 9-6	TABLE 9-6 (Cont'd). PCM MEASUREMENT DESCRIPTION GROUP (D)						
	MAXIMUM						
PARAMETER	FIELD	CODE	DEFINITION				
•	SIZE	NAME					
BIT MASK	64	D-x\FSF6-	BINARY STRING OF 1s AND 0s				
	-	y-n-m	TO IDENTIFY THE BIT				
		٠.	LOCATIONS IN A WORD POSITION				
			THAT ARE ASSIGNED TO THIS				
·			FRAGMENTED CHANNEL. IF THE				
			FULL WORD IS USED FOR THIS				
			MEASUREMENT, ENTER - 'FW'.				
			LEFT MOST BIT CORRESPONDS TO				
•			FIRST BIT TRANSMITTED.				
INTERVAL	3	D-x\FSF7-	SPECIFY THE INTERVAL THAT IS				
		y-n-m	THE OFFSET FROM THE FIRST				
·			WORD LOCATION AND EACH				
			SUBSEQUENT LOCATION.				
EVERY LOCATI	ON						
SUBFRAME	3	D-x\FSF8-	ENTER THE SUBFRAME WORD				
LOCATION		y-n-m-e	POSITION OF THE MEASUREMENT.				
BIT MASK	64	D-x\FSF9-	BINARY STRING OF 1s and 0s				
•		y-n-m-e	TO IDENTIFY THE BIT LOCATIONS				
			IN A WORD POSITION THAT ARE				
			ASSIGNED TO THIS FRAGMENTED				
			MEASUREMENT. IF THE FULL				
			WORD IS USED FOR THIS				
			MEASUREMENT, ENTER 'FW'. LEFT				
		<u> </u> -	MOST BIT CORRESPONDS TO FIRST				
			BIT TRANSMITTED.				
FRAGMENT	1	D-x\FSF10-	MOST SIGNIFICANT BIT FIRST - 'M'				
TRANSFER		y-n-m-e	LEAST SIGNIFICANT BIT FIRST - 'L'				
ORDER			DEFAULT - 'D'				

TABLE 9-6	(Cont'd). PCM	MEASUREME	NT DESCRIPTION GROUP (D)			
	MAXIMUM					
PARAMETER	FIELD	CODE	DEFINITION			
	SIZE	NAME				
FRAGMENT	1	D-x\FSF11-	A NUMBER FROM 1 TO N			
POSITION		y-n-m-e	SPECIFYING POSITION OF			
			THIS FRAGMENT WITHIN THE			
			RECONSTRUCTED BINARY DATA			
	•		WORD. (1 CORRESPONDS TO			
·			MOST SIGNIFICANT FRAGMENT).			
ENTER HID SUB	FRAME LOCAT	TION AND BIT	MASK FOR EACH OF THE WORD			
POSITIONS THAT	THE FRAGME	ENTED CHAN	NEL OCCUPIES, (N) LOCATIONS.			
REPEAT THE AB	OVE ENTRIES;	AS APPROPR	ATE FOR EACH SUBFRAME THAT			
CONTAINS THE	COMPONENTS	OF THE FRAC	MENTED WORD.			
COMMENTS						
COMMENTS	3200	D-x\COM	PROVIDE ANY ADDITIONAL			
			INFORMATION REQUIRED			
		•	OR DESIRED.			
			OF THE ABOVE INFORMATION			
	UNTIL EACH MEASUREMENT HAS BEEN DEFINED. ANY WORD POSITION NOT					
			CHANNEL OR A "DON'T CARE"			
	CHANNEL. INFORMATION WILL NOT BE PROCESSED FOR THESE "SPARE"					
	CHANNELS. NOTE THAT MEASUREMENT LIST CHANGES AND FORMAT					
CHANGES THAT ARE A PART OF CLASS II SYSTEMS ARE INCLUDED IN THE						
			MENT DEFINITION IS THE DATA			
LINK NAME (FORMAT) AND THE MEASUREMENT LIST.						

9.5.6.3 <u>1553 Bus Data Attributes (B)</u>. Figure 9-8 and table 9-7 describes the 1553 busoriginated data formats. The 1553 Bus Data Attributes Group defines the attributes of a data acquisition system that is compliant with chapter 8. The primary components of this group are the recording description and message content definition. The former defines the method by which the data were recorded on the tape such as track spread versus composite. The latter consists of the message identification information and the measurement description set. The message identification information defines the contents of the control word that identifies each 1553 message. The measurement description set describes the measurement attributes and contains the measurement name which links the measurand to the Data Conversion Attributes Group (C).

Mode codes are described in the message identification information. If the Subterminal Address (STA) field contains 00000 or 11111, the information in the Data Word Count/Mode Code field is a mode code and identifies the function of the mode code. If the mode code has associated data words, they are described in this section of the attributes. If the 1553 message is a remote terminal to remote terminal transfer, both the transmit command and the receive command are used to identify the message.

						CODE NAME	REFERENC PAGE
DATA LINK NAME						(B-x\DLN)	(9-52)
·	TEST	EST ITEM				(B-x\TA)	(9-52)
	NUM	BER OF	BUSE	ES	·	(B-x\NBS\N)	
		BUS N	UMB	ER	·	(B-x\BID-i)	
		BUS N	AME			(B-x\BNA-i)	
		*RECC	RDIN	IG DES	CRIPTION		(9-53)
		1	NUMI	BER OF	TRACKS	(B-x\TK\N-i)	
			ΓRΑC	K SEQ	UENCE	(B-x\TS-i-k)	
		*MESS	AGE	CONTE	ENT DEFINITION		(9-53)
			NUM	BER O	F MESSAGES	(B-x\NMS\N-i)	
•		_		MESS	SAGE NUMBER	(B-x\MID-i-n)	
				MESS	SAGE NAME	(B-x\MNA-i-n)	
	:			REMO	OTE TERMINAL NAME	(B-x\TRN-i-n)	
				REMO	OTE TERMINAL ADDRESS	(B-x\TRA-i-n)	
				SUBT	ERMINAL NAME	(B-x\STN-i-n)	(9-53)
				SUBTERMINAL ADDRESS		(B-x\STA-i-n)	
				TRAN	NSMIT/RECEIVE MODE	(B-x\TRM-i-n)	
				DATA	A WORD COUNT/MODE COUNT	(B-x\DWC-i-n)	
				SPEC	IAL PROCESSING	(B-x\SPR-i-n)	
				*RT/F	RT RECEIVE COMMAND LIST		(9-54)
					REMOTE TERMINAL NAME	(B-x\RTRN-i-n-m)	
	.				REMOTE TERMINAL ADDRESS	(B-x\RTRA-i-n-m)	(9-54)
,					SUBTERMINAL NAME	(B-x\RSTN-i-n-m)	
	1			ŀ	SUBTERMINAL ADDRESS	(B-x\RSTA-i-n-m)	
		•			DATA WORD COUNT	(B-x\RDWC-i-n-m)	
				*MOI	DE CODE		(9-55)
					MODE CODE DESCRIPTION	(B-x\MCD-i-n)	
					MODE CODE DATA WORD DESCRIPTION	(B-x\MCW-i-n)	
				*MEA	ASUREMENT DESCRIPTION SET		(9-55)
					NUMBER OF MEASURANDS	$(B-x\MN\N-i-n)$	
					MEASUREMENT NAME	(B-x\MN-i-n-p)	•
					PARITY	(B-x\MN1-i-n-p)	(9-55)
					PARITY TRANSFER ORDER	(B-x\MN2-i-n-p)	

Figure 9-8. 1553 Bus Data Attributes Group (B).

	*MEASUREMENT LOCATION		(9-55)
	NUMBER OF MEASUREMENT LOCATIONS	(B-x\NML\N-i-n-p)	
	MESSAGE WORD NUMBER	(B-x\MWN-i-n-p-e)	
	BIT MASK	(B-x\MBM-i-n-p-e)	
	TRANSFER ORDER	(B-x\MTO-i-n-p-e)	
	FRAGMENT POSITION	(B-x\MFP-i-n-p-e)	(9-56)
*COMMENTS			
COMMENTS		(B-x\COM)	(9-56)
*HEADING ONLY - ?	NO DATA ENTRY		

Figure 9-8 (Cont'd). 1553 Bus Data Attributes Group (B).

TABL	E 9-7 1553 BU	S DATA ATTI	RIBUTES GROUP (B)
PARAMETER	MAXIMUM FIELD SIZE	CODE NAME	DEFINITION
DATA LINK NAME	32	B-x\DLN	IDENTIFY THE DATA LINK CONSISTENT WITH THE MULTIPLEX/MODULATION GROUP. THE PCM FORMAT OF THE DATA STREAM SHALL BE DEFINED IN THE PCM FORMAT ATTRIBUTES GROUP.
TEST ITEM	16	B-x\TA	TEST ITEM DESCRIPTION IN TERMS OF NAME, MODEL, PLATFORM, OR IDENTIFICA- TION CODE THAT CONTAINS THE DATA ACQUISITION SYSTEM.
NUMBER OF BUSES	1	B-x\NBS\N	SPECIFY THE NUMBER OF BUSES INCLUDED WITHIN THIS DATA LINK.
BUS NUMBER	3	B-x\BID-i	ENTER THE BUS NUMBER AS A BINARY STRING.
BUS NAME	32	B-x\BNA-i	SPECIFY THE BUS NAME

TABLE 9	-7 (Cont'd). 1	553 BUS DATA	ATTRIBUTES GROUP (B)
	MAXIMUM	-	
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	·
RECORDING DES	CRIPTION		The second secon
NUMBER OF	2	B-x\TK\N-i	ENTER THE NUMBER OF TAPE
TRACKS			TRACKS USED TO RECORD
			DATA. ANY ENTRY GREATER
•			THAN ONE INDICATES THAT
			THE DATA HAS BEEN SPREAD
•			ACROSS MULTIPLE TRACKS.
TRACK	3	B-x\TS-i-k	IN THE FOLLOWING ENTRIES
SEQUENCE			GIVE THE SEQUENCE ORDER OF
			TAPE TRACKS THAT SHOULD
			BE USED TO RECOVER THE
			DATA STREAM IN THE
			CORRECT ORDER. (THE ORDER
			GIVEN SHOULD CORRESPOND
			TO THE ACTUAL SKEW OF THE
			DATA ON THE TAPE.)
MESSAGE CONT	ENT DEFINI	FION	
NUMBER OF	8	B-x\NMS\N-i	THE NUMBER OF MESSAGES
MESSAGES			TO BE DEFINED.
MESSAGE	8	B-x\MID-i-n	THE MESSAGE NUMBER THAT
NUMBER			CONTAINS THE FOLLOWING
			DATA.
MESSAGE	32	B-x\MNA-i-n	SPECIFY THE MESSAGE NAME.
NAME			
REMOTE	32	B-x\TRN-i-n	ENTER THE NAME OF THE
TERMINAL			REMOTE TERMINAL THAT IS
NAME			SENDING OR RECEIVING
			THIS MESSAGE. FOR RT/RT,
			SPECIFY THE SENDING REMOTE
			TERMINAL NAME.
REMOTE	5	B-x\TRA-i-n	SPECIFY THE FIVE BIT
TERMINAL			REMOTE TERMINAL ADDRESS
ADDRESS			FOR THIS MESSAGE.
SUBTERMINAL	32	B-x\STN-i-n	ENTER THE NAME OF THE
NAME			SUBTERMINAL THAT IS
			SENDING OR RECEIVING
			THIS MESSAGE.

TABLE 9-7 (Cont'd), 1553 BUS DATA ATTRIBUTES GROUP (B)				
•	MAXIMUM			
PARAMETER	FIELD	CODE	DEFINITION	
	SIZE	NAME		
SUBTERMINAL	5	B-x\STA-i-n	SPECIFY THE FIVE BIT	
ADDRESS		,	SUBTERMINAL ADDRESS FOR	
·			THIS MESSAGE.	
TRANSMIT/	1	B-x\TRM-i-n	INDICATE IF THIS COMMAND	
RECEIVE			WORD IS A TRANSMIT OR	
MODE			RECEIVE COMMAND. FOR	
		•	RT/RT, SPECIFY TRANSMIT.	
•			TRANSMIT - '1'	
			RECEIVE - '0'	
DATA WORD	5	B-x\DWC-i-n	ENTER THE NUMBER OF DATA	
COUNT/MODE			WORDS AS A BINARY STRING,	
CODE			USING X TO INDICATE A	
			"DON'T CARE" VALUE. IF THE	
			SUBTERMINAL ADDRESS	
			INDICATES A MODE CODE,	
·			ENTER THE MODE CODE	
	,		VALUE AS A BINARY STRING.	
SPECIAL	200	B-x\SPR-i-n	PROVIDE ANY SPECIAL	
PROCESSING			PROCESSING REQUIREMENTS	
			PERTAINING TO THIS	
			MESSAGE.	
RT/RT RECEIVE	COMMAND	LIST		
REMOTE	32	B-x\RTRN-	ENTER THE NAME OF THE	
TERMINAL		i-n-m	REMOTE TERMINAL THAT IS	
NAME			RECEIVING THIS RT/RT	
			MESSAGE.	
REMOTE	.5	B-x\RTRA-	SPECIFY THE FIVE BIT	
TERMINAL		i-n-m	REMOTE TERMINAL ADDRESS	
ADDRESS			FOR THIS RT/RT MESSAGE.	
SUBTERMINAL	32	B-x\RSTN-	ENTER THE NAME OF THE SUB-	
NAME	•	i-n-m	TERMINAL THAT IS RECEIVING	
			THIS RT/RT MESSAGE.	
SUBTERMINAL	5	B-x\RSTA-	SPECIFY THE FIVE BIT	
ADDRESS		i-n-m	SUBTERMINAL ADDRESS FOR	
			THIS RT/RT MESSAGE.	

TABLE 9	-7 (Cont'd), 1:	553 BUS DATA .	ATTRIBUTES GROUP (B)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
·	SIZE	NAME	
DATA WORD	5	B-x\RDWC-	ENTER THE NUMBER OF
COUNT		i-n-m	DATA WORDS AS A BINARY
			STRING, USING X TO INDICATE
			A "DON'T CARE" VALUE.
			EXCLUDE STATUS AND TIME
			WORDS. (AN RT/RT MESSAGE
			CANNOT CONTAIN A MODE
•			CODE.)
MODE CODE			
MODE CODE	200	B-x\MCD-i-n	DESCRIBE THE FUNCTION OR
DESCRIPTION			ACTION ASSOCIATED WITH
			THIS MODE CODE.
MODE CODE	200	B-x\MCW-i-n	IF THE MODE CODE HAS AN
DATA WORD			ASSOCIATED DATA WORD
DESCRIPTION			FOLLOWING THE MODE CODE
			COMMAND, PROVIDE A
	,		COMPLETE DESCRIPTION
			OF THE DATA WORD.
MEASUREMENT	DESCRIPTION		
NUMBER OF	4	B-x\MN\	SPECIFY THE NUMBER OF
MEASURANDS	,	N-i-n	MEASURANDS.
MEASUREMENT	32	B-x\MN-	MEASURAND NAME.
NAME		i-n-p	
PARITY	2	B-x\MN1-	NORMAL WORD PARITY.
		i-n-p	EVEN - 'EV'
e/			ODD - 'OD'
•			NONE - 'NO'.
PARITY	1	B-x\MN2-	PARITY BIT LOCATION
TRANSFER		i-n-p	LEADS WORD - 'L'
ORDER			TRAILS WORD - 'T'.
MEASUREMENT		T = 15 = 2	
NUMBER OF	2	B-x\NML\	IF THIS MEASUREMENT IS
MEASUREMENT		N-i-n-p	CONTAINED IN ONE WORD,
LOCATIONS			ENTER '1'. IF THIS
•			MEASUREMENT IS FRAG-
			MENTED, ENTER THE NUMBER
			OF FRAGMENTS.

TABLE 9	-7 (Cont'd). 15	53 BUS DATA 2	ATTRIBUTES GROUP (B)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
,	SIZE	NAME	
MESSAGE	3	B-x\MWN-	ENTER THE NUMBER
WORD NUMBER		i-n-p-e	CORRESPONDING TO THE
	·		DATA WORD COUNT WITHIN A
		·	MESSAGE THAT CONTAINS
· !			THE MEASUREMENT OR THE
			FRAGMENTED MEASURAND.
BIT MASK	64	B-x\MBM-	BINARY STRING OF 1s AND 0s
		i-n-p-e	TO IDENTIFY THE BIT
			LOCATIONS THAT ARE
· .			ASSIGNED TO THIS MEASURE-
e.		·	MENT IN THE WORD
		ĺ	IDENTIFIED ABOVE. IF THE
			FULL WORD IS USED FOR THIS
	·		MEASUREMENT, ENTER 'FW'.
			LEFT MOST BIT CORRESPONDS
			TO FIRST BIT TRANSMITTED.
TRANSFER	3	B-x\MTO-	SPECIFY IF THE START BIT IS
ORDER		i-n-p-e	MOST SIGNIFICANT - 'MSB'
· •			LEAST SIGNIFICANT - 'LSB'
FRAGMENT	1	B-x\MFP-	A NUMBER FROM 1 TO N
POSITION		i-n-p-e	THAT SPECIFIES THE POSITION
			OF THE FRAGMENT WITHIN
		ľ	THE RECONSTRUCTED BINARY
			DATA WORD.
			(1 CORRESPONDS TO THE
			MOST SIGNIFICANT
			FRAGMENT)
			AGMENT OF A FRAGMENTED
			HETHER TO TRANSPOSE THE
	TI SEQUENCE	OR NOT (ESD	INDICATES TO TRANSPOSE THE
BIT SEQUENCE). COMMENTS			
COMMENTS	3200	B-x\COM	PROVIDE ANY ADDITIONAL
COMMENTS	3200	D-X/COM	INFORMATION REQUIRED OR
			DESIRED.
	1		DEGINED.

9.5.7 <u>PAM Attributes (A)</u>. This group provides the information necessary to define the channelization and measurand definition for a PAM waveform. As with the PCM signal, the tie to the calibration data is with the measurement name. Figure 9-9 summarizes the types of inputs required. Table 9-8 specifies the details required. The information that defines the measurand for each channel is required for the channels of interest.

		CODE NAME	REFERENCI PAGE
DATA LINK NAME •		(A-x\DLN)	. (9-58)
	INPUT CODE	(A-x\A1)	(9-58)
	POLARITY	(A-x\A2)	•
	SYNC PATTERN TYPE	(A-x\A3)	
	SYNC PATTERN (OTHER)	(A-x\A4)	
	CHANNEL RATE	(A-x\A5)	•
	CHANNELS PER FRAME	$(A-x\backslash A\backslash N)$	•
•	NUMBER OF MEASURANDS	$(A-x\A\MN\N)$	
	*REFERENCE CHANNELS		(9-58)
	0% SCALE CHANNEL NUMBER	(A-x\RC1)	
	50% SCALE CHANNEL NUMBER	(A-x\RC2)	
	FULL SCALE CHANNEL NUMBER	(A-x\RC3)	•
	*SUBFRAME DEFINITION		(9-59)
	NUMBER OF SUBFRAMES	(A-x\SF\N)	
	SUBFRAME n LOCATION	$(A-x\SF1-n)$	
	SUBFRAME n SYNCHRONIZATION	(A-x\SF2-n)	
	SUBFRAME n SYNCHRONIZATION PATTERN	(A-x\SF3-n)	
	*CHANNEL ASSIGNMENT		(9-59)
_	MEASUREMENT NAME	(A-x\MN1-n)	
-	SUBCOM	(A-x\MN2-n)	
	SUPERCOM	(A-x\MN3-n)	
	*LOCATION		(9-60)
	CHANNEL NUMBER	(A-x\LCW-n-s)	•
	SUBFRAME CHANNEL NUMBER	(A-x\LCN-n-s-r)	
	*COMMENTS		
	COMMENTS	(A-x\COM)	(9-60)
	*HEADING ONLY - NO DATA ENTRY		

Figure 9-9. PAM Attributes Group (A).

	TABLE 9-8.	PAM ATTRIBU	TES GROUP (A)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME .	
DATA LINK	32	A-x\DLN	IDENTIFY THE DATA LINK
NAME		4 m %	NAME.
INPUT CODE	2	A-x\A1	DEFINE THE INPUT CODE:
			50% DUTY CYCLE - 'RZ'
			100% DUTY CYCLE (NRZ) - 'NR'
POLARITY	1	A-x\A2	NORMAL - 'N' INVERTED - 'I'
SYNC PATTERN	3	A-x\A3	SPECIFY THE SYNCHRO-
TYPE			NIZATION PATTERN
			IRIG 106 - 'STD'
]		OTHER - 'OTH'.
SYNC PATTERN	5	A-x\A4	DEFINE THE OTHER
(OTHER)			(NONSTANDARD) SYNCHRONI-
(OTTILIC)			ZATION PATTERN IN TERMS OF
			0 – ZERO SCALE
·	·		H-HALF SCALE
			F – FULL SCALE
			X – DON'T CARE.
CHANNEL RATE	6	A-x\A5	SPECIFY THE CHANNEL RATE IN
CIPHULEDICIE			CHANNELS PER SECOND.
CHANNELS PER	3	A-x\A\N	SPECIFY THE NUMBER OF
FRAME	1		CHANNELS PER FRAME
			INCLUDING THE SYNC PATTERN
			AND CALIBRATION CHANNELS.
			MAXIMUM ALLOWED IS 128.
NUMBER OF	4	A-x\A\MN\N	INDICATE THE NUMBER OF
MEASURANDS			MEASURANDS ASSOCIATED
			WITH THIS DATA LINK (SOURCE).
REDERENCE CH	ANNELS		
0% SCALE	3	A-x\RC1	CHANNEL NUMBER OF 0% SCALE
CHANNEL			REFERENCE. IF NOT USED,
NUMBER			ENTER 'NON' (NONE).
50% SCALE	3	A-x\RC2	CHANNEL NUMBER OF 50%
CHANNEL			SCALE REFERENCE. IF NOT
NUMBER			USED, ENTER 'NON' (NONE).

TABL	E 9-8 (Cont'd'). PAM ATTR	IBUTES GROUP (A)
And the first transfer to the first of the second of the s	MAXIMUM	Number Print, I.C. 1014, 21 of J. o. Stationer, a Negligible 3	recommence gas security (programs or composition or the security of the securi
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
FULL SCALE	3	A-x\RC3	CHANNEL NUMBER OF FULL
CHANNEL NUMBER			SCALE REFERENCE. IF NOT
			USED, ENTER 'NON' (NONE).
SUBFRAME DEFINIT	ION		
NUMBER OF	1	A-x\SF\N	SPECIFY THE NUMBER OF
SUBFRAMES			SUBMULTIPLEXED CHANNELS IN
•			THE FRAME.
SUBFRAME n	3	A-x\SF1-n	CHANNEL NUMBER OF THE
LOCATION		•	SUBFRAME (REPEAT THIS ENTRY
			AND THE FOLLOWING TWO
			ENTRIES FOR EACH SUBFRAME
•			AS A SET).
SUBFRAME n	3	A-x\SF2-n	SPECIFY THE SYNCHRONIZATION
SYNCHRONIZATION			PATTERN FOR THE SUBFRAME:
			IRIG 106 - 'STD'
			OTHER - 'OTH'.
SUBFRAME n	5	A-x\SF3-n	DEFINE THE OTHER
SYNCHRONIZATION			(NONSTANDARD)
PATTERN			SYNCHRONIZATION PATTERN
			IN TERMS OF:
			0 - ZERO SCALE
			H – HALF SCALE
			F - FULL SCALE
٠.			X – DON'T CARE
		ļ	OTH – OTHER
CHANNEL ASSIGNM	ENT		
MEASUREMENT	32	A-x\MN1-n	GIVE THE MEASUREMENT .
NAME			NAME.
SUBCOM	1	A-x\MN2-n	IS THIS A SUBCOMMUTATED
			CHANNEL? 'Y' OR 'N'.
SUPERCOM	1	A-x\MN3-n	IS THIS A SUPERCOMMUTATED
			CHANNEL? IF YES, ENTER THE
			NUMBER OF POSITIONS IT
			OCCUPIES – n. IF NO, ENTER - 'N'.
			A SUPERCOMMUTATED
			SUBCOMMUTATED PARAMETER
			IS ALLOWABLE AND WILL HAVE
			ENTRIES IN THIS AND THE
1			PREVIOUS RECORD.

TABLE 9-8 (Cont'd). PAM ATTRIBUTES GROUP (A)					
	MAXIMUM				
PARAMETER	FIELD	CODE	DEFINITION		
	SIZE	NAME			
LOCATION					
CHANNEL	3	A-x\LCW-n-s	NUMBER OF THE CHANNEL		
NUMBER	·		THAT CONTAINS THIS		
	•	ļ	MEASURAND. IF THIS IS A		
			SUBCOMMUTATED CHANNEL,		
		ļ	ENTER THE CHANNEL THAT		
			CONTAINS THE SUBCOM-		
			MUTATED CHANNEL.		
SUBFRAME	3	A-x\LCN-n-s-r	CHANNEL NUMBER IN THE		
CHANNEL			SUBFRAME, IF APPROPRIATE.		
NUMBER			·		
COMMENTS					
COMMENTS	3200	A-x\COM	PROVIDE ANY ADDITIONAL		
,			INFORMATION REQUIRED OR		
·			DESIRED.		

9.5.8 <u>Data Conversion Attributes (C)</u>. The Data Conversion Attributes Group includes a definition of the method by which the raw telemetry data is to be converted to meaningful information. The sensor calibration is contained in the group for each type of sensor that uses a standard calibration curve or for each sensor or parameter that has a unique calibration requirement. The calibration information can be entered in several different formats. Provision is made to permit a test organization to convert data set entries to coefficients of an appropriate curve fit and record the derived coefficients. Figure 9-10 shows the structure of the data conversion attributes. Table 9-9 contains the detailed information required.



For reference purposes, the following telemetry unit definitions apply: PCM - natural binary range as indicated by binary format entry PAM - 0 to full scale (100)

FM (Analog) - lower band edge (-100) to upper band edge (+100).

**TRANSDUCER INFORMATION TYPE MODEL NUMBER SERIAL NUMBER SECURITY CLASSIFICATION ORIGINATION DATE REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\DCN) (C-d\TRD1) (C-d\TRD2)	(9-63) (9-63)
*TRANSDUCER INFORMATION TYPE MODEL NUMBER SERIAL NUMBER SECURITY CLASSIFICATION ORIGINATION DATE REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	,	(9-63)
TYPE MODEL NUMBER SERIAL NUMBER SECURITY CLASSIFICATION ORIGINATION DATE REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	,	` ,
MODEL NUMBER SERIAL NUMBER SECURITY CLASSIFICATION ORIGINATION DATE REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	,	
SERIAL NUMBER SECURITY CLASSIFICATION ORIGINATION DATE REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS		
SECURITY CLASSIFICATION ORIGINATION DATE REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\TRD3)	
ORIGINATION DATE REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\TRD4)	
REVISION NUMBER ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\TRD5)	
ORIENTATION *POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\TRD6)	
*POINT OF CONTACT NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\TRD7)	
NAME AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(0 0.1107)	(9-64)
AGENCY ADDRESS TELEPHONE *MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\POC1)	(5 01)
*MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\POC2)	
*MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\POC3)	
*MEASURAND DESCRIPTION MEASUREMENT ALIAS	(C-d\POC4)	
DESCRIPTION MEASUREMENT ALIAS	(C-01/0C4)	(0.64)
MEASUREMENT ALIAS	(C AMANI)	(9-64)
	(C-d\MN1)	
	(C-d\MNA)	
EXCITATION VOLTAGE	(C-d\MN2)	
ENGINEERING UNITS	(C-d\MN3)	
LINK TYPE	(C-d\MN4)	(0.64)
*TELEMETRY VALUE DEFINITION		(9-64)
BINARY FORMAT	(C 4\EDE)	
FLOATING POINT FORMAT	(C-d\FPF)	(0.65)
*INFLIGHT CALIBRATION	(0.4)**(0)**D	(9-65)
NUMBER OF POINTS	(C-d\MC\N)	
STIMULUS	(C-d\MC1-n)	
TELEMETRY VALUE	(C-d\MC2-n)	
DATA VALUE	(C-d\MC3-n)	(0.65)
*AMBIENT VALUE	(C. Alana)	(9-65)
NUMBER OF AMBIENT CONDITIONS	(C-d\MA\N)	
STIMULUS	(C-d\MA1-n) (C-d\MA2-n)	•
TELEMETRY VALUE	(C-d\MA3-n)	
DATA VALUE	(C-dwiA3-n)	(0.66)
*OTHER INFORMATION	(C AMOT1)	(9-66)
HIGH MEASUREMENT VALUE	(C-d\MOT1)	
LOW MEASUREMENT VALUE	(C-d\MOT2)	
HIGH ALERT LIMIT VALUE	(C-d\MOT3)	
LOW ALERT LIMIT VALUE	(C-d\MOT4)	
HIGH WARNING LIMIT VALUE		
LOW WARNING LIMIT VALUE SAMPLE RATE	(C-d\MOT5) (C-d\MOT6)	



Figure 9-10. Data Conversion Attributes Group (C).

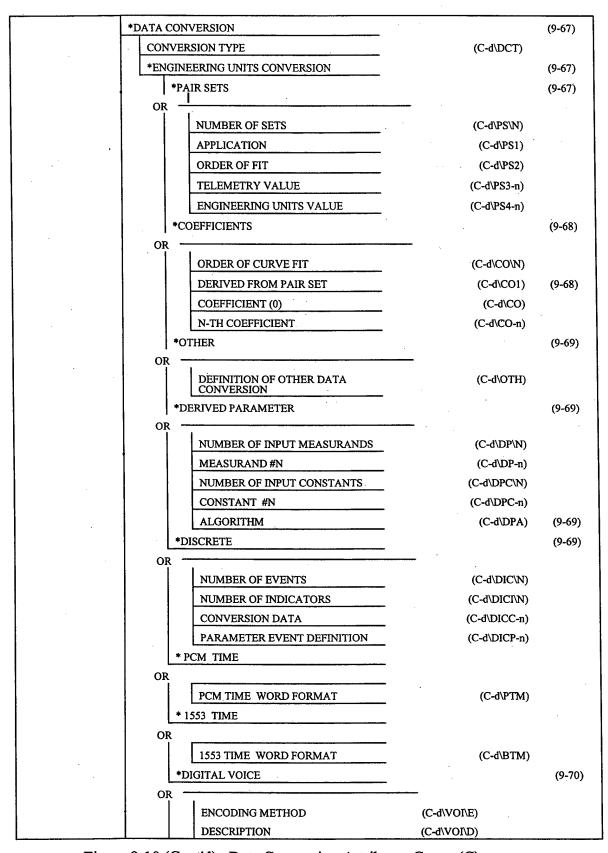


Figure 9-10 (Cont'd). Data Conversion Attributes Group (C).

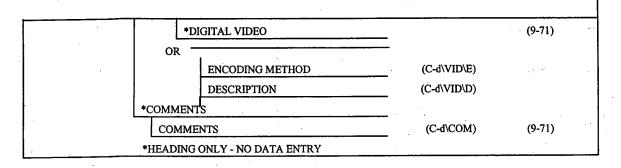


Figure 9-10 (Cont'd). Data Conversion Attributes Group (C).

TABLE	E 9-9. DATA C	ONVERSION	ATTRIBUTES GROUP (C)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
•	SIZE	NAME	
MEASUREMENT	32	C-d\DCN	GIVE THE MEASUREMENT NAME.
NAME		:	
TRANSDUCER INFO	RMATION		
TYPE	32	C-d\TRD1	TYPE OF SENSOR, IF APPROPRIATE.
MODEL NUMBER	- 32	C-d\TRD2	IF APPROPRIATE.
SERIAL NUMBER	32	C-d\TRD3	IF APPLICABLE.
SECURITY	2 .	C-d\TRD4	ENTER THE SECURITY
CLASSIFICATION			CLASSIFICATION OF THIS
			MEASURAND.
			UNCLASSIFIED - 'U'
* .			CONFIDENTIAL - 'C'
	e e e e e e e e e e e e e e e e e e e		SECRET - 'S'
	• .	•	TOP SECRET - 'T'
·			OTHER - 'O'.
	·		APPEND THE FOLLOWING:
	. *		IF RECEIVED TELEMETRY
• •			SIGNAL (COUNTS) IS
			CLASSIFIED, ADD 'R'.
•			IF EXPRESSED IN
			ENGINEERING UNITS, THE
			MEASURAND VALUE IS
		'	CLASSIFIED, ADD 'E'.
			IF BOTH ARE CLASSIFIED, ADD 'B'.
ORIGINATION	10	C-d\TRD5	DATE OF ORIGINATION OF THIS
DATE			DATA FILE.
			DD – DAY MM – MONTH
			YYYY – YEAR (MM-DD-YYYY)

TABLE	9-9 (Cont'd).	DATA CON	IVERSION ATTRIBUTES GROUP (C)
	MAXIMUM	CODE	
PARAMETER	FIELD SIZE	NAME	DEFINITION
REVISION	4	C-d\TRD6	SPECIFY THE REVISION NUMBER OF THE
NUMBER		. *	DATA PROVIDED.
ORIENTATION	32	C-d\TRD7	DESCRIBE THE PHYSICAL
•			ORIENTATION OF THE SENSOR.
POINT OF			POINT OF CONTACT WITH THE
CONTACT:			ORGANIZATION THAT PROVIDED THE
NAME	24	C-d\POC1	CALIBRATION DATA.
AGENCY	48	C-d\POC2	
ADDRESS	48	C-d\POC3	
TELEPHONE	20	C-d\POC4	
MEASURAND			
DESCRIPTION	64	C-d\MN1	DESCRIBE THE PARAMETER BEING
			MEASURED.
MEASUREMENT	32	C-d\MNA	ALTERNATE MEASURAND NAME.
ALIAS			
EXCITATION	10	C-d\MN2	SENSOR REFERENCE VOLTAGE IN
VOLTAGE		·	VOLTS.
ENGINEERING	16	C-d\MN3	DEFINE THE ENGINEERING UNITS
UNITS			APPLICABLE TO THE OUTPUT DATA.
LINK TYPE	3	C-d\MN4	DEFINE THE SOURCE DATA LINK TYPE:
			FM (ANALOG) - 'ANA' PCM - 'PCM'
			PAM - 'PAM' OTHER - 'OTH'.
TELEMETRY VAI	UE DEFINIT	ION	
BINARY	3	C-d\BFM	FORMAT OF THE BINARY INFORMATION:
FORMAT			INTEGER - 'INT'
			UNSIGNED INTEGER BINARY - 'UNS'
			SIGN AND MAGNITUDE BINARY (+=0) - 'SIG'
		,	SIGN AND MAGNITUDE BINARY (+=1) - 'SIM'
			ONE'S COMPLEMENT - 'ONE'
			TWO'S COMPLEMENT - 'TWO' OFFSET BINARY - 'OFF'
			FLOATING POINT - 'FPT'
<i>i</i>			BINARY CODED DECIMAL - 'BCD'
			OTHER - 'OTH', DEFINE IN COMMENTS.
FLOATING	. 8	C-d\FPF	IF BINARY FORMAT IS 'FPT', SPECIFY
POINT FORMAT	j	- Cull	WHICH FLOATING POINT FORMAT WILL
	·		BE USED.
	*		THE COUNTY.







TARLEGIO	(Cont'd) DATA	CONVERSIO	N ATTRIBUTES GROUP (C)
1ADEL 72	MAXIMUM	l CONTINUE	
PARAMETER	FIELD	CODE	DEFINITION
PARAMETER	SIZE	NAME	DEI INTION
TATEL TOTAL CALLD		NAME	
INFLIGHT CALIB	KATION	C 4/MC/NI	IS INFLIGHT CALIBRATION
NUMBER OF	1	C-d\MC\N	REQUIRED? 'N' FOR NO OR A
POINTS			NUMBER BETWEEN 1 AND 5,
* * * * * * * * * * * * * * * * * * *			IF IT IS REQUIRED.
			A MAXIMUM OF FIVE
			CALIBRATION POINTS MAY
			BE INCLUDED.
		G 10101	PROVIDE THE STIMULUS
STIMULUS	32	C-d\MC1-n	;
			FOR THIS CALIBRATION
	16	G 1/1 (G)	POINT. TELEMETRY UNITS VALUE.
TELEMETRY.	16	C-d\MC2-n	TELEMETRY UNITS VALUE.
VALUE		G 13 (G)	ENGINEERING UNITS VALUE.
DATA VALUE	32	C-d\MC3-n	SCIENTIFIC NOTATION MAY
		•	1
			BE USED.
		KIES MUST BE	REPEATED FOR EACH
INFLIGHT CALIBR			
AMBIENT VALUE			TARREST OF CTATIOOD
NUMBER OF	1	C-d\MA\N	NUMBER OF STATIC OR
AMBIENT			SIMULATED CONDITIONS.
CONDITIONS		0.13.64.1	DESCRIPTION OF THE
TIMULUS	32	C-d\MA1-n	DESCRIPTION OF THE
•			STATIC ENVIRONMENT IN
		·	WHICH A NONTEST
			STIMULUS OR SIMULATOR IS
		0.113.51.6	THE DATA SOURCE.
TELEMETRY	16	C-d\MA2-n	TELEMETRY UNITS VALUE
VALUE			FOR THE STATIC STIMULUS.
DATA VALUE	32	C-d\MA3-n	ENGINEERING UNITS VALUE
			FOR THE STATIC OR
			SIMULATED CONDITION.
			SCIENTIFIC NOTATION MAY
		l	BE USED.

TABLE 9-9 (C	ont'd). DATA	CONVERSIO	N ATTRIBUTES GROUP (C)
PARAMETER	MAXIMUM FIELD SIZE	CODE NAME	DEFINITION
OTHER INFORMATION)N		
HIGH MEASUREMENT VALUE	32	C-d\MOT1	HIGHEST ENGINEERING UNIT VALUE DEFINED BY THE CALIBRATION DATA. SCIENTIFIC NOTATION MAY BE USED.
LOW MEASUREMENT VALUE	32	C-d\MOT2	LOWEST ENGINEERING UNIT VALUE DEFINED IN THE CALIBRATION DATA. SCIENTIFIC NOTATION MAY BE USED.
HIGH ALERT LIMIT VALUE	32	C-d\MOT3	HIGHEST ENGINEERING UNIT VALUE EXPECTED OR SAFE OPERATING VALUE OF THE PARAMETER. ("RED") SCIENTIFIC NOTATION MAY BE USED.
LOW ALERT LIMIT VALUE	32	C-d\MOT4	LOWEST ENGINEERING UNIT VALUE EXPECTED OR THE SAFE OPERATING VALUE OF THE PARAMETER. ("RED") SCIENTIFIC NOTATION MAY BE USED.
HIGH WARNING LIMIT VALUE	32	C-d\MOT5	HIGHEST ENGINEERING UNIT VALUE EXPECTED OR SAFE OPERATING VALUE OF THE PARAMETER. ("YELLOW") SCIENTIFIC NOTATION MAY BE USED.
LOW WARNING LIMIT VALUE	32	C-d\MOT6	LOWEST ENGINEERING UNIT VALUE EXPECTED OR THE SAFE OPERATING VALUE OF THE PARAMETER. ("YELLOW") SCIENTIFIC NOTATION MAY BE USED.
SAMPLE RATE	6	C-d\SR	ENTER THE SAMPLE RATE IN TERMS OF SAMPLES/ SECOND.

TYPE OF THE DATA CONVERSION: NONE - 'NON' ENGINEERING UNITS: PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	TABLE 9-9 (Cont'd). DATA CONVERSION ATTRIBUTES GROUP (C)					
DATA CONVERSION CONVERSION TYPE 3 C-d\DCT DEFINE THE CHARACTERISTICS OF THE DATA CONVERSION: NONE - 'NON' ENGINEERING UNITS: PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	PARAMETER		CODE	DEFINITION		
CONVERSION TYPE 3 C-d\DCT DEFINE THE CHARACTERISTICS OF THE DATA CONVERSION: NONE - 'NON' ENGINEERING UNITS: PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	TARGUADIER		1	DEI INTION		
OF THE DATA CONVERSION: NONE - 'NON' ENGINEERING UNITS: PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	DATA CONVERSION					
THE DATA CONVERSION: NONE - 'NON' ENGINEERING UNITS: PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	CONVERSION	3	C-d\DCT	DEFINE THE CHARACTERISTICS		
NONE - 'NON' ENGINEERING UNITS: PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS 2 C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	TYPE					
ENGINEERING UNITS: PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	•					
PAIR SETS - 'PRS' COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	·					
COEFFICIENTS - 'COE' DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.						
DERIVED - 'DER' DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.						
DISCRETE - 'DIS' PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.						
PCM TIME - 'PTM' 1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	,	·		1		
1553 TIME - 'BTM' DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.			·			
DIGITAL VOICE - 'VOI' DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.			-			
DIGITAL VIDEO - 'VID' SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.		·		,		
SPECIAL PROCESSING - 'SP' (ENTER IN COMMENTS). OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	•					
OTHER - 'OTH' ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.				1		
ENGINEERING UNITS CONVERSION PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.				'SP' (ENTER IN COMMENTS).		
PAIR SETS NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.	·			OTHER - 'OTH'		
NUMBER OF SETS C-d\PS\N SPECIFY THE NUMBER OF PAIR SETS PROVIDED, n.						
SETS PROVIDED, n.	in the first of the second					
	NUMBER OF SETS	_	C-d\PS\N			
		2				
1 1 1	APPLICATION	_	C-d\PS1	ARE THE PAIR SETS TO BE USED		
1 TO DEFINE A POLYNOMINAL		1				
CURVE FIT? 'Y' (YES) OR 'N'	` 	,				
(NO). IF THE ANSWER IS NO, THEN THE PAIR SETS ARE TO						
				BE USED AS A "TABLE LOOKUP"		
				WITH LINEAR INTERPOLATION		
BETWEEN THE DEFINED	•			1		
POINTS.						

TABLE 9-9 (C	ont'd). DATA (CONVERSIO	NATTRIBUTES GROUP (C)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
ORDER OF FIT	2	C-d\PS2	SPECIFY THE ORDER OF THE
			CURVE FIT TO BE
			PERFORMED, m. AT LEAST 2
			PAIR SETS MUST BE
			PROVIDED, AND A MAXIMUM
•			OF 32 PAIR SETS MAY BE
			INCLUDED. TWELVE OR
			MORE PAIR SETS ARE
			RECOMMENDED FOR A FIFTH
,			ORDER FIT.
TELEMETRY	16	C-d\PS3-n	TELEMETRY UNITS VALUE.
VALUE	,		
ENGINEERING	32	C-d\PS4-n	ENGINEERING UNITS VALUE.
UNITS VALUE			SCIENTIFIC NOTATION MAY
			BE USED.
REPEAT THE ABOVE	JFOR (JJAIB n.D.	ATA SETS.	
COEFFICIENTS			
ORDER OF	2	C-d/CO/N	SPECIFY THE ORDER OF THE
CURVE FIT			POLYNOMINAL CURVE FIT, n.
DERIVED FROM	1	C-d\CO1	WERE THE COEFFICIENTS
PAIR SET			DERIVED FROM THE PAIR SET
	•		CALIBRATION DATA
			PROVIDED ('Y' OR 'N')? IF
•			YES, PROVIDE A POINT OF
	•		CONTACT IN THE COMMENTS
COEFFICIENT	32	C-d\CO	RECORD. VALUE OF THE ZERO ORDER
(0)	<i>52</i>	C-aico	TERM (OFFSET). SCIENTIFIC
(0)		-	NOTATION MAY BE USED.
N-TH	32	C-d\CO-n	VALUE OF THE COEFFICIENT
COEFFICIENT	52	0-u/00-11	OF THE N-TH POWER OF X
			(FIRST ORDER COEFFICIENT IS
·			THE EQUIVALENT OF BIT
			WEIGHT). SCIENTIFIC
			NOTATION MAY BE USED.
REPEATIUNITIL ALLIN		ENTS ARE D	

TABLÉ 9-9 (Co	nt'd). DATA (CONVERSION	ATTRIBUTES GROUP (C)								
MAXIMUM											
PARAMETER	FIELD	CODE	DEFINITION								
•	SIZE	NAME									
OTHER											
DEFINITION OF	1000	C-d\OTH	DEFINE OTHER DATA								
OTHER DATA			CONVERSION TECHNIQUE OR								
CONVERSION			SPECIAL PROCESSING								
			REQUIREMENT.								
DERIVED PARAMET	ER										
NUMBER OF INPUT	2.	C-d\DP\N	SPECIFY THE NUMBER OF								
MEASURANDS			INPUT MEASURANDS USED TO								
			DERIVE THIS PARAMETER.								
MEASURAND #N	- 32	C-d\DP-n	SPECIFY THE NAME OF THE								
			N-TH INPUT MEASURAND.								
CONTINUE UNTIL AL	L n MEASUR	ANDS ARE D	EFINED.								
NUMBER OF INPUT	2	C-d\DPC	SPECIFY THE NUMBER OF								
CONSTANTS		M	INPUT CONSTANTS USED TO								
			DERIVE THIS PARAMETER								
CONSTANT #N	32	C-d\DPC-n	SPECIFY THE VALUE FOR THE								
·			N-TH CONSTANT. SCIENTIFIC								
			NOTATION MAY BE USED.								
CONTINUE UNTIL AI	L n CONSTAI	NTS ARE DEF	INED.								
ALGORITHM	240	C-d\DPA	DEFINE THE ALGORITHM TO								
	:		BE USED IN DERIVING THE								
			PARAMETER.								
DISCRETE											
NUMBER OF	2	C-d\DIC\N	HOW MANY EVENTS ARE								
EVENTS			ASSOCIATED WITH THIS								
			DISCRETE FIELD, n?								
NUMBER OF	2	C-d\DICI\	NUMBER OF INDICATORS:								
INDICATORS		N	FOR A PCM SYSTEM, PROVIDE								
			THE NUMBER OF BITS USED								
* ·			FOR THIS DISCRETE SET. FOR								
			A PAM OR ANALOG CHANNEL,								
			PROVIDE THE NUMBER OF								
			LEVELS USED TO DEFINE THIS								
			DISCRETE SET.								

TABLE 9-9	(Cont'd). DATA	CONVERSION	NATTRIBUTES GROUP (C)
	MAXIMUM		
PARAMETER	FIELD	CODE	DEFINITION
	SIZE	NAME	
CONVERSION	16	C-d\DICC-n	TELEMETRY VALUE, COUNTS
DATA			FOR PCM, PERCENT OF FULL
			SCALE FOR PAM OR ANALOG.
PARAMETER	240	C-d\DICP-n	DEFINE THE EVENT FOR THE
EVENT		·	BIT OR BIT FIELD IN A WORD
DEFINITION			THAT CORRESPONDS TO A
•			DISCRETE EVENT OR THE
			PERCENT FULL SCALE VALUE
			SUCH AS SWITCH ON OR OFF.
CONTINUETODE	ing a thaine	VISTOR EACH	BIT PATTERN OR VALUE OF
19HB DISCRETE ME	ASURAND.		
PCM TIME			
PCM TIME WORD	1	C-d\PTM	SPECIFY THE PCM TIME
FORMAT			WORD FORMAT USED, AS
·			DEFINED IN PARAGRAPH 4.7.
			HIGH ORDER TIME - 'H'
			LOW ORDER TIME - 'L'
			MICROSECOND TIME - 'M'
1553 TIME			
1553 TIME WORD	1	C-d\BTM	SPECIFY THE 1553 TIME WORD
FORMAT			FORMAT USED, AS DEFINED
·			IN PARAGRAPHS 4.7 AND 8.5.
			HIGH ORDER TIME - 'H'
			LOW ORDER TIME - 'L'
			MICROSECOND TIME - 'M'
•			RESPONSE TIME - 'R'
DIGITAL VOICE			
ENCODING	4	C-d\VOI\E	SPECIFY THE VOICE
METHOD			ENCODING METHOD USED.
	. 1	et egil a a	CVSD - 'CVSD'
= TO GENT TO Y	<u> </u>		OTHER - 'OTHR'
DESCRIPTION	640	C-d\VOI\D	SPECIFY THE DECODING
			ALGORITHM TO BE USED.

TABLE 9-9 (Co	ont'd). DATA (CONVERSION	N ATTRIBUTES GROUP (C)
PARAMETER	MAXIMUM FIELD	CODE	DEFINITION
DIGITAL VIDEO	SIZE	NAME	
ENCODING METHOD	64	C-d\VID\E	SPECIFY THE VIDEO ENCODING METHOD USED.
DESCRIPTION	640	C-d\VID\D	SPECIFY THE DECODING ALGORITHM TO BE USED.
COMMENTS			
COMMENTS	3200	C-d\COM	PROVIDE ANY OTHER INFORMATION REQUIRED OR DESIRED.

9.5.9 <u>Airborne Hardware Attributes (H)</u>. The Airborne Hardware Attributes Group defines the specific configuration of airborne instrumentation hardware in use on the item under test. This group allows the same TMATS file to describe the airborne hardware as well as the telemetry attributes.

Specific information on the structure and definition of airborne hardware attributes is not included in this standard. There are far too many hardware systems to try to define them all in one group. The main purpose of identifying this group is to reserve the 'H' designation for those instrumentation organizations which choose to use the TMATS standard in this way.

The only H group attributes defined in this standard are:

- Test Item (code name H\TA) specifies the item under test and ties the H group to the G group, and
- Airborne System Type (code name H\ST-n) will distinguish which airborne systems
 are being described in the current file and will determine how the rest of the
 attributes in the H group are interpreted.



For anyone wishing to define an H group, it is strongly recommended that the conventions laid out in this standard be followed. The resultant document should maintain the look and feel of this standard for consistency.

APPENDIX A



FREQUENCY CONSIDERATIONS FOR TELEMETRY



APPENDIX A

FREQUENCY CONSIDERATIONS FOR TELEMETRY

1.0 Purpose

This appendix was prepared with the cooperation and assistance of the Range Commanders Council (RCC) Frequency Management Group (FMG). This appendix provides guidance to telemetry users for the most effective use of the ultra high frequency (UHF) telemetry bands, 1435 to 1535 MHz, 2200 to 2290 MHz, and 2310 to 2390 MHz. Coordination with the frequency managers of the applicable test ranges and operating areas is recommended before a specific frequency band is selected for a given application. Government users should coordinate with the appropriate Area Frequency Coordinator and commercial users should coordinate with the Aerospace and Flight Test Radio Coordinating Council (AFTRCC). A list of the points of contact can be found in the National Telecommunications and Information Administration's (NTIA) Manual of Regulations and Procedures for Federal Radio Frequency Management.

2.0 <u>Scope</u>

This appendix is to be used as a guide by users of telemetry frequencies at Department of Defense (DOD)-related test ranges and contractor facilities. The goal of frequency management is to encourage maximal use and minimal interference among telemetry users and between telemetry users and other users of the electromagnetic spectrum.

2.1 <u>Definitions</u>. The following terminology is used in this appendix.

Allocation (of a Frequency Band). Entry of a frequency band into the Table of Frequency Allocations¹ for use by one or more radio communication services or the radio astronomy service under specified conditions.

Assignment (of a Radio Frequency or Radio Frequency Channel). Authorization given by an administration for a radio station to use a radio frequency or radio frequency channel under specified conditions.

¹ The definitions of the radio services that can be operated within certain frequency bands contained in the radio regulations as agreed to by the member nations of the International Telecommunications Union. This table is maintained in the United States by the Federal Communications Commission and the NTIA.

<u>Authorization</u>. Permission to use a radio frequency or radio frequency channel under specified conditions.

<u>Certification</u>. The Military Communications-Electronics Board's (MCEB) process of verifying that a proposed system complies with the appropriate rules, regulations, and technical standards.

J/F 12 Number. The identification number assigned to a system by the MCEB after the Application for Equipment Frequency Allocation (DD Form 1494) is approved; for example, J/F 12/6309 (sometimes called the J-12 number).

Resolution Bandwidth. The -3 dB bandwidth of the measurement device.

2.2 Other Notations. The following notations are used in this appendix. Other references may define these terms slightly differently.

$B_{99\%}$	Bandwidth containing 99 percent of the total power
B _{-25dBm}	Bandwidth containing all components larger than -25 dBm
B _{-60dBc}	Bandwidth containing all components larger than the power
	level that is 60 dB below the unmodulated carrier power
dBc	Decibels relative to the power level of the unmodulated carrier
f_c	Assigned center frequency

3.0 Authorization to Use a Telemetry System

All RF emitting devices must have approval to operate in the United States and Possessions (US&P) via a frequency assignment unless granted an exemption by the national authority. The NTIA is the President's designated national authority and spectrum manager. The NTIA manages and controls the use of radio frequency (RF) spectrum by federal agencies in US&P territory. Obtaining a frequency assignment involves a two step process: RF spectrum support certification of major RF systems design, and operational frequency assignment to the RF system user.

3.1 <u>RF Spectrum Support Certification</u>. All major RF systems used by federal agencies must be submitted to NTIA, via the Interdepartmental Radio Advisory Committee, for system review and spectrum support certification prior to committing funds for acquisition/procurement. During the system review process, compliance with applicable RF standards, and RF allocation tables, rules, and regulations is checked. For Department of Defense (DOD) agencies, and in support of DOD contracts, this is accomplished via the submission of a DD Form 1494 to the Military Communications and Electronics Board. Noncompliance with standards, the tables, rules, or regulations can result in denial of support, limited support, or support on an unprotected non-priority basis. All RF users must obtain frequency assignments for any RF system (even if not considered major). This is accomplished by submission of frequency use proposals through the appropriate frequency management offices. Frequency

assignments may not be granted for major systems that have not obtained spectrum support certification.

- 3.1.1 <u>Frequency Allocation</u>. As stated before, telemetry systems must normally operate within the frequency bands designated for their use in the National Table of Frequency Allocations. With sufficient justification, use of other bands may at times be permitted, but the certification process is much more difficult, and the outcome is uncertain. Even if certification is granted (on a noninterference basis to other users), the frequency manager is often unable to grant assignments because of local users who will receive interference.
- 3.1.1.1 <u>Telemetry Bands</u>. Air- and space-to-ground telemetering is allocated in the UHF bands 1435 to 1535, 2200 to 2290, and 2310 to 2390 MHz, commonly known as the L band, the S band, and the upper S band.
- 3.1.1.2 <u>VHF Telemetry</u>. The very high frequency (VHF) band, 216-265 MHz, was used for telemetry operations in the past. Telemetry was moved to the UHF bands as of 1 January 1970 to prevent interference to critical government land mobile and military tactical communications. Telemetry operation in this band is strongly discouraged and is considered only on an exceptional case-by-case basis.
- 3.1.2 <u>Technical Standards</u>. The MCEB and the NTIA review proposed telemetry systems for compliance with applicable technical standards. For the UHF telemetry bands, the current revisions of the following standards are considered applicable:

RCC Document IRIG 106, Telemetry Standards

MIL-STD-461, Requirements for the Control of Electromagnetic Interference Emissions and Susceptibility

<u>Manual of Regulations and Procedures for Federal Radio Frequency Management</u> (NTIA).

Applications for certification are also thoroughly checked in many other ways including necessary and occupied bandwidths, modulation characteristics, reasonableness of output power, correlation between output power and amplifier type, and antenna type and characteristics. The associated receiver normally must be specified or referenced. The characteristics of the receiver are also verified.

3.2 <u>Frequency Authorization</u>. Spectrum certification of a telemetry system verifies that the system meets the technical requirements for successful operation in the electromagnetic environment. However, a user is not permitted to radiate with the telemetry system before requesting and receiving a specific frequency assignment. The assignment process takes into consideration when, where, and how the user plans to radiate. Use of the assignments is tightly scheduled by and among the individual ranges

to make the most efficient use of the limited telemetry radio frequency (RF) spectrum and to ensure that one user does not interfere with other users.

4.0 Frequency Usage Guidance

Frequency uses are controlled by scheduling in the areas in which the tests will be conducted. The following recommendations are based on good engineering practice for such usage.

4.1 Frequency Assignments.
Frequency scheduling for simultaneous use at the same location typically will not be made for systems whose closest 99-percent power band edges are separated by less than the 99-percent bandwidth of the wider of the two. (The signals must also comply with the spectral mask presented in paragraph 6.1 of this appendix). Figure A-1 shows the radio frequency spectrum of two signals being transmitted simultaneously.




Figure A-1. 800-kb/s and 5-Mb/s RNRZ PCM/FM signals.

The left signal center frequency is 1455.5 MHz with 800-kb/s modulation. The right signal center frequency is 1465.5 MHz with 5-Mb/s modulation. The 99-percent power bandwidths of these two signals are approximately 930 kHz and 5800 kHz. (See first line of table A-1). Therefore, the minimum center frequency separation is (930+5800)/2 + 5800 = 9165 kHz. Because all telemetry signals are centered on xxxx.5 MHz, the separation must be an integer number of MHz. The smallest integer number of MHz larger than 9165 kHz is 10 MHz. Scheduling as stated here should ensure a desired signal-to-interfering-signal ratio of at least 40 dB for two signals of equal bandwidth and effective radiated power at the same distance from the receiving antenna when the receiver bandwidth includes less than 99 percent of the desired signal's energy. In instances when this ratio is insufficient to ensure desired data quality, the frequency separation must be increased.

4.2 <u>Geographical Separation</u>. Two or more telemetry systems operating in a given geographical area² should be separated in frequency such that overlap between spectra for each pair of signals is less than 0.5 percent of the power of either in the -20 dB receiver passband of the other. Overlap separation can be provided by a combination of frequency selection, power levels, antenna positioning and aiming, and geographical separation.

²The extent of a geographical area over which the frequency use must be protected varies with the nature of the usage. For airborne systems, such an area is specified by the actual vehicle flight path and its maximum altitude.

- 4.3 <u>Simultaneous Operation</u>. Standard practice for multiple emitters at the same location, power level, and transmitting antenna direction (if applicable) is to separate signals from one another by a "guard band" greater than or equal to the occupied bandwidth of the widest bandwidth signal in each pair of adjacent frequency transmitters. When more than one transmitter is used on the same host vehicle, frequency selection should be made to minimize spectrum overlap and RF interactions. Multichannel operations should avoid channels separated by the IF frequencies of the receivers used, if possible.³
- 4.4 <u>Multicarrier Operation</u>. If two transmitters are operated simultaneously and send or receive through the same antenna system, interference due to intermodulation is likely at $(2f_1 f_2)$ and $(2f_2 f_1)$. Between three transmitters, the two-frequency possibilities exist, but intermodulation products may exist as well at $(f_1 + f_2 f_3)$, $(f_1 + f_3 f_2)$, and $(f_2 + f_3 f_1)$, where f_1 , f_2 , and f_3 represent the output frequencies of the transmitters. Intermodulation products can arise from nonlinearities in the transmitter output circuitry that cause mixing products between a transmitter output signal and the fundamental signal coming from nearby transmitters. Intermodulation products also can arise from nonlinearities in the antenna systems. The generation of intermodulation products is inevitable, but the effects are generally of concern only when such products exceed -25 dBm. The general rule for avoiding third-order intermodulation interference is that in any group of transmitter frequencies, the separation between any pair of frequencies should not be equal to the separation between any other pair of frequencies. Because individual signals have sidebands, it should be noted that intermodulation products have sidebands spectrally wider than the sidebands of the individual signals that caused them.
- 4.5 <u>Transmitter Antenna System Emission Testing</u>. Radiated tests will be made in lieu of transmitter output tests only when the transmitter is inaccessible. Radiated tests may still be required if the antenna is intended to be part of the filtering of spurious products from the transmitter or is suspected of generating spurious products by itself or in interaction with the transmitter and feedlines. The tests should be made with normal modulation.

5.0 Bandwidth

The definitions of bandwidth in this section are universally applicable. The limits shown here are applicable for telemetry operations in the telemetry bands 1435 to 1535, 2200 to 2290, and 2310 to 2390 MHz. For the purposes of telemetry signal spectral occupancy, the bandwidths used are the 99-percent power bandwidth and the -25 dBm bandwidth. A power level of -25 dBm is exactly equivalent to an attenuation of the transmitter power by $55 + 10 \times \log(P)$ dB where P is the transmitter power expressed in watts. How bandwidth is actually measured and what the limits are, expressed in terms of that measuring system, are detailed in the following paragraphs.

³In theory, at least, J/F 12 data exist on all receivers as well as transmitters.

- 5.1 Concept. The term "bandwidth" has an exact meaning in situations where an amplitude modulation (AM), double sideband (DSB), or single sideband (SSB) signal is produced with a band-limited modulating signal. In systems employing frequency modulation (FM) or phase modulation (PM), or any modulation system where the modulating signal is <u>not</u> band limited, bandwidth is infinite with energy extending toward zero and infinite frequency falling off from the peak value in some exponential fashion. In this more general case, bandwidth is defined as the band of frequencies in which most of the signal's energy is contained. The definition of "most" is imprecise. The following terms are applied to bandwidth.
- 5.1.1 <u>Authorized Bandwidth</u>. Authorized bandwidth is, for purposes of this document, the necessary bandwidth (bandwidth required for transmission and reception of intelligence) and does not include allowance for transmitter drift or Doppler shift.
- 5.1.2 Occupied Bandwidth. The width of a frequency band such that below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage of the total mean power of a given emission. Unless otherwise specified by the International Telecommunication Union (ITU) for the appropriate class of emission, the specified percentage shall be 0.5 percent. The occupied bandwidth is also called the 99-percent power bandwidth in this document.
- 5.1.3 <u>Necessary Bandwidth</u>. For a given class of emission, the width of the frequency band which is just sufficient to ensure the transmission of information at the rate and with the quality required under specified conditions.
- 5.1.3.1 The NTIA Manual of Regulations and Procedures for Federal Radio Frequency Management states that "All reasonable effort shall be made in equipment design and operation by Government agencies to maintain the occupied bandwidth of the emission of any authorized transmission as closely to the necessary bandwidth as is reasonably practicable."
- 5.1.3.2 The NTIA's equation for calculating the necessary bandwidth of binary non-return-to-zero (NRZ) continuous phase frequency shift keying (CPFSK) is

$$B_n = 3.86\Delta f + 0.27R$$
 for $0.03 < 2\Delta f/R < 1.0$ (A-1)

where

 $B_n = necessary bandwidth$

 Δf = peak frequency deviation

R = bit rate

This modulation method is commonly called NRZ pulse-code modulation (PCM)/FM by the telemetry community. For example, assume the bit rate is 1000 kb/s and the peak deviation is 350 kHz, the necessary bandwidth is calculated to be 1621 kHz (using equation (A-1)). With this bit rate and peak deviation, the 99-percent power bandwidth with no filtering would be 1780 kHz and the 99-percent power bandwidth with a premodulation filter bandwidth of 700 kHz would be approximately 1160 kHz. Equations for other modulation methods are contained in the NTIA Manual of Regulations and Procedures for Federal Radio Frequency Management.

- 5.1.4 <u>Received (or Receiver) Bandwidth</u>. The received bandwidth is usually the -3 dB bandwidth of the receiver intermediate frequency (IF) section.
- 5.2 Bandwidth Estimation and Measurement. Various methods are used to estimate or measure the bandwidth of a signal that is not band limited. The bandwidth measurements are performed using a spectrum analyzer (or equivalent device) with the following settings: 10-kHz resolution bandwidth, 1-kHz video bandwidth, and max hold detector. The IRIG Document 106-86 and earlier versions of the Telemetry Standards specified a measurement bandwidth of 3 kHz but did not specify a video bandwidth or a detector type. Spectra measured with the new standard settings will be essentially the same as spectra measured with a 3-kHz resolution bandwidth, 10-kHz video bandwidth, and a max hold detector. However, for signals with random characteristics, the average spectral density measured with a 3-kHz resolution bandwidth without the max hold detector enabled will be approximately 10 dB lower than the spectral density measured with the new settings. Theoretical expressions for power spectral density typically assume random signals and calculate the average spectral density. The average power spectral density in a 10-kHz bandwidth for random signals is approximately 5 dB lower than the spectral density measured with the standard settings (the measured values for large, continuous, discrete spectral components will be the same with an average or a max hold detector). The most common measurement and estimation methods are described in the following paragraphs.
- 5.2.1 <u>99-Percent Power Bandwidth</u>. This bandwidth contains 99 percent of the total power. The 99-percent power bandwidth is typically measured using a spectrum analyzer or estimated using equations for the modulation type and bit rate used. If the two points that define the edges of the band are not symmetrical about the assigned center frequency, their actual frequencies should be noted as well as their difference. The 99-percent power band edges of randomized NRZ (RNRZ) PCM/FM signals are illustrated in figures A-1 and A-2. Table A-1 presents the 99-percent power bandwidth for several digital modulation methods as a function of the bit rate (R).

TABLE A-1. 99% POWER BANDWIDTHS FOR VARIOUS DIGITAL MODULATION METHODS4

Description	99% Power Bandwidth
NRZ PCM/FM, premod filter BW=0.7R, Δf=0.35R	1.16 R
NRZ PCM/FM, no premod filter, Δf=0.25R	1.18 R
NRZ PCM/FM, no premod filter, Δf=0.35R	1.78 R
NRZ PCM/FM, no premod filter, Δf=0.40R	1.93 R
NRZ PCM/FM, premod filter BW=0.7R, Δf=0.40R	1.57 R
Minimum shift keying (MSK), no filter	1.18 R
Feher's-patented quadrature phase shift keying (FQPSK-B)	0.78 R
Phase shift keying (PSK), no filter	19.30 R
Quadrature phase shift keying (QPSK), no filter	9.65 R
Offset QPSK (OQPSK), sinusoidal weighting	1.18 R

⁴I. Korn, <u>Digital Communications</u>, New York, Van Nostrand, 1985.

5.2.2 -25 dBm Bandwidth. The bandwidth beyond which all power levels are below -25 dBm. A power level of -25 dBm is exactly equivalent to an attenuation of the transmitter power by 55 + 10×log(P) dB where P is the transmitter power expressed in watts. The -25 dBm bandwidth limits are shown in figure A-2. The -25 dBm bandwidth is primarily a function of the modulation method, transmitter power, and bit rate. The transmitter design and construction




Figure A-2. RNRZ PCM/FM signal.

techniques also strongly influence the -25 dBm bandwidth. With a bit rate of 5 Mb/s and a transmitter power of 5 watts the -25 dBm bandwidth of an NRZ PCM/FM system with near optimum parameter settings is about 12.8 MHz, while the -25 dBm bandwidth of an equivalent FQPSK-B system is about 7.1 MHz.

5.2.3 Other Bandwidth Measurement Methods. The previous methods are the standard methods for measuring the bandwidth of telemetry signals. The following methods are also sometimes used to measure or to estimate the bandwidth of telemetry signals.

5.2.3.1 Below Unmodulated Carrier. This method measures the power spectrum with respect to the unmodulated carrier power. To calibrate the measured spectrum on a spectrum analyzer, the unmodulated carrier power must be known. This power level is the 0-dB reference (commonly set to the top of the display). In AM systems, the carrier power never changes; in FM and PM systems, the carrier power is a function of the modulating signal. Since angle modulation (FM or PM) by its nature spreads the spectrum of a constant amount of power, a method to estimate the unmodulated carrier power is required if the modulation can not be turned off. For most practical angle modulated systems, the total carrier power at the spectrum analyzer input can be found by setting the spectrum analyzer's resolution and video bandwidths to their widest settings, setting the analyzer output to max hold, and allowing the analyzer to make several sweeps (see figure A-3). The maximum value of this trace will be a good approximation of the unmodulated carrier level. Figure A-3 shows the spectrum of a 5-Mb/s RNRZ PCM/FM signal measured using the standard spectrum analyzer settings discussed previously and the spectrum measured using 3-MHz resolution, video bandwidths, and max hold. The peak of the spectrum measured with the latter conditions is very close to 0 dBc and can be used to estimate the unmodulated carrier power (0 dBc) in the presence of frequency or phase modulation. In practice, the 0-dBc calibration would be performed first, and the display settings would then be adjusted to use the peak of the curve as the reference level (0-dBc level) to calibrate the spectrum measured using the standard spectrum analyzer settings. With the spectrum analyzer set for a specific resolution bandwidth, video bandwidth, and detector type, the bandwidth is taken as the distance between the two points outside of which the

spectrum is thereafter some number (say, 60 dB) below the unmodulated carrier power determined above. The -60 dBc bandwidth for the 5-Mb/s signal shown in figure A-3 is approximately 13 MHz.

The -60 dBc bandwidth of a random NRZ PCM/FM signal with a peak deviation of 0.35R, a four-pole premodulation filter with -3 dB corner at 0.7R, and a bit rate greater than or equal to 1 Mb/s can be approximated by

$$B_{-60dBc} = \{2.78 - 0.3 \times \log_{10}(R)\} \times R \text{ (A-2)}$$

where B is in MHz and R is in Mb/s. Thus the -60 dBc bandwidth of a 5-Mb/s RNRZ signal under these conditions would be 12.85 MHz. The -60 dBc bandwidth will be greater if peak deviation is increased or the number of filter poles is decreased.

5.2.3.2 Below Peak. This method is not recommended for measuring the bandwidth of telemetry signals. The modulated peak method is the least accurate measurement method, measuring between points where the spectrum is thereafter XX dB below the level of the highest point on the modulated spectrum. Figure A-4 shows the radio frequency spectrum of a 400-kb/s Bi\(\phi\)-L PCM/PM signal with a peak deviation of 75° and a premodulation filter bandwidth of 800 kHz. The largest peak has a power level of -7 dBc. In comparison, the largest peak in figure A-3 had a power level of -22 dBc. This 15-dB difference




Figure A-3. Spectrum analyzer calibration of 0-dBc level.




Figure A-4. Bio PCM/PM signal.

would skew a bandwidth comparison that used the peak level in the measured spectrum as a common reference point. In the absence of an unmodulated carrier to use for calibration, the below peak measurement is often (erroneously) used and described as a below unmodulated carrier measurement. Using max hold exacerbates this effect still further. In all instances the bandwidth is overstated, but the amount varies.

5.2.3.3 <u>Carson's Rule</u>. Carson's Rule is a method to estimate the bandwidth of an FM subcarrier system. Carson's Rule states that

$$B = 2 \times (\Delta f + f_{max}) \tag{A-3}$$

where B is the bandwidth, Δf is the peak deviation of the carrier frequency, and f_{max} is the highest frequency in the modulating signal. Figure A-5 shows the spectrum that results when a 12-channel constant




Figure A-5. FM/FM signal and Carson's Rule.

bandwidth multiplex with 6-dB/octave pre-emphasis frequency modulates an FM transmitter. The 99-percent power bandwidth and the bandwidth calculated using Carson's Rule are also shown. Carson's Rule will estimate a value greater than the 99-percent power bandwidth if little of the carrier deviation is due to high-frequency energy in the modulating signal.

5.2.4 <u>Spectral Equations</u>. The following equations can be used to calculate the RF spectra for several digital modulation methods with unfiltered waveforms.^{5 6 7} These equations can be modified to include the effects of filtering.^{8 9}

Random NRZ PCM/FM (valid when D≠integer, D = 0.5 gives MSK spectrum)

$$S(f) = \frac{4 B_{SA}}{R} \left(\frac{D}{\pi (D^2 - X^2)} \right)^2 \frac{(\cos \pi D - \cos \pi X)^2}{1 - 2 \cos \pi D \cos \pi X + \cos^2 \pi D}, \quad \cos \pi D < Q$$
 (A-4)

⁵I. Korn, <u>Digital Communications</u>, New York, Van Nostrand, 1985.

⁶M. G. Pelchat, "The Autocorrelation Function and Power Spectrum of PCM/FM with Random Binary Modulating Waveforms," <u>IEEE Transactions</u>, Vol. SET-10, No. 1, pp. 39-44, March 1964.

⁷W. M. Tey, and T. T. Tjhung, "Characteristics of Manchester-Coded FSK," <u>IEEE Transactions on Communications</u>, Vol. COM-27, pp. 209-216, January 1979.

⁸A. D. Watt, V. J. Zurick, and R. M. Coon, "Reduction of Adjacent-Channel Interference Components from Frequency-Shift-Keyed Carriers," <u>IRE Transactions on Communication Systems</u>, Vol. CS-6, pp. 39-47, December 1958.

⁹E. L. Law, "RF Spectral Characteristics of Random PCM/FM and PSK Signals," <u>International Telemetering Conference Proceedings</u>, pp. 71-80, 1991.

Random NRZ PSK

$$S(f) = \frac{B_{SA}}{R} \frac{\sin^2\left(\frac{\pi X}{2}\right)}{\left(\frac{\pi X}{2}\right)^2}$$
(A-5)

Random NRZ QPSK and OQPSK

$$S(f) = \frac{2B_{SA}}{R} \frac{\sin^2(\pi X)}{(\pi X)^2} \tag{A-6}$$

Random Bio PCM/FM

$$S(f) = \frac{B_{SA}}{4R} \left(\frac{\pi D}{2} \frac{\sin\left(\frac{\pi(X-D)}{4}\right)}{\frac{\pi(X-D)}{4}} \frac{\sin\left(\frac{\pi(X+D)}{4}\right)}{\frac{\pi(X+D)}{4}} \right)^{2} + \left(\frac{D\sin(\frac{\pi D}{2})}{\frac{\pi(X^{2}-D^{2})}{2}}\right)^{2} \delta\{(f-f_{c}) - nR\}$$
 (A-7)

Random Bio PCM/PM

$$S(f) = \frac{B_{SA} \sin^2(\beta)}{R} \frac{\sin^4\left(\frac{\pi X}{4}\right)}{\left(\frac{\pi X}{4}\right)^2} + \cos^2(\beta)\delta(f - f_c), \quad \beta \le \frac{\pi}{2}$$
(A-8)

where

S(f)= power spectrum (dBc) at frequency f = spectrum analyzer resolution bandwidth \mathbf{B}_{SA} R = bit rate D $= 2\Delta f/R$ X $= 2(f-f_c)/R$ Δf = peak deviation = peak phase deviation in radians β f_c = carrier frequency δ = Dirac delta function n $=0,\pm 1,\pm 2,...$ = quantity related to narrow band spectral peaking when D≈1, 2, 3, ... Q ≈ 0.99 for $B_{SA} = 0.003$ R, Q ≈ 0.9 for $B_{SA} = 0.03$ R Q

The spectrum analyzer resolution bandwidth term was added to the original equations.

5.2.5 Receiver Bandwidth. Receiver predetection bandwidth is measured at the points where the response to the carrier before demodulation is -3 dB from the center frequency response. The carrier bandwidth response of the receiver is, or is intended to be, symmetrical about the carrier in most instances. Figure A-6 shows the response of a typical telemetry receiver with a 1 MHz IF bandwidth selected. Outside the stated bandwidth, the response usually falls sharply with the response often 20 dB or more below the passband response at 1.5 to 2 times the passband response. The rapid falloff outside the passband is required to reduce interference from nearby channels and has no other effect on data.




Figure A-6. Typical receiver IF filter response (-3 dB bandwidth = 1 MHz).

- 5.2.6 <u>Receiver Noise Bandwidth</u>. For the purpose of calculating noise in the receiver, the bandwidth must be integrated over the actual shape of the IF, which, in general, is not a square-sided function. Typically, the figure used for noise power calculations is the -3 dB bandwidth of the receiver.
- 5.3 <u>Phase-Modulated Systems</u>. Telemetry systems using phase modulation (PM) rather than frequency modulation (FM) produce spectra that may be considerably wider than the corresponding FM signal. This extra sideband energy is reduced in most systems by filtering at the modulation input, or the transmitter output, or both, and sideband energy is reconstructed in the receiving apparatus as part of the demodulation process. Phase-modulation systems, even with more than one data bit per symbol, are not necessarily more spectrally efficient than FM transmissions.

- 5.4 <u>Symmetry</u>. Many modulation methods produce a spectrum that is asymmetrical with respect to the carrier frequency. Exceptions include FM/FM systems, randomized NRZ PCM/FM systems, and randomized FQPSK-B systems. The most extreme case of asymmetry is due to single-sideband transmission, which places the carrier frequency at one edge of the occupied spectrum. If the spectrum is *not* symmetrical about the band center, the bandwidth and the extent of asymmetry must be noted for frequency management purposes.
- 5.5 FM Transmitters (ac coupled). The ac-coupled FM transmitters should not be used to transmit NRZ signals unless the signals to be transmitted are randomized because changes in the ratio of "ones" to "zeros" will increase the occupied bandwidth and may degrade the bit error rate. When ac-coupled transmitters are used with randomized NRZ signals, it is recommended that the lower -3 dB frequency response of the transmitter be no greater than the bit rate divided by 4000. For example, if a randomized 1-Mb/s NRZ signal is being transmitted, the lower -3 dB frequency response of the transmitter should be no larger than 250 Hz.

6.0 Spectral Occupancy Limits

Telemetry applications covered by this standard shall use 99-percent power bandwidth to define occupied bandwidth and -25 dBm bandwidth as the primary measure of spectral efficiency. The spectra are assumed symmetrical about the center frequency unless specified otherwise. The primary reason for controlling the spectral occupancy is to control adjacent channel interference, thereby allowing more users to be packed into a given amount of frequency spectrum. The adjacent channel interference is determined by the spectra of the signals and the filter characteristics of the receiver.

6.1 Spectral Mask. One common method of describing the spectral occupancy limits is a spectral mask. The aeronautical telemetry spectral mask is described below. Note that the mask in this standard is different than and in general narrower than the mask contained in the 1996 and 1999 versions of the Telemetry Standards. All spectral components larger than $-(55 + 10 \times \log(P))$ dBc, or in other words larger than -25 dBm, at the transmitter output must be within the spectral mask calculated using the following equation:

$$M(f) = K + 90\log R - 100\log|f - f_c|; \qquad |f - f_c| \ge \frac{R}{m}$$
 (A-9)

where

M(f) = power (dBc) at frequency f (MHz)

K = -20 for analog signals

K = -28 for binary signals

K = -63 for quaternary signals (e.g., FQPSK-B)

 f_C = transmitter center frequency (MHz)

R = bit rate (Mb/s) for digital signals or $(\Delta f + f_{max})(MHz)$ for analog FM signals

m = number of states in modulating signal;

m = 2 for binary signals

m = 4 for quaternary signals and analog signals Δf = peak deviation f_{max} = maximum modulation frequency

The -25 dBm bandwidth is not required to be narrower than 1 MHz. The first term in equation (A-9) accounts for bandwidth differences between modulation methods. Equation (A-9) can be rewritten as $M(f) = K - 10\log R - 100\log |(f-f_c)/R|$. When equation (A-9) is written this way, the 10logR term accounts for the increased spectral spreading and decreased power per unit bandwidth as the modulation rate increases. The last term forces the spectral mask to roll off at 30-dB/octave (100-dB/decade). Any error detection or error correction bits, which are added to the data stream, are counted as bits for the purposes of this spectral mask. The quaternary signal spectral mask is based on the measured power spectrum of FQPSK-B. The binary signal spectral mask is primarily based on the power spectrum of a random binary NRZ PCM/FM signal with peak deviation equal to 0.35 times the bit rate and a multipole premodulation filter with a -3 dB frequency equal to 0.7 times the bit rate (see figure A-7). This peak deviation minimizes the bit error rate (BER) with an optimum receiver bandwidth while also providing a compact RF spectrum. The premodulation filter attenuates the RF sidebands while only degrading the BER by the equivalent of a few tenths of a dB of RF power. Further decreasing of the premodulation filter bandwidth will only result in a slightly narrower RF spectrum, but the BER will increase dramatically. Increasing the premodulation filter bandwidth will result in a wider RF spectrum, and the BER will only be decreased slightly. The recommended premodulation filter for NRZ PCM/FM signals is a multipole linear phase filter with a -3 dB frequency equal to 0.7 times the bit rate. The unfiltered NRZ PCM/FM signal rolls off at 12-dB/octave so at least a threepole filter (filters with four or more poles are recommended) is required to achieve the 30-dB/octave slope of the spectral mask. The spectral mask includes the effects of reasonable component variations (unit-to-unit and temperature).

6.2 Spectral Mask Examples. Figures A-7 and A-8 show the binary spectral mask of equation (A-9) and the RF spectra of the 1-Mb/s randomized NRZ PCM/FM signals. The RF spectra were measured using a spectrum analyzer with 10-kHz resolution bandwidth, 1-kHz video bandwidth, and a max hold detector. The span of the frequency axis is 5 MHz. The transmitter power was 5 watts, and the peak deviation was 350 kHz. The modulation signal for figure A-7 was filtered with a 4-pole linear-phase filter with -3 dB frequency of 700 kHz. All spectral components in figure A-7 were contained within the spectral mask. The minimum value of the spectral mask was -62 dBc (equivalent to -25 dBm). The peak modulated signal power levels were about 15 dB below the unmodulated carrier level (-15 dBc), and the power levels near center frequency were about -17 dBc. Figure A-8 shows the same signal with no premodulation filtering. The signal was not contained within the spectral mask when a pre-modulation filter was not used.

Figure A-9 shows the quaternary mask of equation (A-9) and the RF spectrum of a 1-Mb/s FQPSK-B signal. The transmitter power was assumed to be 10 watts in this example so the minimum value of the mask was -65 dBc. The peak value of the FQPSK-B signal was about -13 dBc.

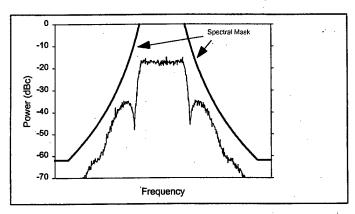


Figure A-7. Filtered 1-Mb/s RNRZ PCM/FM signal and spectral mask.

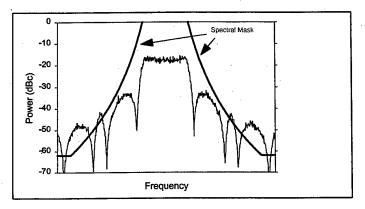


Figure A-8. Unfiltered 1-Mb/s RNRZ
PCM/FM signal and spectral mask.

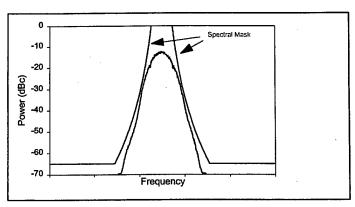


Figure A-9. Typical 1-Mb/s FQPSK-B signal and spectral mask.

7.0 FOPSK-B Characteristics

Feher's-patented quadrature phase shift keying ¹⁰ ¹¹ (FQPSK-B) modulation is a variation of offset quadrature phase shift keying (OQPSK). OQPSK is described in most communications textbooks. A generic OQPSK (or quadrature or I & Q) modulator is shown in figure A-10. In general, the odd bits are applied to one channel (say Q), and the even bits are applied to the I channel.




Figure A-10. OQPSK modulator.

If the values of I and Q are ± 1 , we get the diagram shown in figure A-11. For example, if I=1 and Q=1 then the phase angle is 45 degrees $\{(I,Q)=(1,1)\}$. A constant envelope modulation method, such as minimum shift keying (MSK), would follow the circle indicated by the small dots in figure A-11 to go between the large dots. In general, bandlimited QPSK and OQPSK signals are not constant envelope and would not follow the path indicated by the small dots but rather would have a significant amount of amplitude variation.





Figure A-11. I & Q constellation.

¹⁰ K. Feher et al.: US Patents 4,567,602; 4,644,565; 5,491,457; and 5,784,402, post-patent improvements and other U.S. and international patents pending.

¹¹ Kato, Shuzo and Kamilo Feher, "XPSK: A New Cross-Correlated Phase Shift Keying Modulation Technique," <u>IEEE Trans. Comm.</u>, vol. COM-31, May 1983.

The typical implementation of FQPSK-B involves the application of data and a bit rate clock to the baseband processor of the quadrature modulator. The data are differentially encoded and converted to I and Q signals as described in Chapter 2. The FQPSK-B I and Q channels are then cross-correlated, and specialized wavelets are assembled that minimize the instantaneous variation of $(I^2(t) + Q^2(t))$. The FQPSK-B baseband wavelets are illustrated in figure A-12. The appropriate wavelet is assembled based on the current and immediate past states of I and Q. Q is delayed by one-half symbol (one bit) with respect to I as shown in figure A-13.

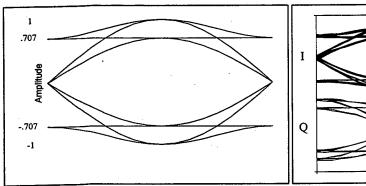

I Q

Figure A-12. FQPSK-B wavelets.

Figure A-13. FQPSK-B I & Q eye diagrams (at input to IQ modulator).

A common method of looking at I-Q modulation signals is called a vector diagram. One method of generating a vector diagram is to use an oscilloscope that has an XY mode. The vector diagram is generated by applying the I signal to the X input and the Q signal to the Y input. A sample vector diagram of FQPSK-B at the input terminals of an I-Q modulator is illustrated in figure A-14. Note that the vector diagram values are always within a few percent of being on a circle. The vector diagram of generalized filtered OQPSK would have more amplitude variations than FQPSK-B, and the vector




Figure A-14. FQPSK-B vector diagram.

diagram of QPSK would go through the origin. Any amplitude variations may cause spectral spreading at the output of a non-linear amplifier.

A typical FQPSK-B spectrum measured at the output of a fully saturated RF non-linear amplifier with a random pattern of "1's" and "0's" applied to the input is illustrated in figure A-15. The bit rate for figure A-15 was 1 Mb/s. The peak of the spectrum will be approximately -12-10log(R), where R is in Mb/s. The 99-percent bandwidth of FQPSK-B is typically about 0.78 times the bit rate. Note that with a properly randomized data sequence and proper transmitter design, FQPSK-B does not have discernable sidebands.




Figure A-15. FQPSK-B spectrum with random input data.

Figure A-16 illustrates FQPSK-B transmitter output with all "1's" as the input signal. With an all "1's" input the differential encoder, cross-correlator, and wavelet selector provide unity amplitude sine and cosine waves with a frequency equal to 0.25 times the bit rate to the I and Q modulator inputs. The resulting signal (from an ideal modulator) would be a single frequency component offset from the carrier frequency by exactly +0.25 times the bit rate. The amplitude of this component would be equal to 0 dBc. If




Figure A-16. FQPSK-B spectrum with all 1's input and large modulator errors.

modulator errors exist (they always will), additional frequencies will appear in the spectrum as shown in figure A-16. The spectral line at a normalized frequency of 0 (carrier frequency) is referred to as the remnant carrier. This component is largely caused by DC imbalances in the I and Q signals. The remnant carrier power in figure A-16 is approximately -31 dBc. Well designed FQPSK-B transmitters will have a remnant carrier level less than -25 dBc. The spectral component offset, 0.25 times the bit rate below the carrier frequency, is the other sideband. This component is largely caused by unequal amplitudes in I and Q and by a lack of quadrature between I and Q. The power in this component should be limited to -30 dBc or less for good system performance.

Figure A-17 shows the measured bit error probability (BEP) versus signal energy per bit/noise power per Hz (E_b/N_0) of one FQPSK-B modulator/demodulator combination including non-linear amplification and differential encoding/decoding in an additive white Gaussian noise environment (AWGN) with no fading. Other combinations of equipment may have different performance. Computer simulations have




Figure A-17. FQPSK-B BEP vs E_b/N_0 .

shown that a BEP of 10^{-5} may be achievable with an E_b/N_0 of slightly greater than 11 dB (with differential encoding/decoding). The purpose of the differential encoder/decoder is to resolve the phase detection ambiguities that are inherent in QPSK, OQPSK, and FQPSK-B modulation methods. The differential encoder/decoder used in this standard will cause one isolated symbol error to appear as two bits in error at the demodulator output. However, many aeronautical telemetry channels are dominated by fairly long burst error events, and the effect of the differential encoder/decoder will typically be masked by the error events.

APPENDIX B

USE CRITERIA FOR FREQUENCY DIVISION MULTIPLEXING

APPENDIX B

USE CRITERIA FOR FREQUENCY DIVISION MULTIPLEXING

1.0 General

Successful application of Frequency Division Multiplexing Telemetry Standards depends on recognition of performance limits and performance tradeoffs, which may be required in implementation of a system. The use criteria included in this appendix are offered in this context as a guide for orderly application of the standards, which are presented in chapter 3. It is the responsibility of the telemetry system designer to select the range of performance that will meet data measurement requirements and at the same time permit operation within the limits of the standards. A designer or user must also recognize the fact that even though the standards for FM/FM multiplexing encompass a broad range of performance limits, tradeoffs such as data accuracy for data bandwidth may be necessary. Nominal values for such parameters as frequency response and rise time are listed to indicate the majority of expected use and should not be interpreted as inflexible operational limits. It must be remembered that system performance is influenced by other considerations such as hardware performance capabilities. In summary, the scope of the standards together with the use criteria is intended to offer flexibility of operation and yet provide realistic limits.

2.0 FM Subcarrier Performance

The nominal and maximum frequency response of the subcarrier channels listed in tables 3-1 and 3-2 is 10 and 50 percent of the maximum allowable deviation bandwidth. The nominal frequency response of the channels employs a deviation ratio of five. The deviation ratio of a channel is one-half the defined deviation bandwidth divided by the cutoff frequency of the discriminator output filter.

- 2.1 The use of other deviation ratios for any of the subcarrier channels listed may be selected by the range users to conform with the specific data response requirements for the channel. As a rule, the rms signal-to-noise ratio (SNR) of a specific channel varies as the three-halves power of that subcarrier deviation ratio.
- 2.2 The nominal and minimum channel rise times indicated in tables 3-1 and 3-2 have been determined from the equation which states that rise time is equal to 0.35 divided by the frequency response for the nominal and maximum frequency response. The equation is normally employed to define 10 to 90 percent rise time for a step function of the channel input signal. However, deviations from these values may be encountered because of variations in subcarrier components in the system.

3.0 FM Subcarrier Performance Tradeoffs

The number of subcarrier channels which may be used simultaneously to modulate an RF carrier is limited by the RF channel bandwidth and by the output SNR that is acceptable for the application at hand. As channels are added, it is necessary to reduce the transmitter deviation allowed for each individual channel to keep the overall multiplex with the RF channel assignment. This reduction lowers the subcarrier-to-noise performance at the discriminator inputs. Thus, the system designer's problem is to determine acceptable tradeoffs between the number of subcarrier channels and acceptable subcarrier-to-noise ratios.

- 3.1 Background information relating to the level of performance and the tradeoffs that may be made is included in <u>Telemetry FM/FM Baseband Structure Study</u>, volumes I and II; which were completed under a contract administered by the Telemetry Working Group of IRIG. The Defense Technical Information Center (DTIC) access numbers for these documents dated 14 June 1965 are AD-621139 and AD-621140. The results of the study show that proportional bandwidth channels with center frequencies up to 165 kHz and constant bandwidth channels with center frequencies up to 176 kHz may be used within the constraints of these standards. The test criteria included the adjustment of the system components for approximately equal SNRs at all of the discriminator outputs with the receiver input near RF threshold. Intermodulation, caused by the radio-link components carrying the composite multiplex signal, limits the channel's performance under large signal conditions.
- 3.2 With subcarrier deviation ratios of four, channel data errors on the order of 2 percent rms were observed. Data channel errors on the order of 5 percent rms of full-scale bandwidth were observed when subcarrier deviation ratios of two were employed. When deviation ratios of one were used, it was observed that channel-data errors exceeded 5 percent. Some channels showed peak-to-peak errors as high as 30 percent. It must be emphasized, however, that the results of the tests performed in this study are based on specific methods of measurement on one system sample and that this system sample represents a unique configuration of components. Systems having different performance characteristics may not yield the same system performance.
- 3.3 System performance may be improved, in terms of better data accuracy, by sacrificing system data bandwidth; that is, if the user is willing to limit the number of subcarrier channels in the multiplex, particularly the higher frequency channels, the input level to the transmitter can be increased. The SNR of each subcarrier is then improved through the increased per-channel transmitter deviation. For example, the baseband structure study indicated that when the 165 kHz channel and the 93 kHz channel were not included in the proportional-bandwidth multiplex, performance improvement can be expected in the remaining channels equivalent to approximately 12 dB increased transmitter power.
- 3.4 Likewise, elimination of the five highest frequency channels in the constant bandwidth multiplex allowed a 6-dB increase in performance.

3.5 A general formula, which can be used to estimate the thermal noise performance of an FM/FM channel above threshold, is as follows.

$$\left(\frac{S}{N}\right)_{d} = \left(\frac{S}{N}\right)_{c} \quad \left(\frac{3}{4}\right)^{1/2} \quad \left[\frac{B_{c}}{F_{ud}}\right]^{1/2} \quad \left(\frac{f_{dc}}{f_{s}}\right) \quad \left(\frac{f_{ds}}{F_{ud}}\right),$$

where

$$\left(\frac{S}{N}\right)_{d}$$
 = discriminator output signal-to-noise ratio (rms voltage ratio),

$$\left(\frac{S}{N}\right)$$
 = receiver carrier-to-noise ratio (rms voltage ratio),

$$f_{ds}$$
 = subcarrier peak deviation.

If the RF carrier power is such that the thermal noise is greater than the intermodulation noise, the above relation provides estimates accurate to within a few decibels. Additional information is contained in RCC document 119-88, <u>Telemetry Applications Handbook</u>.

3.6 The FM/FM composite-multiplex signal used to modulate the RF carrier may be a proportional-bandwidth format, a constant-bandwidth format, or a combination of the two types provided only that guard bands allowed for channels used in a mixed format be equal to or greater than the guard band allowed for the same channel in an unmixed format.

4.0 FM System Component Considerations

System performance is dependent on all components in the system. Neglecting the effects of the RF and recording system, data channel accuracy is primarily a function of the linearity and frequency response of the subcarrier oscillators and discriminators employed. Systems designed to transmit data frequencies up to the nominal frequency responses shown in tables 3-1 and 3-2 have generally well-known response capabilities, and reasonable data accuracy estimates can be easily made. For data-channel

¹ K. M. Uglow, *Noise and Bandwidth in FM/FM Radio Telemetry*, IRE Transaction on Telemetry and Remote Control, pp. 19-22 (May 1957).

requirements approaching the maximum frequency response of tables 3-1 and 3-2, oscillator and discriminator characteristics are less consistent and less well-defined, making data accuracy estimates less dependable.

- 4.1 The effect of the RF system on data accuracy is primarily in the form of noise because of intermodulation at high RF signal conditions well above threshold. Under low RF signal conditions, noise on the data channels is increased because of the degraded SNR existing in the receiver.
- 4.2 Intermodulation of the subcarriers in a system is caused by character-istics such as amplitude and phase nonlinearities of the transmitter, receiver, magnetic tape recorder/reproducer, or other system components required to handle the multiplex signal under the modulation conditions employed. In systems employing preemphasis of the upper subcarriers, the lower subcarriers may experience intermodulation interference because of the difference frequencies of the high-frequency and high-amplitude channels.
- 4.3 The use of magnetic tape recorders for recording a subcarrier multiplex may degrade the data channel accuracy because of the tape speed differences or variations between record and playback. These speed errors can normally be compensated for in present discriminator systems when the nominal response rating of the channels is employed and a reference frequency is recorded with the subcarrier multiplex.

5.0 Range Capability For FM Subcarrier Systems

See the following subparagraphs for additional range capabilities.

- 5.1 <u>Receivers and Tape Recorders</u>. The use of subcarrier frequencies greater than 2 MHz may require tape recorders of a greater capability than are in current use at some ranges. It is recommended that users, who anticipate employing any of the above channels at a range, check the range's capability at a sufficiently early date to allow procurement of necessary equipment.
- 5.2 <u>Discriminator Channel Selection Filters</u>. Inclusion of the higher frequency proportional-bandwidth channels and the constant-bandwidth channels may require the ranges to acquire additional band selection filters. In addition to referencing tables 3-1 and 3-2 for acquiring channel-selector filters, consideration should also be given to acquiring discriminators corresponding to the predetection carrier frequencies shown in table 6-6. In applications where minimum time delay variation within the filter is important, such as tape speed compensation or high-rate PAM or PCM, constant-delay filter designs are recommended.

APPENDIX C

PCM STANDARDS

APPENDIX C

PCM STANDARDS ADDITIONAL INFORMATION AND RECOMMENDATIONS

1.0 Bit Rate Versus Receiver Intermediate-Frequency Bandwidth

The following subparagraphs contain information about selection of receiver intermediate-frequency (IF) bandwidths. Additional information is contained in RCC document 119, <u>Telemetry Applications Handbook</u>.

- 1.1 The standard receiver IF bandwidth values are listed in table 2-1. Not all bandwidths are available on all receivers or at all test ranges. Additional bandwidths may be available at some test ranges. The IF bandwidth, for data receivers, should typically be selected so that 90 to 99 percent of the transmitted power spectrum is within the receiver 3 dB bandwidth.
- 1.2 For reference purposes, in a well-designed PCM/FM system (NRZ-L data code) with peak deviation equal to 0.35 times the bit rate and an IF bandwidth (3 dB) equal to the bit rate, a receiver IF signal-to-noise ratio (SNR) of approximately 13 dB will result in a bit error probability (BEP) of 10⁻⁶. A 1 dB change in this SNR will result in approximately an order of magnitude change in the BEP. The relationship between BEP and IF SNR in a bandwidth equal to the bit rate is illustrated in figure C-1 for IF bandwidths equal to the bit rate and 1.5 times the bit rate. An approximate expression for the BEP is

BEP =
$$0.5 e^{(k \times SNR)}$$




Figure C-1. BEP versus IF SNR in bandwidth = bit rate for NRZ-L PCM/FM.

where

 $k \approx -0.7$ for IF bandwidth equal to bit rate

 $k \approx -0.65$ for IF bandwidth equal to 1.2 times bit rate

 $k \approx -0.55$ for IF bandwidth equal to 1.5 times bit rate

 $SNR = IF SNR \times IF bandwidth/bit rate.$

Other data codes and modulation techniques have different BEP versus SNR performance characteristics.

1.3 It is recommended that the maximum period between bit transitions be 64-bit intervals to ensure adequate bit synchronization. Table C-1 contains recommended frame synchronization patterns for general use in PCM telemetry.

2.0 Recommended PCM Synchronization Patterns

Table C-1 contains recommended fram synchronization patterns for general use in PCM telemetry. Patterns are shown in the preferred order of transmission with "111" being the first bit sequence transmitted. This order is independent of data being LSB or MSB aligned. The technique used in the determination of the patterns for lengths 16 through 30 was essentially that of the patterns of 2ⁿ binary patterns off a given length, n, for that pattern with the smallest total probability of false synchronization over the entire pattern overlap portion of the ground station fram synchronization¹. The patterns for lengths 31 through 33 were obtained from a second source².

3.0 Spectral and BEP Comparisons for NRZ and Biφ³

Figure C-2 shows the power spectral densities of baseband NRZ and Biφ codes with random data. These curves were calculated using the equations presented below. Figure C-3 presents the theoretical bit error probabilities versus signal-to-noise ratio for the level, mark, and space versions of baseband NRZ and Biφ codes and also for RNRZ-L. The noise is assumed to be additive white gaussian noise.

¹ A more detailed account of this investigation can be found in a paper by J. L. Maury, Jr. and J. Styles, "Development of Optimum Frame Synchronization Codes for Goddard Space Flight Center PCM Telemetry Standards," in <u>Proceedings of the National Telemetering Conference</u>, June 1964.

² The recommended synchronization patterns for lengths 31 through 33 are discussed more fully in a paper by E. R. Hill, "Techniques for Synchronizing Pulse-Code Modulated Telemetry," in <u>Proceedings of the National Telemetering Conference</u>, May 1963.

³ Material presented in paragraph 3.0 is taken from a study by W. C. Lindsey (University of Southern California), <u>Bit Synchronization System Performance</u> Characterization, <u>Modeling and Tradeoff Study</u>, Naval Missile Center Technical Publication.

$$NRZ$$
 $SPECTRAL$ $DENSITY \propto \frac{\sin^2(\pi fT)}{(\pi fT)^2}$
 $Bi\phi$ $SPECTRAL$ $DENSITY \propto \frac{\sin^4(\pi fT/2)}{(\pi fT/2)^2}$

where T is the bit period.

									,	,						0	00	000
RY													0	00	000	000	000	0111
TELEMET										0	00	000	000	000	000	010	010	010
OR PCM							0	00	000	000	000	000	000	000	100	000	000	010
FTERNS F	·			0	00	000	000	000	100	100	110	110	011	101	110	101	101	001
OPTIMUM FRAME SYNCHRONIZATION PATTERNS FOR PCM TELEMETRY	0	. 00	000	000	000	000	000	100	100	000	100	100	110	100	100	110	100	101
HRONIZA	000	000	000	010	001	011	101	110	100	111	101	100	010	011	001	111	101	011
ME SYNC	001	101	101	001	110	001	110	100	111	110	110	101	110	110	111	110	110	010
TUM FRA	111	110	110	011	011	101	110	011	101	010	100	101	011	011	101	100	100	111
	010	100	100	110	011	011	100	101	110	110	110	110	101	101	110	1111	111	110
TABLE C-1	Patterns 111	111	111	111	111	111	111	111	111	111	111	1111	1111	111	111	111	111	111
	Pattern <u>Length</u> 16	. 17	18	19	20	21	22	23	24	25	56	27	28	29	30	31	32	33

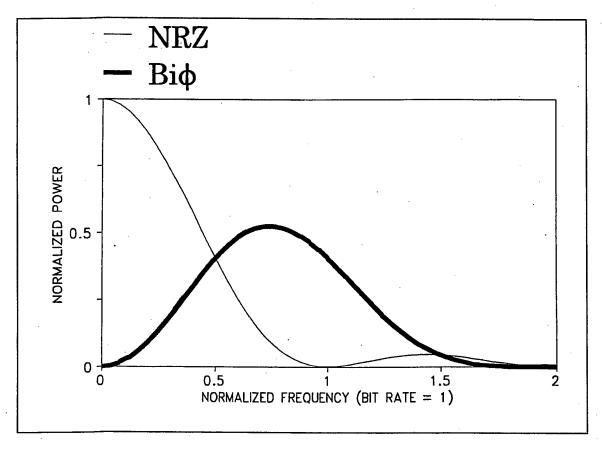


Figure C-2. Spectral densities of random NRZ and Biφ codes.

4.0 PCM Frame Structure Examples

Figures C-4, C-5, and C-6 show examples of allowable PCM frame structures. In each example, the Minor Frame Sync Pattern is counted as one word in the minor frame. The first word after the Minor Frame Sync Pattern is word 1.

Figures C-5 and C-6 show the preferred method of placing the subframe ID counter in the minor frame. The counter is placed before the parameters that are referenced to it.

Major Frame Length is as follows:

Figure C-4 - Major Frame Length = Minor Frame Maximum Length.

Figure C-5 - Major Frame Length = Minor Frame Maximum Length multiplied by Z.

Figure C-6 - Major Frame Length = Minor Frame Maximum Length multiplied by Z.

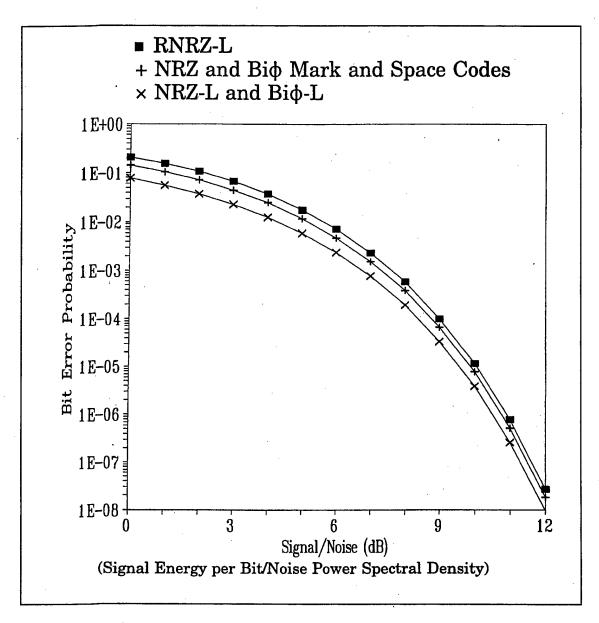


Figure C-3. Theoretical bit error probability performance for various baseband PCM signaling techniques (perfect bit synchronization assumed).

	_	·	
†	Word N-1	Param A(X)	
	Word N-2	m Param Param Param Param Param Param Param Param A2 A3 A4, A5, A6,, A(X) are sampled once each Minor Frame. 1. Param P	
	• • •	ne.	
ords		nor Fran	
its 1024 wc	:	each Mi	
Minor Frame Maximum Length, N Words or B Bits Class I Shall not exceed 8192 bits nor exceed 1024 words Class II 16, 384 Bits	Word 10	Param Supercommutated on the Minor Frame. The rate of A2 is equal to the number of sam e	
N Word bits nor	Word Word Word Word Word Word 6 7 8 9 10	Param A2 re sample of A2 is	
Length,	Word 8	Param A6 A(X) au	
tximum not exce 84 Bits	Word 7	Param A5 A6,, Trame.	
rame Ma Shall 16, 3	Word 6	Param A2 A4, A5 Minor J	
Minor Frame Maximum Class I Shall not exc Class II 16, 384 Bits	Word 5	Param A4 A1, A3,	-
.	Word 4	Param A3 ters A0, mmnutate	
	Word 3	Param A2 Parame superco tte.	
	Word Word Word Word Word	Param Param Param Param Param A4 A0 A1 A2 A3 A4 A4 A4 Parameters A0, A1, A Parameter A2 is supercommutated on to the Minor Frame Rate.	
	Word 1	Param Param Param A0 A1 Parameter A2 is su Minor Frame Rate.	
		Minor Frame Sync Pattern	

Figure C-4. Major Frame Length = Minor Frame Maximum Length.

				[}											ſ	<u>.</u>	
		Word N-1		Param A(X)													Param	A(X)
		Word N-2		Param A2													Param	A2
		:		:													:	
	its	:	•	:													:	
its	6,384 B	:		:								٠					:	
Minor Frame Maximum Length, N Words or B Bits	Class I Shall not exceed 8192 bits nor exceed 1024 words; Class II 16,384 Bits	Word 10		Param C1	Param C2	Param	8	Param	2	Param C5	Param	92	Param	3	 Param	C(Z-10	Param	CZ
V Word	rds; Cla	Word 9	-	Param A2													Param	A2
ength, I	.024 wo	Word 8		Param A6													Param	9V
imum L	exceed 1	Word 7		Param A5							٠						Param	A5
ne Max	oits nor	Word 6	-	Param A2													Param	A2
or Fran	d 8192 l	Word	•	Param A4							<u></u>			-	 •	-	Param	A4
Min	ot excee	Word 4	-	Param B1	Param B2	Param	B3	Param	B4	Param R2	Param	B5	Param	B6	 Param	B2	Param	BZ
	- Shall n	Word 3		Param A2							. 1	7					Param	A2
	lass I	Word 2		FFI	1												FFI	
	<u>5</u>	Word 1		SFID =1	SFID =2	SFID	=3	SFID	7	SFID	SFID	9=	SFID	=2			SFID	Z=
	\			Minor Frame Sync Pattern													Minor Frame	Sync Pattern

Figure C-5. Major Frame Length = Minor Frame Maximum Length multiplied by Z.

The Frame Format Identifier (Word 2) is shown in the preferred position as the first word following the ID counter.

Parameters B1, B3, B4, B5, ..., BZ, and C1, C2, C3, ..., CZ are sampled once each Subframe, at 1/Z multipled by the Minor Frame rate.

Parameter B2 is supercommutated on the Subframe and is sampled at less than the Minor Frame rate, but greater than the Subframe rate.

Minor Frame Maximum Length, N Words or B Bits	Word N-2 N-2 N-1		SFID1 FFI Param SFID2 Param Param Param Param Param Param Param Param Param Action Image: Control of the param Image: Control of the param	SFID2 Param Param Param	B2 E2	1 SFID2 Param Param P		SFID1 Param Param Param	=4 B4 E4 C4	SFID1 Param Param Param	=5 =5 B2 C5	SFID1 : Param : Param	=6 C6	SFID1 Param Param Param	=7 =D B6	Dagon	Farain C(Z-1) C(Z-1)	n Param Param Param Param	A2 =N BZ A2 A5 EN A2	SFD1 and SFD2 are subframe counters.
ļ ,	Word 2	- -												1		Т		\downarrow		bframe cour
	Word		SFID1 =1	SFID1	=2	SFID1	=3	SFID1	#	SFID1	=	SFID1	9	SFID1	_=7		• • •	SFID1	Z=	D2 are sul
		,	Minor Frame Sync Pattern			•												Minor Frame	Sync Pattern	SFID1 and SF

Figure C-6. Major Frame Length = Minor Frame Maximum Length multiplied by Z.

Location of the B and C parameters are given by the Minor Frame word number and the SFID1 counter. Location of the E parameters are given by the Minor Frame word number and the SFID2 counter.

SFID1 has a depth Z<256; SFID2 has a depth D which is <Z. Z divided by D is not an integer.

APPENDIX D

MAGNETIC TAPE RECORDER AND REPRODUCER INFORMATION AND USE CRITERIA

APPENDIX D

MAGNETIC TAPE RECORDER AND REPRODUCER INFORMATION AND USE CRITERIA

1.0 Other Instrumentation Magnetic Tape Recorder Standards

The X3B6 Committee of the American National Standards Institute and the International Standards Organizations have prepared several standards for instrumentation magnetic tape recording. Documents may be obtained by contacting the

American National Standards Institute, Inc. 1430 Broadway New York, NY 10018 Telephone (212) 354-3300

The following documents may be of interest:

ISO 1860 Information Processing - Precision reels for magnetic tape used in interchange instrumentation applications.

ISO 6068 Information Processing - Telemetry systems (including the recording characteristics of instrumentation magnetic tape) - interchange practices and recommended test methods.

ISO 6371 Information Processing - Interchange requirements and test methods for unrecorded instrumentation magnetic tape.

ISO 8441/1 High Density Digital Recording (HDDR) - Part 1: Unrecorded magnetic tape for HDDR applications.

ISO 8441/2 High Density Digital Recording (HDDR) - Part 2: Interchange requirements and test methods for HDDR applications (including the characteristics of recorded magnetic tape).

ANSI X3.175-1990 19 mm Type 1D-1 Recorded Instrumentation - Digital Cassette Tape Format.

2.0 <u>Double-Density Longitudinal Recording</u>

Wide band double-density analog recording standards allowing recording of up to 4 MHz signals at 3048 mm/s (120 ips) are included in these standards. For interchange purposes, either narrow track widths 0.635 mm (25 mils) must be employed, or other special heads must be used. These requirements are necessary because of the difficulty in maintaining individual head-segment gap-azimuth alignment across a head close enough to keep each track's response within the ±2-dB variation allowed by the standards. Moreover, at the lower tape speeds employed in double-density recording, the 38-mm (1.5-in.) spacing employed in interlaced head assemblies results in interchannel time displacement variations between odd and even tracks that may be unacceptable for some applications. For those reasons, it was decided that a 14-track in-line configuration on 25.4-mm (1-inch) tape should be adopted as a standard. This configuration results in essentially the same format as head number one of the 28-track interlaced configuration in the standards.

- 2.1 The 14-track interlaced heads are not compatible with tapes produced on an in-line standard configuration, and if tapes must be interchanged, a cross-configuration dubbing may be required, or a change of head assemblies on the reproducing machine is necessary.
- 2.2 High energy magnetic tape is required for double-density systems. Such tapes are available but may require special testing for applications requiring a low number of dropouts per track.
- 2.2.1 Other Track Configurations. The previously referenced standards include configurations resulting in 7, 14, and 21 tracks in addition to the 14- and 28-track configurations listed in chapter 6. The HDDR standards also reference an 84-track configuration on 50.8-mm (2-inch) tape. Figure D-1 and table D-1 show the 7 track on 12.7-mm (1/2-inch) tape, table D-2 shows the 14 track on 12.7-mm (1/2-inch) tape, and table D-3 shows the 42 track on 25.4-mm (1-inch) tape configurations.
- 2.2.2 <u>High-Density PCM Recording</u>. High-density digital recording systems are available from most instrumentation recorder manufacturers. Such systems will record at linear packing densities of 33 000-bits-per-inch or more per track. Special systems are available for error detection and correction with overhead penalties depending on the type and the sophisti-cation of the system employed. The HDDR documents listed in paragraph 1.0 of this appendix reference six different systems that have been produced; others are available.

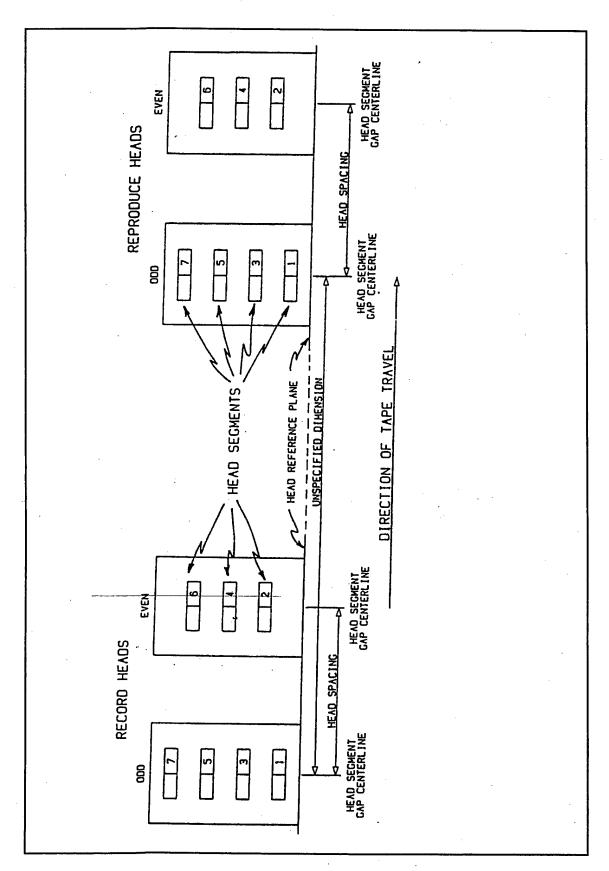


Figure D-1. Record and reproduce head and head segment identification and location (7-track interlaced system).

TABLE D-1. DIMENSIONS - RECORDED TAPE FORMAT, 7 TRACKS INTERLACED ON 12.7-mm (1/2 in.) WIDE TAPE (REFER TO FIGURE 6-1).

Parameters		Millimeters	5	Incl	hes
	Maximum		Minimum		
Track Width	1.397		1.143	0.050	±0.005
Track Spacing		1.778		0.070	
Head Spacing:					
Fixed Heads	38.125		38.075	1.500	±0.001
Adjustable Heads	38.151		38.049	1.500	±0.002
Edge Margin, Minimum		0.127		0.005	
Reference Track			•		
Location	1.067		0.965	0.040	±0.002
Track Location					
Tolerance	0.051	•	-0.051		±0.002
			Location of nth	track	
Track Number		Millimeters	3	Inc	<u>hes</u>
	<u>Maximum</u>		<u>Minimum</u>		
1 (Reference)	0.000		0.000	(0.000
2	1.829		1.727	(0.070
3	3.607		3.505	(0.140
4	5.385		5.283	(0.210
5	7.163		7.061	(0.280
6	8.941		8.839	. (0.350
. 7	10.719	•	10.617	. (0.420

TABLE D-2. DIMENSIONS - RECORDED TAPE FORMAT, 14-TRACKS
INTERLACED ON 12.7-mm (1/2 in.) WIDE TAPE (REFER TO FIGURE 6-1).

Parameters	Ŋ	Millimeters	Incl	nes
	<u>Maximum</u>	<u>Minimum</u>		
Track Width	0.660	0.610	0.025	±0.001
Track Spacing		0.889	0.035	
Head Spacing:			•	
Fixed Heads	38.125	38.075	1.500	±0.001
Adjustable Heads	38.151	. 38.049	1.500	±0.002
Edge Margin, Minimum		0.127	0.005	
Reference Track				
Location	0.546	0.470	0.0200	±0.001
Track Location	• .			
Tolerance	0.038	-0.038		±0.0015
		Location of n	th track	
Track Number	<u>1</u>	<u>Millimeters</u>	Inc	<u>hes</u>
	<u>Maximum</u>	<u>Minimum</u>		
1 (Reference)	0.000	0.000	0.0	000
2	0.927	0.851	0.0	035
3	1.816	1.740	0.	070
4	2.705	2.629	0.	105
5	3.594	3.518	0.	140
6	4.483	4.407	0.	175
7	5.372	5.292	0.	210
8	6.261	6.185	0.	245
9	7.150	7.074	0.	280
10	8.039	7.963	0.	315
11	8.928	8.852	0.	350
12	9.817	9.741	0.	385
13	10.706	10.630	0.	420
14	11.595	11.519	0.	455

TABLE D-3. DIMENSIONS - RECORDED TAPE FORMAT, 42-TRACKS INTERLACED ON 25.4-mm (1-in.) WIDE TAPE (REFER TO FIGURE 6-1).

Parameters		Millimeters		Inc	hes
	<u>Maximum</u>		<u>Minimum</u>		
Track Width	0.483		0.432	0.018	±0.001
Track Spacing		0.584		0.023	
Head Spacing:					
Fixed Heads	38.125		38.075	1.500	±0.001
Adjustable Heads	38.151		38.049	1.500	±0.002
Edge Margin, Minimum		0.305		0.012	
Reference Track			-		
Location	0.737		0.660	0.0275	±0.015
Track Location					
Tolerance	0.025		-0.025		±0.0000
	•		Location of nt	h track	
Track Number	· ,	Millimeters		Inc	ches
	Maximum	•	<u>Minimum</u>		
1 (Reference)	0.000	•	0.000		0.000
2	0.610		0.559		0.023
3	1.194		1.143		0.046
4	1.778		1.727	•	0.069
5	2.362		2.311		0.092
6	2.946		2.896	•	0.115
7	3.531		3.480		0.138
8	4.115		4.064		0.161
9	4.699		4.648		0.184
10	5.283		5.232		0.207
11	5.867		5.817		0.230
12	6.452		6.401		0.253
13	7.036		6.985		0.276
14	7.620		7.569		0.299
15	8.204		8.153		0.322
16	8.788		8.738		0.345

TABLE D-3. (CONT'D) DIMENSIONS - RECORDED TAPE FORMAT, 42-TRACKS INTERLACED ON 25.4-mm (1-in.) WIDE TAPE (REFER TO FIGURE 6-1).

		Location of nth trac	<u>k</u>
Track Number	<u>M</u>	<u> Iillimeters</u>	Inches
	<u>Maximum</u>	<u>Minimum</u>	
17	9.373	9.322	0.368
18	9.957	9.906	0.391
19	10.541	10.490	0.414
20	11.125	11.074	0.437
21	11.709	11.659	0.460
22	12.294	12.243	0.483
23	12.878	12.827	0.506
24	13.462	13.411	0.529
25	14.046	13.995	0.552
26	14.630	14.580	0.575
27	15.215	15.164	0.598
28	15.799	15.748	0.621
29	16.383	16.332	0.664
30	16.967	16.916	0.667
31	17.551	17.501	0.690
32	18.136	18.085	0.713
33	18.720	18.660	0.736
34	19.304	19.253	0.759
35	19.888	19.837	0.782
36	20.472	20.422	0.805
37	21.057	21.006	0.828
38	21.641	21.590	0.851
39	22.225	22.174	0.874
40	22.809	22.758	0.897
41	23.393	23.343	0.920
42	23.978	23.927	0.943

3.0 Serial HDDR

The following subparagraphs give some background for selecting the bi-phase and RNRZ-L systems specified in subparagraph 6.11.3, chapter 6 of this document.

- 3.1 Serial HDDR is a method of recording digital data on a magnetic tape where the digital data is applied to one track of the recording system as a bi-level signal. The codes recommended for serial HDDR recording of telemetry data are Biφ-L and randomized NRZ-L (RNRZ-L) (refer to paragraph 6.11, chapter 6).
- 3.2 In preparing paragraph 6.11 of chapter 6, the following codes were considered: Delay Modulation (Miller Code), Miller Squared, Enhanced NRZ, NRZ Level, NRZ Mark, and NRZ Space. These codes are not recommended for interchange applications at the bit rates given in paragraph 6.11.
- 3.3 The properties of the Bi\u03c4-L and RNRZ-L codes relevant to serial HDDR and the methods for generating and decoding RNRZ-L are described next. Recording with bias is required for interchange applications, because reproduce amplifier phase and amplitude equalization adjustments for tapes recorded without bias usually differ from those required for tapes recorded with bias.
- 3.4 The Bi\u00f3-L and RNRZ-L codes were selected for this standard because the "level" versions are easier to generate and are usually available as outputs from bit synchronizers. "Mark" and "Space" codes also have about twice as many errors as the level codes for the same SNR. If polarity insensitivity is a major consideration, agreement between interchange parties should be obtained before these codes are used.
- 3.5 Some characteristics of the $Bi\phi$ -L code favorable to serial HDDR are listed in the following subparagraphs.
- 3.5.1 Only a small proportion of the total signal energy occurs near dc.
- 3.5.2 The maximum time between transitions is a 1-bit period.
- 3.5.3 The symbols for one and zero are antipodal; that is, the symbols are exact opposites of each other. Therefore, the bit error probability versus SNR performance is optimum.
- 3.5.4 The Biφ-L can be decoded using existing bit synchronizers.
- 3.5.5 The Biφ-L is less sensitive to misadjustments of bias and reproducer equalizers than most other codes.
- 3.5.6 The Bi ϕ -L performs well at low tape speeds and low bit rates.

- 3.6 The most unfavorable characteristic of the $Bi\phi$ -L code is that it requires approximately twice the bandwidth of NRZ. Consequently, the maximum bit packing density that can be recorded on magnetic tape is relatively low.
- 3.7 Characteristics of the RNRZ-L code which favor its use for serial HDDR are included in the following subparagraphs.
- 3.7.1 The RNRZ-L requires approximately one-half the bandwidth of Bi ϕ -L.
- 3.7.2 The symbols for one and zero are antipodal; therefore, the bit error probability versus SNR performance is optimum.
- 3.7.3 The RNRZ-L decoder is self-synchronizing.
- 3.7.4 The RNRZ-L data can be bit synchronized and signal conditioned using existing bit synchronizers with the input code selector set to NRZ-L.
- 3.7.5 The RNRZ-L code is easily generated and decoded.
- 3.7.6 The RNRZ-L data can be easily decoded in the reverse mode of tape playback.
- 3.7.7 The RNRZ-L data are bit detected and decoded using a clock at the bit rate. Therefore, the phase margin is much larger than that of codes that require a clock at twice the bit rate for bit detection.
- 3.7.8 The RNRZ-L code does not require overhead bits.
- 3.8 Unfavorable characteristics of the RNRZ-L code for serial HDDR are described next.
- 3.8.1 Long runs of bits without a transition are possible although the probability of occurrence is low, and the maximum run length can be limited by providing transitions in each data word.
- 3.8.2 Each isolated bit error that occurs after the data has been randomized causes 3-bit errors in the derandomized output data.
- 3.8.3 The decoder requires 15 consecutive error-free bits to establish and reestablish error-free operation.
- 3.8.4 The RNRZ-L bit stream can have a large low frequency content. Consequently, reproducing data at tape speeds which produce PCM bit rates less than 200 kb/s is not recommended unless a bit synchronizer with specially designed dc and low frequency restoration circuitry is available.

3.9 Randomizer for RNRZ-L

The randomizer is implemented with a network of shift registers and modulo-2 adders (exclusive-OR gates). The RNRZ-L bit stream is generated by adding (modulo-2) the reconstructed NRZ-L PCM data to the modulo-2 sum of the outputs of the 14th and 15th stages of a shift register. The output RNRZ-L stream is also the input to the shift register (see figure D-2).

3.9.1 The properties of an RNRZ-L bit stream are similar to the properties of a pseudo-random sequence. A 15-stage RNRZ-L encoder will generate a maximal length pseudo-random sequence of 2¹⁵-1 (32 767) bits if the input data consists only of zeros and there is at least a single one in the shift register. A maximal length pseudo-random sequence is also generated when the input data consists only of ones and the shift register contains at least a single zero. However, if the shift register contains all zeros at the moment that the input bit stream is all zeros, the RNRZ-L output bit stream will also be all zeros. The converse is also true: when the shift register is filled with ones and the input bit stream is all ones, the RNRZ-L output bit stream will contain only ones. In these two cases, the contents of the shift register does not change and the output data is not randomized.

However, the randomizer is not permanently locked-up in this state because a change in the input data will again produce a randomized output. In general, if the input bit stream contains runs of X bits without a transition with a probability of occurrence of p(X), the output will contain runs having a length of up to (X+15) bits with a probability of $(2^{-15} \times p(X))$. Therefore, the output can contain long runs of bits without a transition, but the probability of occurrence is low.

- 3.9.2 The RNRZ-L bit stream is decoded (derandomized) by adding (modulo-2) the reconstructed RNRZ-L bit stream to the modulo-2 sum of the outputs of the 14th and 15th stages of the shift register. The reconstructed RNRZ-L bit stream is the input to the shift register (see figure D-3). The RNRZ-L data which is reproduced using the reverse playback mode of operation is decoded by adding (modulo-2) the reconstructed RNRZ-L bit stream to the modulo-2 sum of the outputs of the 1st and 15th stages of the shift register (see figure D-3). The net effect is that the decoding shift register runs "backwards" with respect to the randomizing shift register.
- 3.9.3 Although the RNRZ-L decoder is self-synchronizing, 15 consecutive error-free bits must be loaded into the shift register before the output data will be valid. A bit slip will cause the decoder to lose synchronization, and 15 consecutive error-free data bits must again be loaded into the shift register before the output data is valid. The decoded output data, although correct, will contain the bit slip causing a shift in the data with respect to the frame synchronization pattern. Therefore, frame synchronization must be reacquired before the output provides meaningful data.

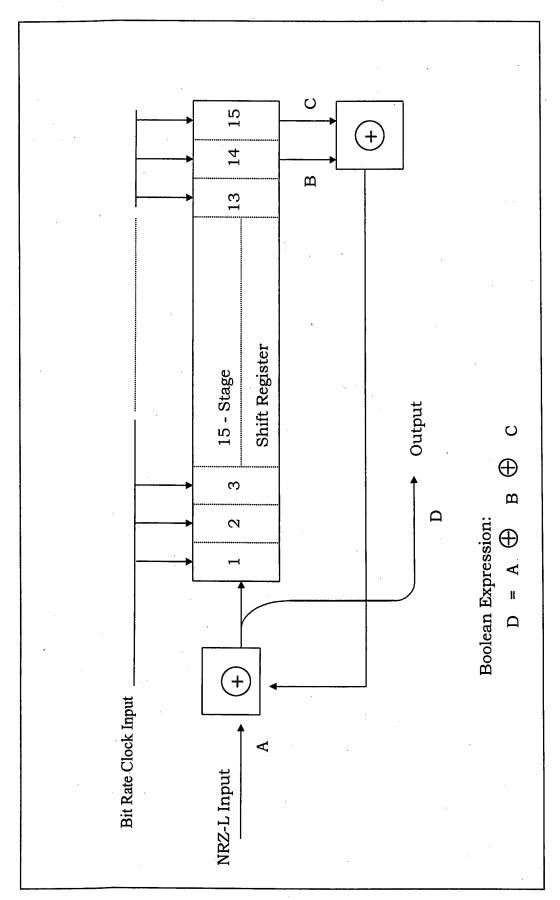


Figure D-2. Randomizer block diagram.

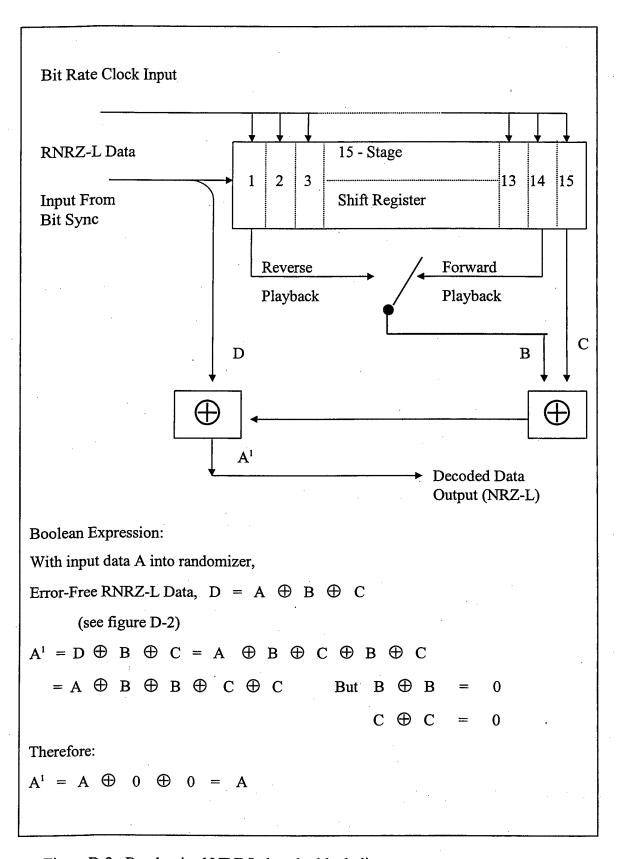


Figure D-3. Randomized NRZ-L decoder block diagram.

- 3.9.4 The RNRZ-L decoding system has an error multiplication factor of 3 for isolated bit errors (separated from adjacent bit errors by at least 15 bits). An isolated bit error introduced after randomization will produce 3 errors in the output data; the original bit in error, plus 2 additional errors 14 and 15 bits later. In addition, a burst of errors occurring after the data has been randomized will produce a burst of errors in the derandomized output. The number of errors in the output depends on the distribution of errors in the burst and can be greater than, equal to, or less than the number of errors in the input to the derandomizer. However, the derandomization process always increases the number of bits between the first and last error in the burst by 15. Errors introduced prior to randomization are not affected by either the randomizer or the derandomizer. The reverse decoder has the same bit error properties as the forward decoder.
- 3.9.5 Input data containing frequent long runs of bits without transitions creates potential dc and low frequency restoration problems in PCM bit synchronizers because of the low frequency cutoff of direct recorder and reproducer systems. The restoration problem can be minimized by reproducing the data at tape speeds that produce a bit rate for which the maximum time between transitions is less than 100 microseconds. Additional methods of minimizing these effects include selecting bit synchronizers containing special dc and low frequency restoration circuitry or recording data using Biφ-L code.
- 3.9.6 The power spectra of the RNRZ-L and Biφ-L codes are shown in figure D-4. The power spectral density of RNRZ-L is concentrated at frequencies, which are less than one-half the bit rate. The power spectral density of Biφ-L is concentrated at requencies in a region around 0.75 times the bit rate. The concentration of energy in the low-frequency region (when using the RNRZ-L code) has the effect of reducing the SNR as well as creating baseline wander, which the bit synchronizer must follow. Therefore, reproducing data at tape speeds which produce PCM bit rates of less than 200 kb/s is not recommended when using RNRZ-L unless a bit synchronizer with specially designed dc and low frequency restoration circuitry is available.
- 3.9.7 Alignment of the reproducer system is very important to reproducing high quality PCM data, that is, with the lowest possible bit error probability. A PCM signature using the standard 2047-bit pseudo-random pattern, recorded on the leader or the trailer tape, provides a good method for reproducer alignment. When a pseudo-random bit error detection system is not available or when a PCM signature signal is not recorded, the recommended procedure for reproducer alignment involves the use of the eye pattern technique. The eye pattern is the result of superpositioning the zeros and ones in the PCM bit stream. The eye pattern is displayed on an oscilloscope by inserting the raw reproduced bit stream into the vertical input and the reconstructed bit-rate clock into the external synchronization input of the oscilloscope. The reproducer head azimuth, amplitude equalizers, and phase equalizers are then adjusted to produce the eye pattern with the maximum height and width opening.

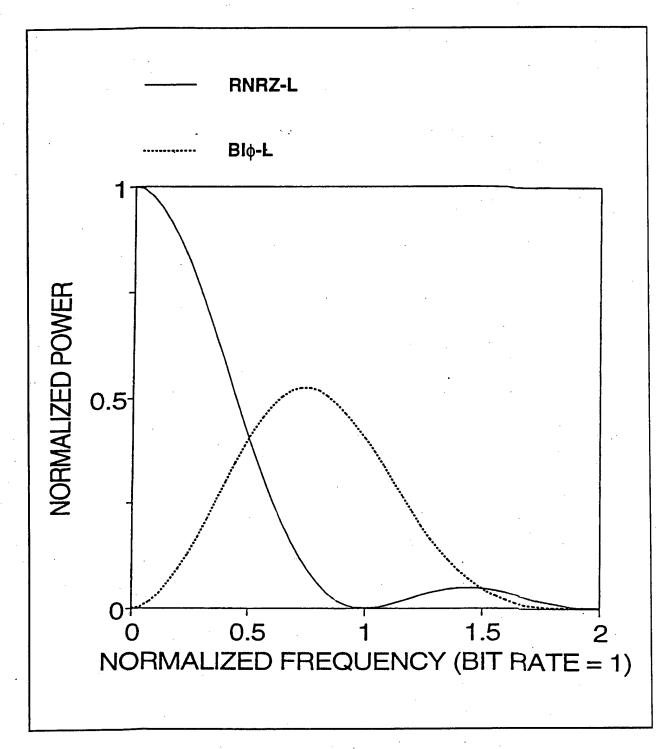


Figure D-4. Random PCM power spectra.

3.9.8 Sample eye patterns are shown in figure D-5. Figure D-5(a) shows a Bi\u03a9-L eye pattern at a recorded bit packing density of 15 kb/in (450 kb/s at 30 ips). Figure D-5(b) shows an RNRZ-L eye pattern at a recorded bit packing density of 25 kb/in (750 kb/s at 30 ips).

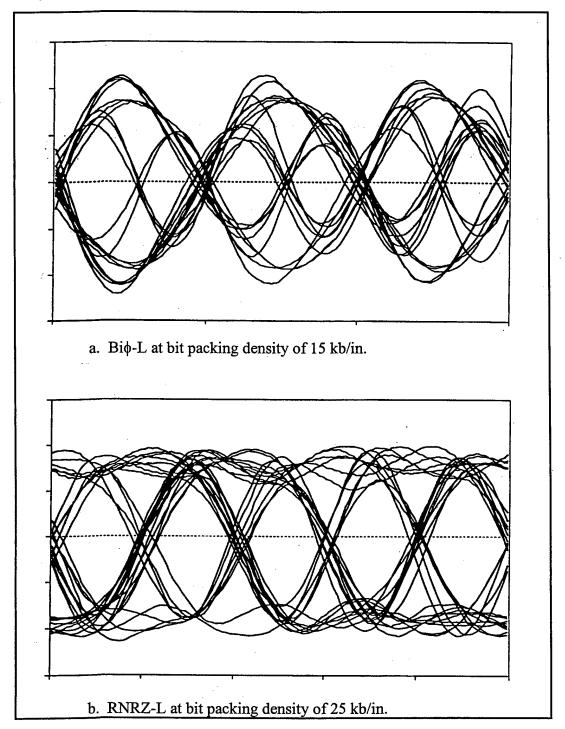


Figure D-5. Sample eye patterns at output of recorder/reproducer.

4.0 Head Parameters

The following subparagraphs describe the head parameters.

- 4.1 <u>Gap Scatter</u>. Refer to the definitions in subparagraphs 6.2.30 and 6.2.31 in chapter 6. Gap scatter contains components of azimuth misalignment and deviations from the average line defining the azimuth. Since both components affect data simultaneity from record to reproduce, the measurement is the inclusive distance containing the combined errors. Because azimuth adjustment affects the output of wide band systems, a 5.08-μm (0.0002-in.) gap scatter is allowed for such recorders and reproducers. A 2.54-μm (0.0001-in.) gap scatter is recommended for fixed-head systems (see upper illustration in figure 6-3).
- 4.2 <u>Head Polarity</u>. The requirement that a positive pulse at a record amplifier input generate a south-north-north-south magnetic sequence and that a south-north-north-south magnetic sequence on tape produce a positive pulse at the reproduce amplifier output, still leaves two interdependent parameters unspecified. These parameters are (1) polarity inversion or noninversion in record and playback amplifiers and (2) record or playback head winding sense. For the purpose of head replacement, it is necessary that these parameters be determined by the user so that an unsuspected polarity inversion, on tape or off tape, will not occur after heads are replaced.

5.0 Record Level

The standard record level is established as the input level of a sinusoidal signal set at the record level set frequency which, when recorded, produces a signal containing 1 percent third harmonic distortion at the output of a properly terminated reproduce amplifier (see subparagraph 4.1.3.3 of volume III, RCC document 118). A 1 percent harmonic distortion content is achieved when the level of the third harmonic component of the record level set frequency is 40 ±1 dB below the level of a sinusoidal signal of 0.3 UBE which is recorded at the standard record level. Standard test and operating practice is to record and reproduce sinusoidal signals at 0.1 and 0.3 UBE and adjust the equalizers as necessary to establish the reproduced output at 0.3 UBE to within ±1.0 dB of the output at 0.1 UBE. Then a 1 V rms signal at the record level set frequency is applied to the record amplifier input and the record and reproduce level controls are adjusted until the reproduced output contains 1 percent third harmonic distortion at a level of 1 V rms.

The optimum level for recording data will seldom be equal to the standard record level. Signals having noise-like spectral distribution such as baseband multiplexes of FM subcarriers contain high crest factors so that it may be necessary (as determined in paragraph 1.1, Noise Power Ratio (NPR) Test, volume IV, RCC document 118, Test Methods for Data Multiplex Equipment) to record at levels below the standard record level. On the other hand, for predetection and HDDR recording, signals may have to be recorded above the standard record level to give optimum performance in the data system.

6.0 Tape Crossplay Considerations

Figure D-6 illustrates the typical departure from optimum frequency response that may result when crossplaying wide band tapes which were recorded with heads employing different record-head gap lengths. Line AA is the idealized output-versus-frequency plot of a machine with record bias and record level, set upper IRIG standards, using a 3.05-μm (120-microinch) record-head gap length and a 1.02-μm (40-microinch) reproduce-head gap length. Lines BB and CC represent the output response curves of the same tapes recorded on machines with 5.08-μm (200-microinch) and 1.27-μm (50- microinch) record-head gap lengths. Each of these recorders was set up individually per IRIG requirements. The tapes were then reproduced on the machine having a 1.02-μm (40-microinch) reproduce-head gap length without readjusting its reproduce equalization.

- 6.1 The output curves have been normalized to 0 dB at the 0.1 UBE frequency for the purpose of clarity. The normalized curves may be expected to exhibit a ± 2.0 dB variance in relative output over the passband. The tape recorded with the shortest head segment gap length will provide the greatest relative output at the UBE.
- 6.2 While the examples shown are from older equipment with record gap lengths outside the limits recommended in subparagraph 6.5.4, chapter 6, they illustrate the importance of the record gap length in tape interchange applications.

7.0 Standard Tape Signature Procedures

The following subparagraphs describe the PCM signature and the swept-frequency signature.

7.1 <u>PCM Signature Recording Procedures</u>. Configure test equipment as described in paragraph 2.1, volume IV, RCC document 118. The configuration should simulate the operational link as closely as possible, for example, same RF frequency, deviation, bit rate, code type, predetection frequency, receiver bandwidth, and recorder speed.

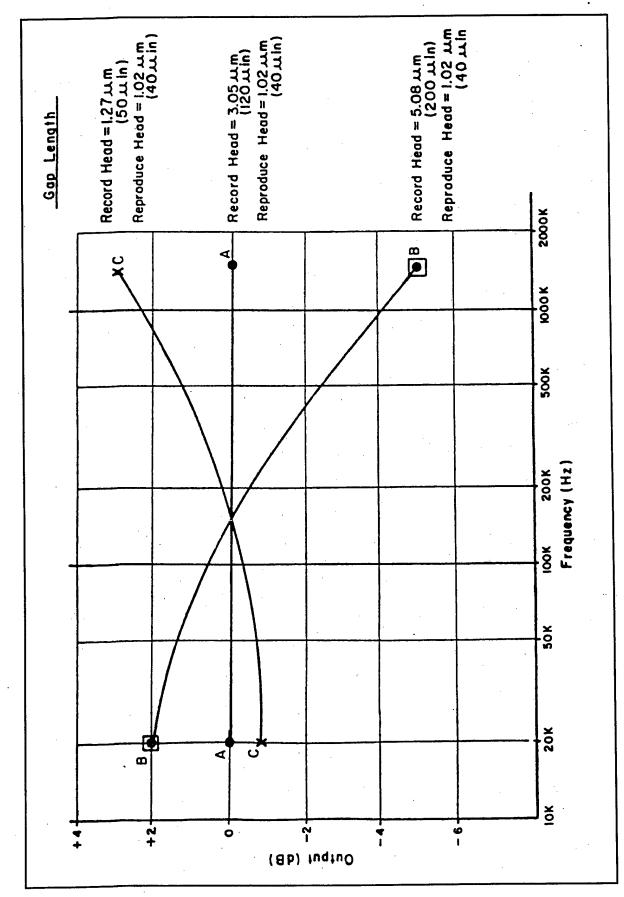


Figure D-6. Tape crossplay.

- 7.1.1 While recording the pseudo-random data at standard record level, adjust the signal generator output level until approximately one error per 10⁵ bits is obtained on the error counter.
- 7.1.2 Record 30 seconds of the pseudo-random data at the beginning or end of the tape for each data track. A separate 30-second tape signature is recommended for each different data format.
- 7.1.3 The content, track assignments, and location on the tape leader and trailer of signature signals should be noted on the tape label.
- 7.2 <u>PCM Signature Playback Procedure</u>. The following subparagraphs explain the playback procedure.
- 7.2.1 Optimize playback equipment such as receiver tuning and bit synchronizer setup for data being reproduced.
- 7.2.2 Reproduce the tape signature and observe the error rate on the error counter.
- 7.2.3 Optimize head azimuth for maximum signal output and minimum errors.
- 7.2.4 If more than one error per 10⁴ bits is obtained, initiate corrective action.
- 7.2.5 Repeat for each data track.
- 7.3 <u>Swept Frequency Signature Recording Procedure</u>. The following subparagraphs describe the recording procedure for the swept-frequency signature.
- 7.3.1 Patch a sweep-frequency oscillator output to all prime data tracks (up to 6 on 7-track recorders or up to 13 on 14-track recorders) (see appendix A, volume III of RCC document 118). As a minimum, patch the sweep oscillator to one odd and one even track.
- 7.3.2 Connect the sync output of the sweep oscillator to a track not used for sweep signals, preferably an outside track.
- 7.3.3 Record the signature signals for a minimum of 30 seconds at standard record level.



Record levels may be either preadjusted or quickly adjusted in all tracks during the first few seconds of the signature recording.

- 7.3.4 The content, track assignments, and location on the leader or trailer tape of signature signals should be noted on the tape label.
- 7.4 <u>Swept-Frequency Signature Playback Procedure</u>. The following subparagraphs define the steps for the playback procedure.
- 7.4.1 Connect the sync track output of the reproducer to the sync input of the scope.
- 7.4.2 Select an odd-numbered sweep-signal track and connect the output of the reproducer to the vertical input of the scope. Playback the sweep signal and adjust the scope gain for an amplitude of approximately ± 10 minor vertical divisions about the center baseline. Adjust the odd-track azimuth for maximum amplitude of the highest frequency segment (extreme right of the sweep pattern).
- 7.4.3 Observe amplitude variations through the sweep pattern and adjust the equalization, if necessary, to maintain the amplitude within the required tolerance over the required frequency range.



A decrease of sweep signal amplitude to about 0.7 represents a 3 dB loss.

- 7.4.4 Repeat the playback procedure in subparagraphs 7.4.2 and 7.4.3 for azimuth and equalization adjustments of an even-numbered tape track.
- 7.4.5 Repeat the procedure in subparagraph 7.4.3 for equalization only of other selected prime data tracks, as required.

8.0 Equipment Required for Swept-Frequency Procedures

Equipment required at the recording site consists of a sweep-frequency oscillator having a constant amplitude sweep range of approximately 400 Hz through 4.4 MHz with frequency markers at 62.5, 125, 250, and 500 kHz and 1.0, 2.0, and 4.0 MHz. The sweep range to 4.4 MHz may be used for all tape speeds because the bandwidth of the recorder and reproducer will attenuate those signal frequencies beyond its range. The sweep rate should be approximately 25 Hz. Care should be exercised in the installation of the sweep generator to ensure a flat response of the sweep signal at the input terminals of the recorder. Appropriate line-driver amplifiers may be required for long cable runs or the low impedance of paralleled inputs.

- 8.1 A stepped-frequency oscillator could be substituted for the sweep-frequency generator at the recording location. Recommended oscillator wavelengths at the mission tape speed are 7.62 mm (300 mils), 3.81 mm (150 mils), 0.254 mm (10 mils), 0.0254 mm (1 mil), 0.0127 mm (0.5 mil), 0.0064 mm (0.25 mil), 0.0032 mm (0.125 mil), 0.0025 mm (0.1 mil), 0.0020 mm (0.08 mil), and 0.0015 mm (0.06 mil).
- 8.2 Equipment required at the playback site consists of an ordinary oscilloscope having a flat frequency response from 400 Hz through 4.4 MHz.

9.0 Fixed-Frequency Plus White Noise Procedure

The signature used in this method is the same for all applications. For direct recording of subcarrier multiplexes, only static nonlinearity (nonlinearity which is independent of frequency) is important for crosstalk control. Subparagraph 6.8.2 in chapter 6 provides a reference level for static nonlinearity. All formats of data recording are sensitive to SNR. Predetection recording and HDDR are sensitive to equalization. The following signature procedure satisfies all the above requirements.

- 9.1 Record a sine-wave frequency of 0.1 UBE (see table 6-3) with the following amplitudes.
- 9.1.1 Equal to the standard record level for direct recording of subcarrier multiplexes and HDDR (see subparagraph 6.8.2, chapter 6).
- 9.1.2 Equal to the carrier amplitude to be recorded for pre-detection recording of PCM/FM, PCM/PM, FM/FM, and PAM/FM.
- 9.2 Record flat band-limited white noise of amplitude 0.7 of the true rms value of the 0 dB standard record level as described in subparagraph 6.8.2, chapter 6. Noise must be limited by a low-pass filter just above the UBE.
- 9.3 Record with zero input (input terminated in 75 ohms). The three record steps previously described can consist of 10 seconds each. The spectra can be obtained with three manually initiated sweeps of less than a second each, because no great frequency resolution is required. All of the spectrum analyzer parameters can be standardized and set in prior to running the mission tape.

10.0 Signature Playback and Analysis

Before analyzing the signature, the reproducer azimuth should be adjusted. With the short signature, it is probably more convenient to use the data part of the recording for this purpose. If predetection recording is used, the azimuth can be adjusted to maximize the output as observed on the spectrum analyzer or on a voltmeter connected to the output. If baseband recording is used, the azimuth can be adjusted to maximize the spectrum at the upper end of the band. Using a spectrum analyzer, reproduce, store, and photograph the spectra obtained from paragraphs 9.1, 9.2, and 9.3 in this appendix. Store and photograph the spectrum analyzer input level of zero.

- 10.1 It is evident that any maladjustment of the recorder and reproducer or magnetization of the heads will result in the decrease of SNR across the band and will be seen from the stored spectra or photograph.
- 10.2 By having a photograph of the spectra, amplitude equalization can be accomplished without shuttling the mission tape as follows.
- 10.2.1 Use an auxiliary tape (not the mission tape, but preferably the same type tape). With a white-noise input signal band limited, adjust the amplitude equalization of the recorder and reproducer at the tape dubbing or data reduction site and photograph the output spectrum (see paragraph 9.0 of this appendix).
- 10.2.2 Compare this photo with the photo made from the signature. Note the difference at several points across the band.
- 10.2.3 Using the auxiliary tape, adjust the amplitude equalization to compensate for the differences noted.
- 10.2.4 Recheck with the mission tape to verify that the desired amplitude equalization has been achieved.
- 10.3 If the phase equalization is to be checked, a square wave signal can be added to the signature in accordance with the manufacturer's specification (see subparagraph 4.9.2.3.3 of volume III, RCC document 118). The same procedure as that recommended for amplitude equalization can be used, except based on oscillograms.

11.0 Recording and Playback Alignment Procedures

When using standard preamble (or postamble), see paragraph 6.12, chapter 6.

11.1 Recording of Preamble for Direct Electronics Alignment.

- 11.1.1 Patch a square wave generator output set to 1/11 band edge to all tracks having direct electronics or initiate procedure for recording internally generated 1/11 band edge square wave according to manufacturer's instructions.
- 11.1.2 If the preamble will be used for a manual adjustment, record for a minimum of 30 seconds at the standard record level and tape speed to be used for data recording.
- 11.1.3 If the preamble will be used only for automatic alignment, record at the standard record level and tape speed to be used for data recording for a sufficient time as specified by the manufacturer of the playback recorder reproducer or as agreed by the interchange parties.

11.2 Playback of Preamble for Direct Electronics Alignment.

For systems so equipped, initiate automatic alignment procedure per manufacturer's instructions. The procedure for manual adjustment is described in the following subparagraphs.

- 11.2.1 Display fundamental and odd harmonics of the square wave (third through eleventh) of selected odd numbered direct track near center of head stack on the spectrum analyzer. Adjust azimuth by peaking output amplitude of the third through eleventh harmonic. Final adjustment should peak the eleventh harmonic.
- 11.2.2 Repeat the above subparagraph for even numbered direct track. (Only one track is necessary for double density, 14-track, in-line system).
- 11.2.3 Observe frequency response across the band pass on selected track and correct if necessary. For a flat response, the third harmonic will be 1/3 of the amplitude of the fundamental, fifth harmonic 1/5 the amplitude, and so on. A convenient method is to compare the recorder/reproducer output with that of a square wave generator patched directly to the spectrum analyzer.



An alternate but less accurate method is to optimize the square wave as displayed on an oscilloscope rather than a spectrum analyzer.

- 11.2.4 Repeat the previous subparagraph for each direct track.
- 11.2.5 Display square wave on oscilloscope. Adjust phase for best square wave response as shown in figure D-7.
- 11.2.6 Repeat the previous subparagraph for each direct track.

11.3 Recording of Preamble for FM Electronics Alignment.

If available, initiate procedure for recording internally generated 1/11 band edge square wave and ± 1.414 Vdc per manufacturer's instructions. Otherwise, patch a square wave generator output to all tracks having FM electronics. A near dc signal may be obtained by setting the square wave generator to 0.05 Hz and ± 1.414 V or by using a separate dc source.

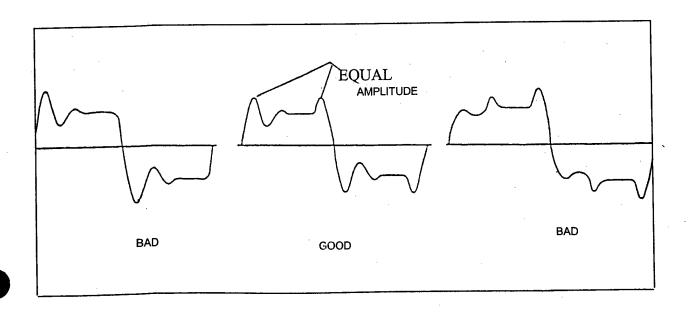


Figure D-7. Square wave responses.

11.3.1 If the preamble will be used for manual alignment, record at least one cycle of the 0.05 Hz square wave at ± 1.414 V or a positive and negative 1.414 Vdc for a minimum of 10 seconds each at the tape speed to be used for data recording. Next, record a 1/11 band edge square wave for a minimum of 20 seconds.

11.3.2 If the preamble will be used only for automatic alignment, record the above sequence for a sufficient time as specified by the manufacturer of the playback recorder/reproducer or as agreed by the interchange parties.

11.4 Playback of Preamble for FM Electronics Alignment.

For systems so equipped, initiate automatic alignment procedure per manufacturer's instructions. The procedure for manual adjustment is described in the next subparagraphs.

11.4.1 Check and adjust for 0 V output at center frequency per RCC document 118, Test Methods for Telemetry Systems and Subsystems, volume III, Test Methods for Recorder/Reproducer Systems and Magnetic Tape.

- 11.4.2 Use dc voltmeter to verify a full positive and negative output voltage on the selected track and correct if necessary.
- 11.4.3 Display fundamental and odd harmonics of the square wave (third through eleventh) on the spectrum analyzer.
- 11.4.4 Observe frequency response per subparagraph 11.2.3.
- 11.4.5 Repeat subparagraphs 11.4.1 through 11.4.3 for each FM track.

APPENDIX E

AVAILABLE TRANSDUCER DOCUMENTATION

(This Appendix Has Been Intentionally Deleted)



APPENDIX F

CONTINUOUSLY VARIABLE SLOPE DELTA MODULATION

APPENDIX F

CONTINUOUSLY VARIABLE SLOPE DELTA MODULATION

1.0 General

The Continuously Variable Slope Delta (CVSD) modulation is a nonlinear, sampled data, feedback system which accepts a band-limited analog signal and encodes it into binary form for transmission through a digital channel. At the receiver, the binary signal is decoded into a close approximation of the original analog signal. A typical CVSD converter consisting of an encoder and decoder is shown in figures F-1a and b.

2.0 General Descriptions

A general description of the delta modulation and the CVSD converter can be found in the succeeding subparagraphs.

- 2.1 <u>Delta Modulation</u>. Delta modulation is an A-D conversion technique resulting in a form of digital pulse modulation. A delta modulator periodically samples the amplitude of a band-limited analog signal, and the amplitude differences of two adjacent samples are coded into n-bit code words. This nonlinear, sampled-data, feedback system then transmits the encoded bit stream through a digital channel. At the receiving end, an integrating network converts the delta-modulated bit stream through a decoding process into a close approximation of the original analog signal.
- 2.2 CVSD Converter. A typical CVSD converter consists of an encoder and a decoder (see figures F-1a and b). The analog input signal of the CVSD encoder is band-limited by the input band, pass filter. The CVSD encoder compares the band-limited analog input signal with an analog feedback approximation signal generated at the reconstruction integrator output. The digital output signal of the encoder is the output of the first register in the "run-of-three" counter. The digital output signal is transmitted at the clock (sample) rate and will equal "1" if the analog input signal is greater than or equal to the analog feedback signal at the instant of sampling. For this value of the digital output signal, the pulse amplitude modulator (PAM) applies a positive feedback pulse to the reconstruction integrator; otherwise, a negative pulse is applied. This function is accomplished by the polarity control signal, which is equal to the digital encoder output signal. The amplitude of the feedback pulse is derived by means of a 3-bit shift register, logic sensing for overload, and a syllabic lowpass filter. When a string of three consecutive ONES or ZEROS appears at the digital output, a discrete voltage level is applied to the syllabic filter, and the positive feedback pulse amplitude increases until the overload string is broken. In such an event, ground potential is fed to the filter by the overload algorithm, forcing a decrease in the amplitude of the slope voltage out of the syllabic filter. The encoder and decoder have identical characteristics

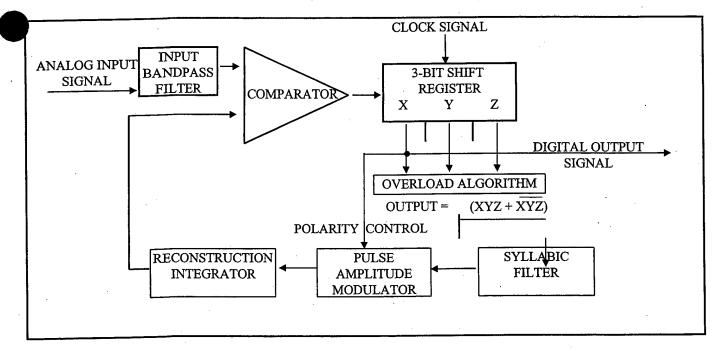


Figure F-1a. Typical CVSD encoder.

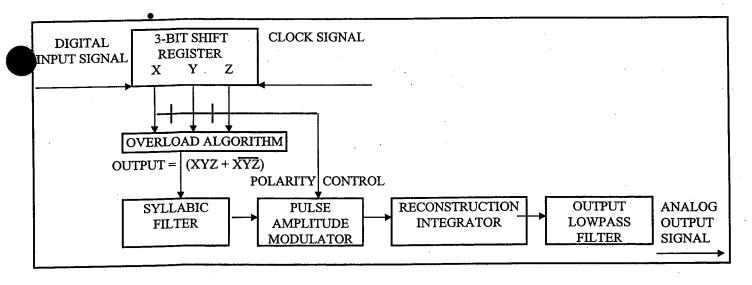


Figure F-1b. Typical CVSD decoder.

except for the comparator and filter functions. The CVSD decoder consists of the input band pass filter, shift register, overload algorithm, syllabic filter, PAM and reconstruction integrator used in the encoder, and an output low-pass filter. The decoder performs the inverse function of the encoder and regenerates speech by passing the analog output signal of the reconstruction integrator through the low-pass filter. Other characteristics optimize the CVSD modulation technique for voice signals. These characteristics include:

- a. Changes in the slope of the analog input signal determine the step-size changes of the digital output signal.
- b. The feedback loop is adaptive to the extent that the loop provides continuous or smoothly incremental changes in step size.
- c. Companding is performed at a syllabic rate to extend the dynamic range of the analog input signal.
- d. The reconstruction integrator is of the exponential (leaky) type to reduce the effects of digital errors.

3.0 Detailed Descriptions

The characteristics described in subparagraphs 3.1 through 3.9 are in addition to those specified in paragraph 5.0 of this standard and are for guidance only.

- 3.1 <u>Input Band Pass Filter</u>. The input filter provides band-limiting and is typically a second- or higher-order filter (see figure F-1a).
- 3.2 <u>Comparator</u>. The comparator compares the band-limited analog input signal from the filter with the output signal of the reconstruction integrator (see figure F-1a). This comparison produces the digital error signal input to the 3-bit shift register. The transfer characteristic of the comparator is such that the difference between the two input signals causes the output signal to be driven to saturation in the direction of the sign of the difference.
- 3.3 3-Bit Shift Register. The 3-bit shift register acts as a sampler which clocks the digital error signal from the comparator at the specified data signaling rate and stores the current samples and two previous samples of the error signal (see figures F-1a and b). The digital output signal is a binary signal having the same polarity as the input signal from the comparator at the time of the clock signal. The digital output signal is also the digital output of the encoder and is referred to as the baseband signal. Further processing for transmission such as conditioned diphase modulation may be applied to the baseband signal. It is necessary that the inverse of any such processing be accomplished and the baseband signal restored before the CVSD decoding process is attempted.
- 3.4 Overload Algorithm. The overload algorithm operates on the output of the 3-bit shift register (X, Y, Z) using the run-of-threes coincidence algorithm so that the algorithm output equals $(XYZ + \overline{XYZ})$ (see figures F-1a and b). The output signal is a binary signal at the clock signaling rate and is true for one clock period following the detection of three like bits and false at all other times.

- 3.5 <u>Syllabic Filter</u>. The syllabic filter acts as a low-pass filter for the output signal from the overload algorithm (see figures F-1a and b). The slope-voltage output of the syllabic filter is the modulating input to the PAM. The step-function response of the syllabic filter is related to the syllabic rate of speech, is independent of the sampling rate, and is exponential in nature. When the overload algorithm output is true, a charging curve is applicable. When this output is false, a discharging curve is applicable.
- 3.6 <u>Pulse Amplitude Modulator (PAM)</u>. The PAM operates with two input signals: the output signal from the syllabic filter, and the digital signal from the 3-bit shift register (see figures F-1a and b). The syllabic filter output signal determines the amplitude of the PAM output signal and the signal from the 3-bit shift register is the polarity control that determines the direction, plus or minus, of the PAM output signal. The phrase "continuously variable" in CVSD is derived from the way the PAM output signal varies almost continuously.
- 3.7 <u>Reconstruction Integrator</u>. The reconstruction integrator operates on the output signal of the PAM to produce an analog feedback signal to the comparator (or an output signal to the output low-pass filter in the receiver) that is an approximation of the analog input signal (see figures F-1a and b).
- 3.8 Output Low-Pass Filter. The output filter is a low-pass filter having a frequency response that typically has an asymptotic rolloff with a minimum slope of 40 dB per octave, and a stopband rejection that is 45 dB or greater (see figure F-1b). The same output filter characteristic is used for encoder digital output signals of either 16 or 32 kbps.
- 3.9 Typical CVSD Decoder Output Envelope Characteristics. For a resistance/ capacitance circuit in the syllabic filter with time constants of 5 ms for both charging and discharging, the envelope characteristics of the signal at the decoder output are shown in figure F-2. For the case of switching the signal at the decoder input from the 0-percent run-of-threes digital pattern to the 30-percent run-of-threes digital pattern, the characteristic of the decoder output signal follows the resistance/ capacitance charge curve. Note that the number of time constants required to reach the 90-percent charge point is 2.3, which gives a nominal charge time of 11.5 ms.

When switching the other way (from the 30-percent pattern to the 0-percent pattern), the amplitude at the beginning of discharging is, at the first moment of switching, higher (by a factor of 16) than the final value which is reached asymptotically. The final value equals -24 dBm0, that is, 0.03. Therefore, the amplitude at the beginning of discharging is 0.48 (percent run-of-threes = 0). Note that the number of time constants required to reach the 10-percent point on the discharge curve is 1.57, which gives a nominal discharge time of 7.8 ms.

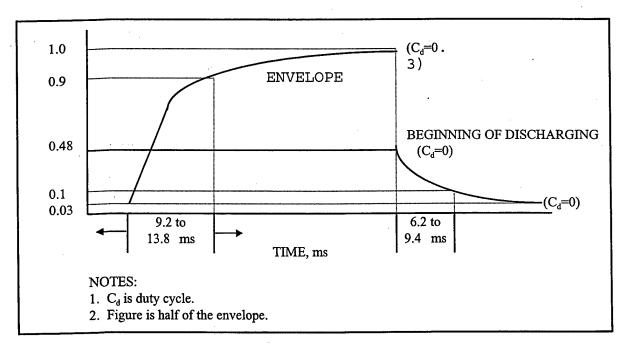


Figure F-2. Typical envelope characteristics of the decoder output signal for CVSD.

4.0 Reference Level

The decoder analog output level with the 16 and 32 kbps, 30-percent run-of-threes reference digital pattern applied to the decoder input shall be the reference level for the CVSD requirements of this standard, and shall be designated 0 dBm0 (see subparagraph 5.9.1).

5.0 CVSD Characteristics

The characteristics of CVSD are described in the following subparagraphs.

- 5.1 <u>Input and Output Impedances</u>. The analog input and output impedances for CVSD converters are not standardized. These impedances depend upon the application of the converters.
- 5.2 <u>Data Signaling Rates</u>. The CVSD converter shall be capable of operating at 16 and 32 kbps.
- 5.3 <u>Input and Output Filters</u>. The analog input shall be band pass filtered. The analog output shall be low pass filtered.



Details of input and output filers, consistent with the CVSD performance requirements of this standard, will be determined in applicable equipment specifications based on validated requirements.

- 5.4 Overload Algorithm. A 3-bit shift register shall be used for the CVSD encoder and decoder (see figures F-1a and b). The overload logic shall operate on the output of this shift register using the run-of-threes coincidence algorithm. The algorithm output signal shall be a binary signal at the data-signaling rate. This signal shall be true for one clock period following the detection of three like bits (all ZEROS or all ONES) and false at all other times.
- 5.5 <u>Compression Ratio.</u> The compression ratio shall be nominally 16:1 with a maximum of 21:1 and a minimum of 12:1. The maximum slope voltage shall be measured at the output of the syllabic filter for a 30-percent run-of-threes digital pattern. The minimum slope voltage shall be measured at the output of the syllabic filter for a 0-percent run-of-threes digital pattern.
- 5.6 Syllabic Filter. The syllabic filter shall have a time constant of $5 \text{ ms } \pm 1$. The step function response of the syllabic filter shall be exponential in nature. When the output of the overload algorithm is true, a charge curve shall be applicable. When the output of the overload algorithm is false, a discharge curve shall be applicable.
- 5.7 Reconstruction Integrator Time Constant. The reconstruction integrator shall have a time constant of 1 ms ± 0.25 .
- 5.8 <u>Analog-to-Digital Conversion</u>. An 800-Hz ± 10 signal at a 0 dBm0 level applied to the input of the encoder shall give a duty cycle (C_d) of 0.30 at the algorithm output of the encoder shown in figure F-la.
- 5.9 <u>Digital-to-Analog Conversion</u>. The characteristics of a digital-to-analog conversion are described in the following subparagraphs.
- 5.9.1 Relation of Output to Input. With the applicable reference digital patterns of table F-1 applied to the digital input of the decoder as shown in figure F-3, the analog output signal shall be 800 Hz ±10 at the levels shown in table F-1, measured at the decoder output. These digital patterns, shown in hexadecimal form, shall be repeating sequences.
- 5.9.2 <u>Conversion Speed</u>. When the decoder input is switched from the 0-percent run-of-threes digital pattern to the 30-percent run-of-threes digital pattern, the decoder output shall reach 90 percent of its final value within 9 to 14 ms. When the decoder input is switched from the 30-percent run-of-threes digital pattern to the 0-percent run-of-threes digital pattern, the decoder output shall reach 10 percent of the 30-percent run-of-threes value within 6 to 9 ms. These values shall apply to both the 16 and 32-kbps data signaling rates.
- 5.10 <u>CVSD Converter Performance</u>. The characteristics specified in subparagraphs 5.10.1 through 5.10.7 apply to one CVSD conversion process obtained by connecting the output of an encoder to the input of a decoder (see figure F-3).

NOTE

Test signal frequencies which are submultiples of the data signaling rate shall be avoided by offsetting the nominal test frequency slightly; for example, an 800-Hz test frequency could be offset to 804 Hz. This test

frequency offset will avoid nonlinear distortion which can cause measurement difficulties when tandeming CVSD with PCM.

TABLE F-1. DECODER REFERENCE DIGITAL PATTERNS FOR CVSD				
Data Signaling Rate, kpbs	Digital Pattern	Run-of-threes, Percent	Output, dBm0	
16	DB492	0	-24±1	
32	DB54924AB6	0	-24±1	
16	FB412	. 30	0±1	
32	FDAA10255E	30	0±1	

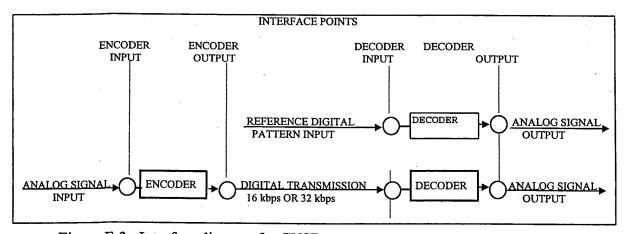


Figure F-3. Interface diagram for CVSD converter.

- 5.10.1 Companding Speed. When an 800-Hz ± 10 sine wave signal at the encoder input is switched from -24 dBm0 to 0 dBm0, the decoder output signal shall reach 90 percent of its final value within 9 to 14 ms.
- 5.10.2 <u>Insertion Loss</u>. The insertion loss between the encoder input and the decoder output shall be $0 \text{ dB} \pm 2 \text{ dB}$ with an $800 \text{ Hz} \pm 10$, 0 dBm0 input to the encoder.
- 5.10.3 <u>Insertion Loss Versus Frequency Characteristics</u>. The insertion loss between the encoder input and decoder output, relative to $800 \text{ Hz} \pm 10$ measured with an input level of -15 dBm0 applied to the converter input, shall not exceed the limits indicated in table F-2 and shown in figures F-4a and b.

TABLE F-2. INSERTION LOSS LIMITS FOR CVSD		
Rate, kpbs	Frequency (f), Hz	Insertion Loss, dB (Referenced to 800 Hz)
16	f < 300	≥-1.5
	$300 \le f \ge 1000$	-1.5 to 1.5
	$1000 \le f \ge 2600$	-5 to 1.5
	$2600 \le f \ge 4200$	≥ -5
	4200 ≤ f	≥ 25
32	f < 300	≥-1
	$300 \le f \ge 1400$	-1 to 1
	$1400 \le f \ge 2600$	3 to 1
	$2600 \le f \ge 3400$	3 to 2
,	$3400 \le f \ge 4200$	≥ -3
· .	4200 ≤ f	≥ 25

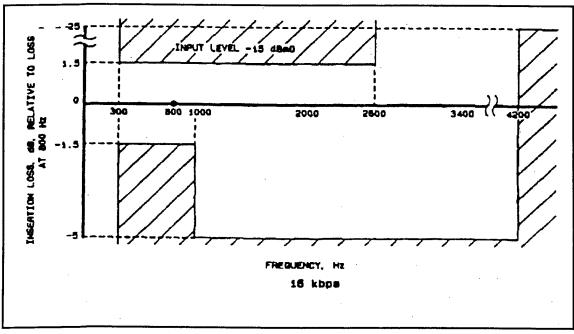


Figure F-4a. Insertion loss versus frequency for CVSD (16 kbps).

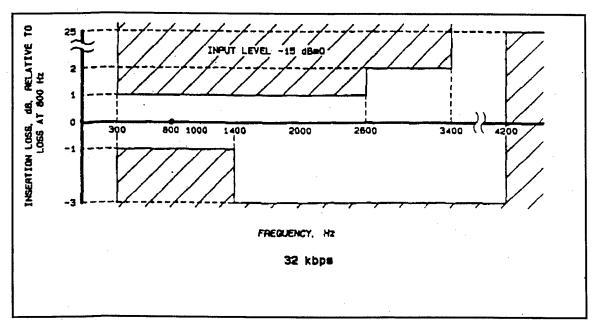


Figure F-4b. Insertion loss versus frequency for CVSD (32 kbps).

- 5.10.4 <u>Variation of Gain With Input Level</u>. The variation in output level, relative to the value at -15 dBm0 input, shall be within the limits of figure F-5a and b for an input frequency of $800 \text{ Hz} \pm 10$.
- 5.10.5 <u>Idle Channel Noise</u>. The idle channel noise shall not exceed the limits shown in table F-3 when measured at the CVSD decoder output.
- 5.10.6 <u>Variation of Quantizing Noise With Input Level</u>. The minimum signal to quantizing noise ratio over the input signal level range shall be above the limits of figure F-6a and b. The noise ratio shall be measured with flat weighting (unweighted) at the decoder output with a nominal 800-Hz ± 10 sine wave test signal at the encoder input.
- 5.10.7 <u>Variation of Quantizing Noise With Frequency</u>. The minimum signal to quantizing noise ratio over the input frequency range shall be above the limits of figure F-7a and b. The noise ratio shall be measured with flat weighting (unweighted) at the decoder output with a sine wave test signal of -15 dBm0.

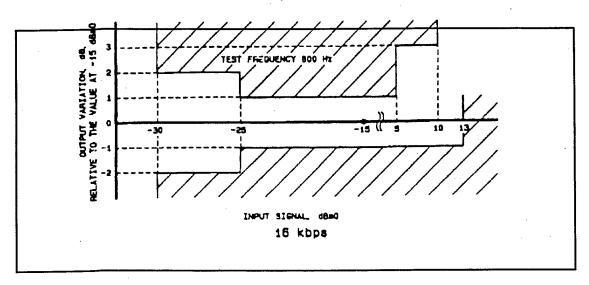


Figure F-5a. Variation of gain with input level for CVSD (16 kbps).

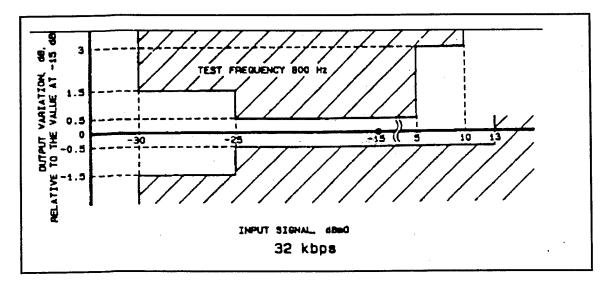


Figure F-5b. Variation of gain with input level for CVSD (32 kbps).

TABLE F-3. IDLE CHANNEL NOISE LIMITS FOR CVSD		
Data Signaling Rate, kbps Idle Channel Noise, dBm0		
16	-40	
32	-50	

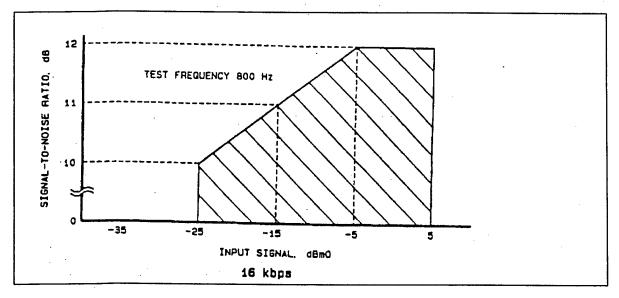


Figure F-6a. Signal to quantizing noise ratio versus input level for CVSD (16 kbps).

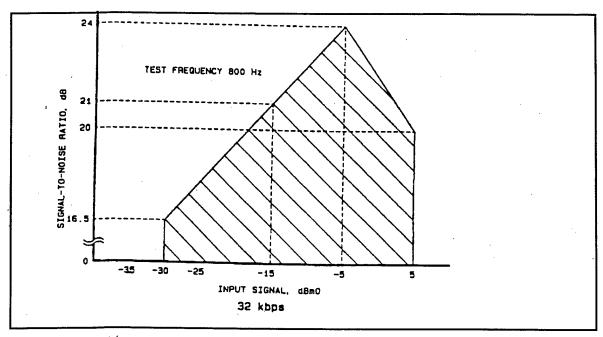


Figure F-6b. Signal to quantizing noise ratio versus input level for CVSD (32 kbps).

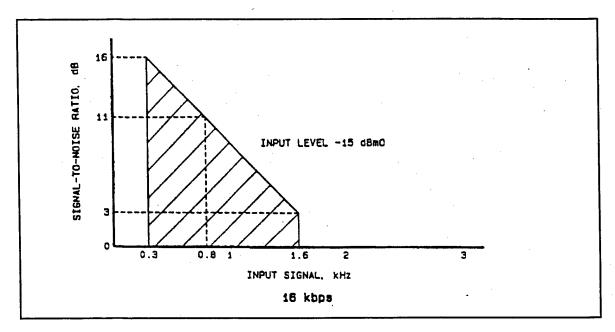


Figure F-7a. Signal to quantizing noise ratio versus frequency for CVSD (16 kbps).

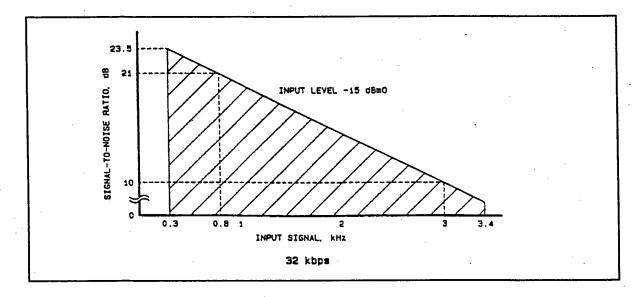


Figure F-7b. Signal to quantizing noise ratio versus frequency for CVSD (32 kbps).

APPENDIX G

ADARIO DATA BLOCK FIELD DEFINITIONS

APPENDIX G

ADARIO DATA BLOCK FIELD DEFINITIONS

The details of the ADARIO data block format are provided in figure G-1 and in the ADARIO data format field summary. As shown in figure G-1, the eight session header words are the first eight words of the block. The channel packet for the highest priority (priority 1) channel is next, followed by the next lower priority channel packet (priority 2). Following the lowest priority channel, fill data consisting of all ones are inserted as required to complete the 2048-word data block.

Within the channel packet, the first five words are the channel header words including the partial word (PW). Following the channel header is the variable size channel data field. The channel data are organized in a last-in-first-out (LIFO) fashion. The first samples acquired in the block time interval appear in the last data word of the channel packet. The sample data are formatted into the 24-bit data word such that the first sample occupies the MSBs of the word. The next sample is formatted into the next available MSBs and so on until the word is full. As an example, data formatted into 8-bit samples is shown in figure G-2.

In cases where the 24-bit data word is not a multiple of the sample size, the sample boundaries do not align with the data words. In these cases, the samples at the word boundaries are divided into two words. The MSBs of the sample appear in LSBs of the first buffered word and the LSBs of the sample appear in the MSBs of the next buffered word. Since the channel data appears in a LIFO fashion in the ADARIO data block, the MSBs of the divided sample will occur in the data word following the word containing LSBs of the sample. Figure G-3 depicts ADARIO timings.

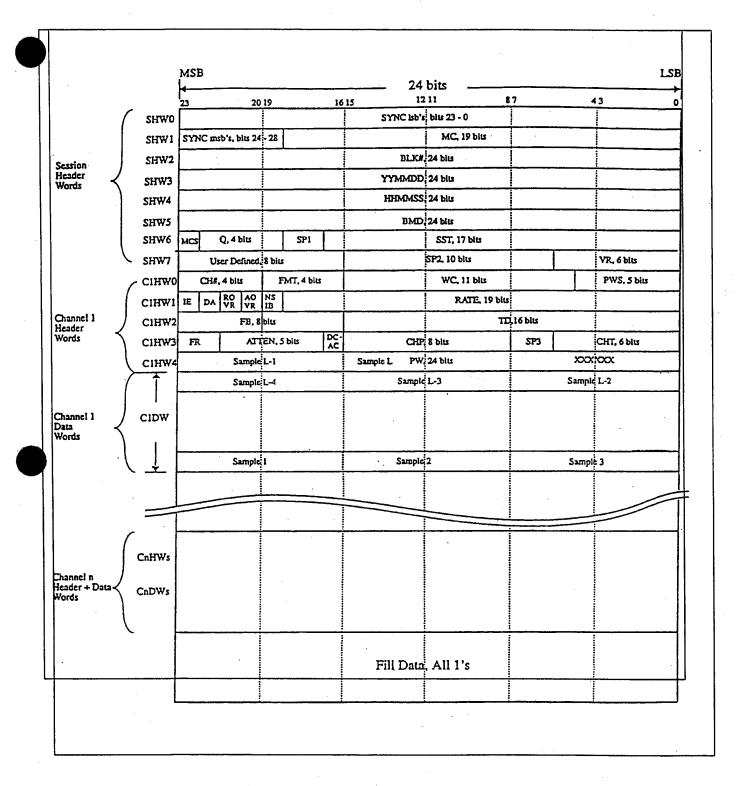


Figure G-1. ADARIO data format.

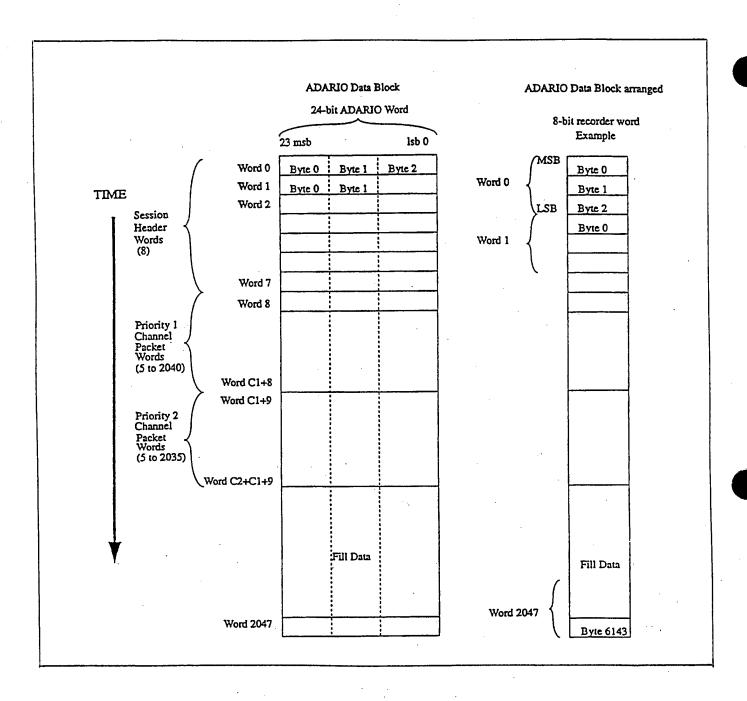


Figure G-2. ADARIO data blocks.

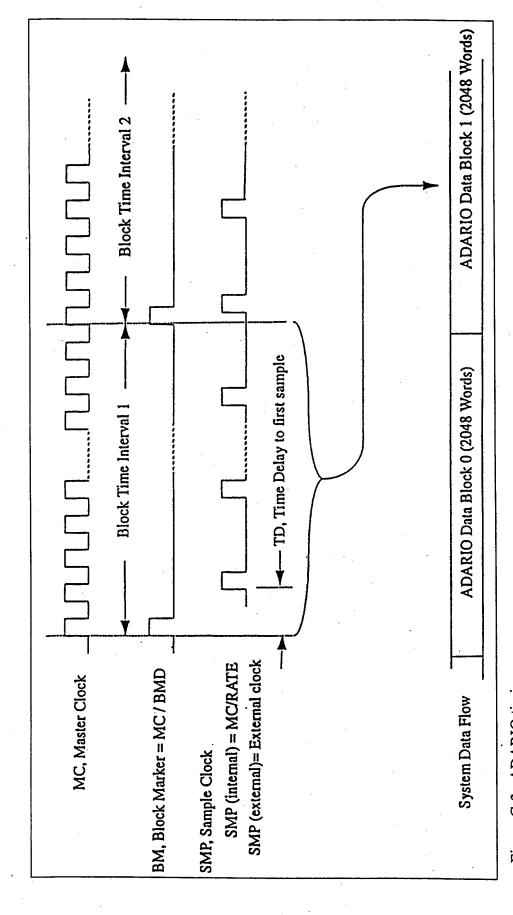


Figure G-3. ADARIO timing

ADARIO Data Format Field Definitions Summary

- 1. Block Length (2048 words, 24-bit words, fixed length)
- 2. Session Header (8 words, fixed format)

SHWO	(bits 23 to 0)	SYNC Field, bits 0-23 of the 29-bit block sync. The LSBs of the block sync are 36E19C and are contained here.
SHW1	(bits 23 to 19)	SYNC Field, bits 24-28 of the 29-bit block sync. The MSBs of the block sync are 01001 and are contained here. The 29-bit block sync is fixed for all ADARIO configurations and chosen for minimal data cross correlation.
	(bits 18 to 0)	MC, Master Clock, a 19-bit binary value in units of 250 Hz. MC is the clock frequency used to derive session and per channel parameters.
SHW2	(bits 23 to 0)	BLK#, ADARIO Data Block Number, a 24-bit binary value. BLK# is to zero at the start of each session and counts up consecutively. Rollover is allowed.
SHW3	(bits 23 to 0)	YYMMDD, Time Code Field, a BCD representation of the year (YY), month (MM), and day (DD). YYMMDD Time Code Field is updated during the record process once per second.
SHW4	(bits 23 to 0)	HHMMSS, Time Code Field, a BCD representation of the hour (HH), minute (MM), and second (SS). The HHMMSS Time Code Field is updated during the record process once per second.
SHW5	(bits 23 to 0)	BMD, Block Marker Divisor, a 24-bit binary value. BMD is established so that the block marker frequency, BM, may be derived from MC by BM = MC/BMD

SHW6 (bit 23)

MCS, Master Clock Source, a 1-bit flag.

1 = MC was generated internally.

0 = MC was provided from an external source.

(bits 22 to 19)

Q, Number of active channels minus one, a 4-bit binary value. For example, 0 indicates that one channel is active.

(bits 17 to 18)

SP1, Spare field 1, a 2-bit field. It is set to zero.

(bits 16 to 0)

SST, Session Start Time, a 17-bit binary value in units of seconds. The integer number of seconds represents the session start time of day in seconds, where midnight starts with zero.

SHW7 (bits 23 to 16)

User Defined, an 8-bit field. May be input by the user at any time during a recording session. The interpretation of this bit field is left to the user.

(bits 15 to 6)

SP2, Spare field 2, a 10-bit field. It is set to zero.

(bits 5 to 0)

VR, Version number, a 6-bit binary value. Each update of the ADARIO format will be identified by a unique version number.

3. Channel 'n' Header

All channel headers contain five 24-bit ADARIO words with the following fixed format. The first logical channel, n=1, has the highest priority and its channel packet starts in the ninth word of the data block. Each active channel is represented by a channel packet that is present in the data block. The logical channel number, n, represents the relative priority of the channel and the order in which it appears in the data block.

CnHW0 (bits 23 to 20)

CH#, Physical Channel Number, a 4-bit binary value. 0 to 15 represents the physical location of the channel electronics in the ADARIO hardware. The user sees those locations labeled from 1 to 16.

(bits 19 to 16)

FMT, Format code for the channel data word, a 4-bit binary value. The format code is used to define the size of the user data word by means of the following table:

15=24 bits	7=8 bits
14=22 bits	6=7 bits
13=20 bits	5=6 bits
12=18 bits	4=5 bits
11=16 bits	3=4 bits
10=14 bits	2=3 bits
9=12 bits	1=2 bits
8=10 bits	0=1 bit

(bits 15 to 5)

WC, Word Count, an 11-bit binary value. WC is the number of full channel data words that should be in the nth channel packet. WC may range from 0 to 2040. A WC greater than the number of actual words in channel packet indicates a data rate overflow, which would occur when a low-priority channel is not provided sufficient space in the fixed length data block as a result of an uncontrolled data rate in a higher priority channel.

(bits 4 to 0)

PWS, Partial Word Status, a 5-bit binary value. PWS is related to the number of samples in the partial word and may range from 0 to 23. PWS shall be computed as follows:

If the number of full samples in the partial word equals zero, then PWS = 0.

If the number of full samples in the partial word does not equal zero, then PWS = Round Up [Unused bits In PW/Channel Sample Size].

CnHW1 (bit 23)

IE, Channel Clock Source, a 1-bit flag.

1 = The channel clock was generated internally.

0 = The channel clock was provided from an external source.

(bit 22)

DA, Data type, a 1-bit flag.

1 = The channel is operated as a digital channel.

0 = The channel is operated as an analog channel.

(bit 21)

ROVR, Rate overrun in previous block, a 1-bit flag.

1 = The nth channel packet in the previous data block experienced an overrun.

0 = The nth channel packet in the previous data block did not experience an overrun.

(bit 20)

AOVR, Analog A/D Overrange in current block a 1-bit flag.

1 = The nth channel in the current data block experienced an analog-to-digital conversion overrange condition.

0 = The nth channel in the current data block did not experience an analog-to-digital conversion overrange condition.

(bit 19)

NSIB, No samples in current block, a 1-bit flag.

1 = TRUE, there are no samples for the nth channel in the current block.

0 = False, there are samples for the nth channel in the current block.



The definitions that are marked with an asterisk apply to analog channels and to particular hardware implementations of ADARIO. For the purposes of this standard these fields are not used.

(bits 18 to 0)

RATE, Channel sample rate indicator, 19-bit binary value. The interpretation of the rate value depends on the condition of IE, the channel clock source flag.

If IE = 1, then the value of rate is carried by the 16 LSBs of the rate field. Using rate, the frequency of the internal channel clock can be found by internal sample clock = (MC/RATE) -1.

IF IE = 0, then rate is a 19-bit binary value in units of 250 Hz which equals the frequency of the external channel clock as provided by the user at the time of the setup.

* CnWD2 (bits 23 to 16)

FB, Filter Bandwidth, an 8-bit binary value. The formula for the bandwidth, BW, of the antialiasing filter used in an analog channel incorporates FB as $BW = (FB/2) \times 10^{3+FR}$

(bits 15 to 0)

TD, Time Delay to first sample, a 16-bit binary value. TD is a measure of the time delay from the block marker, BM, to the first sample arriving at the nth channel during the current data block interval. TD is expressed as the number of master clock, MC, periods minus one.

* CnWD3 (bits 23 to 22)

FR, Filter Range, a 2-bit binary value. The formula for the bandwidth, BW, of the antialiasing filter used in an analog channel corporates FR as BW = (FB/2) $\times 10^{3+FR}$

(bits 21 to 17)

ATTEN, Attenuation, a 5-bit binary value. ATTEN represents the setting of the input attenuator (or gain) on the nth channel at the time that the record was formed 0=-15dB and 31=+16dB with intermediate settings expressed in one dB steps.

(bit 16)

DCAC, Analog signal coupling, a 1-bit flag.

- 1 = The channel is operated with dc coupling at the input.
- 0 = The channel is operated with ac coupling at the input.

(bits 15 to 8)

CHP, Channel Parameter field, an 8-bit field. The interpretation of the CHP field depends upon the card type with which it is associated, as defined by the CHT field. Each card type established by the CHT field, as part of its definition, shall specify the form and interpretation of the CHP field. To date,

four input card types have been established. The following CHP fields are defined as

For CHT=0

(bits 15 to 8)

remain undefined for the present analog single channel implementation except that the present hardware implementation expects an all zero field.

Would be subject to future definition as long as all the zero fill is set aside.

For CHT=1

(bits 15 to 8)

remain unused for the present digital single channel implementations except that the present hardware implementation expects an all zero field.

Would be subject to future definition as long as the all zero fill is set aside.

For CHT=2

(bits 15 to 8) remain unused for the present dual-purpose channel implementations except that the present hardware implementation expects an all zero field. Would be subject to future definition as long as the all zero fill is set aside.

For CHT=3

- (bits 15 to 12) establish the number of subchannels that are multiplexed into the multichannel data carried by the nth channel.
- (bits 11 to 8) identify the subchannel number of the first sample contained in the nth channel packet of the data block.
- (bits 7 to 6) SP3, Spare field 3, a 2-bit field. It is set to zero.
- (bits 5 to 0) CHT, Channel Type, a 6-bit field. Defines the type of channel through which input data was acquired. Additional channel types to be defined by future users and developers.
 - * CHT=0 Single channel analog input
 - * CHT=1 Single channel digital input
 - CHT=2 Single channel, dual-purpose, analog or digital input

- CHT=3 Multichannel analog input capable of multiplexing up to 16 analog inputs
- * CHT=4 Single channel digital input, dual channel analog input (stereo)
 "L" Channel on bits 15 to 8 of the sample word,
 "R" channel on bits 7 to 0 of the sample word
- * CHT=5 Single channel, triple-purpose, analog, digital, submux, formatted input

CnWD4 (bits 23 to 0)

PW, Partial Word, A 24-bit field. PW contains the last samples of the data block. The most significant bits of word contain the first sample, followed by the next sample in the next most significant bits. The number of samples in the PW is defined in the PWS field. The unused bits are not intentionally set and so contain random data.

Fill (bits 23 to 0)

Fill, Fill Words consisting of all ones binary, used for fixed rate aggregate. Fill words may be omitted when variable rate aggregate can be accommodated resulting in variable length blocks of up to 2048, 24-bit words.

SUBMUX DATA FORMAT FIELD DEFINITIONS

The details of the submux data format are shown in figures G-4a and b and defined in the Submux Data Format Field Definitions Summary. Figure G-5 shows a typical primary channel aggregate data content for fixed and variable rate channel. Submux data format is based on the sequential collection of the individual channel data blocks. Each channel data block is the sequential collection of presented input samples in a fixed period of time. This sequential collection results in a variable length, fixed rate, and channel data blocks. To accommodate fixed rate channels, fill is also defined. The aggregate data stream is composed of a block sync timing channel, followed by sequential channel data blocks, if enabled, followed by fill, if required, at fixed block rate.

The channel data blocks are the sequential collection of input samples bit packed into sequential 16-bit words over the block period of time. The data block is preceded by a three-word header that identifies the source (channel ID) of data, channel type of processing, packing format in the data block, bit count length of the valid data, and the time delay between the first sample and the block period. If data were internally sampled, the sample period is defined with the first sample being coincident with the start of block period. Channel type is used to define specific types of channels that provide timing, annotation, and synchronization functions that may be required by the specific primary channel or may be redundant and not required. Specific implementation of the required channels may provide only the required channels with specific implementation constraints that limit the aggregate rate or the range of any specific field.

The submux format is based on a 16-MHz clock defining all timing. The derived clock is the 16-MHz clock divided in binary steps as defined by 2^{BRC} that defines all timing and internal sampling. Block period is 20 160 derived clock periods which limits the submux aggregate to 256 Mbps, limits the maximum block rate to 793.65 blocks per second, and in conjunction with a 16-bit bit count field, limits the subchannel maximum data rate to 52 Mbps.

SUBMUX DATA FORMAT FIELD DEFINITIONS SUMMARY

1. Frame length	Variable or fixed with fill.	Minimum is 3-word block sync plus
	one channel block, maxim	um is 20 160x16-bit words.

- 2. Block length Variable from 3x16-bit words to 4099x16-bit words per channel data block. Specified by CHT>0 and integer of (Bit_Count+15/16). May be limited by implementation.
- 3. Block Sync Defined by Channel ID = 31, 3-word block, 2-word sync. Defines a period of 20 160 derived clocks.
- 4. General Form All Channel data blocks contain this information in the 3-word header.
 - HW1 (bits 15 to 11) CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel of any type. CHN ID = 31 reserved for Block Sync.
 - (bits 10 to 8) CHT, Channel Type, from 0 to 7 defines type of processing performed on the data and the format of header word fields.

CHT =	1 2 3 4 5	Timing channel, block sync or time tag, 3-word only Annotation text or block count, variable length Digital serial external or internal clock, variable Digital parallel external clock, variable Analog wide band, variable Analog stereo, variable TBD (to be defined by future implementation) TBD
*7 ' 1	1 1 1	
Variab HW1	le length (bits 15 to 11)	General form with variable data block length
11 44 1	(0168 13 10 11)	CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel of any type.
	(bits 10 to 8)	CHT, Channel Type, from 1 to 7 defines type of
	· ·	processing performed on the data and the format of header word fields.
	(bits 7 to 4)	FMT, Format, defines the number of bits minus one in each sample. Data block sample size (bits) = (FMT+1). Range 0 to 15, binary format.
	(bits 3 to 0)	ST1 to ST4, status bits, define dynamic conditions within
		this block period such as over range.
HW2	(bits 15 to 0)	Bit_Count defines the number of valid data bits in the data block starting with the most significant bit of the first data word DW1. Variable word length of the data block is the Integer of ((Bit_Count + 15)/16). Range 0 to 65535, binary format.
HW3	(bit 15)	I/E, Internal / External clock
	(bits 15 to 0)	Depends on CHT field, defines block count, time delay, or sample period.
Block Sy	nc	Defines the start of channel data blocks and start of block period that lasts for 20 160 derived clocks.
HW1	(bits 15 to 0)	SYNC $1 = F8C7$ hex, defines the first sync word.
HW2	(bits 15 to 0)	SYNC $2 = BF1E$ hex, defines the second sync word.
HW3	(bits 15 to 13)	BRC, Block Rate Clock, defines the binary divisor for the
		16 MHz system clock. Derived CLK = 16 MHz / 2 ^{BRC} MHz. Block rate = Derived CLK / 20160 Hz. Period = 1 / Derived CLK.
	(bit 12)	FILL, indicates if the primary channel requires fill for constant rate.
	(bits 11 to 4)	TBD

5.

	(bit 3) (bit 2) (bits 1 to 0)	AOE, Aggregate Overrun Error if set indicates that the aggregate of the enabled channels exceeds the submux aggregate (data truncated to 20 160 words between sync). PCRE, Primary Channel Rate Error if set indicates that primary channel is unable to maintain the aggregate rate of the submux. Excess blocks are truncated. ST3, ST4, Status reserved.
	(6118 1 10 0)	S15, S14, Status leserved.
6. Time Tag	g Define	es the time tag channel for time stamping the frame.
HW1	(bits 15 to 11)	CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel.
	(bits 10 to 8)	CHT = 0, Channel Type = 0, Time Tag IRIG Time code processing and 3-word format.
HW	(bits 7 to 0)	DAYS, Most significant 8 bits of Time Code Days field. BCD format.
	(bits 15 to 14)	DAYS, Least significant 2 bits of Time Code Days field. BCD format.
	(bits 13 to 8)	HOURS, Time Code Hours 6 bit field. BCD format.
HW	(bits 7 to 0) (bits 15 to 8)	MINUTES, Time Code Minutes 7 bit field. BCD format. SECONDS, Time Code Seconds 7 bit field. BCD format.
	(bits 7 to 0)	FRACTIONAL SECONDS, Time Code Fractional Seconds 8 bit field. BCD format.
5	D.C.	1.1 1
7. Annotati Text		es block count and annotation text that pertains subchannels at this time.
HW1	(bits 15 to 11)	CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel.
	(bits 10 to 8)	CHT = 1, Channel Type = 1, Block Count and Annotation Text if any.
	(bits 7 to 4)	FMT = 7, Format = 7, defines 8 bit ASCII character in text.
	(bit 3)	NC, No Characters (Bit_Count = 0) Block count only.
	(bits 2 to 0)	OVR, PE, OE, Overrun Parity and async framing error.
HW	(bits 15 to 0)	Bit_Count defines the number of valid data bits in the data block starting with the MSB of the first data word DW1. Variable word length of the data block is the Integer of ((Bit_Count + 15)/16). Range 0 to 65 535, binary format.
HW	(bits 15 to 0)	Block_Count sequential block numbering with rollover at maximum. Range 0 to 65 535, binary format.
DW1	(bits 15 to 8)	1st CHARACTER, first text character.
DW	(bits 8 or 0)	Last CHARACTER, LSB is defined by the Bit Count.

8. Digital Serial Defines digital serial data such as PCM externally External CLK clocked.

HW1	(bits 15 to 11)	CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel.
	(bits 10 to 8)	CHT = 2, Channel Type = 2, digital serial or data and clock over sampled data.
	(bits 7 to 4)	FMT = 0 Format = 0, defines 1-bit data samples.
	(bit 3)	NSIB, No Samples In Block (Bit Count=0) header only.
	(bit 2)	OVR, Overrun indicates that input is clocking at faster
		than specified rate. Data is truncated at specified bit rate
		(Bit Count per Block).
HW	(bits 15 to 0)	Bit_Count, defines the number of valid data bits in the
		data block starting with the most significant bit of the first
		data word DW1. Variable word length of the data block is
		the Integer of ((Bit_Count + 15)/16). Range 0 to 65 535,
		binary format. Limited by set maximum rate.
HW	(bit 15)	I/E = 0, Internal / External clock flag indicates that
		external clocking was used with relative phasing to block as specified in next field.
	(bits 14 to 0)	Time Delay provides the measure of time between start of
		block period and the first external clock in derived clock
		periods. Range 0 to 20 160, binary format.
DW1	(bit 15)	DS, first data sample at the first clock time in the block.
Dw_n	(bit L)	DS _L , last data sample in this block period.

9. Digital Serial Defines digital serial data low rate (> 2 samples per block period) Internal CLK internally oversampled.

	HW1	(bits 15 to 11)	CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel.
		(bits 10 to 8)	CHT = 2, Channel Type = 2, Digital serial or data and clock over sampled data.
		(bits 7 to 4)	FMT = 0 Format = 0, defines 1-bits data samples.
		(bits 3 to 0)	0, reserved.
٠	HW2	(bits 15 to 0)	Bit_Count defines the number of valid data bits in the
			data block starting with the most significant bit of the first
			data word DW1. Variable word length of the data block is
	• • •		the Integer of ((Bit_Count + 15)/16). Range 0 to 65 535,
			binary format. Limited by set maximum rate.
	HW3	(bit 15)	I/E = 1, Internal Sampling flag indicates that internal sampling was used as specified in next field.
		(bits 14 to 9)	TBD

	(bits 8 to 0)	SAMPLE PERIOD, defines the period of the over- sampling clock that samples data and clock, in derived clock periods. Range 0 to 4 mega samples per second,
DW1	(bit 15)	binary format. DS, first data sample at block time.
	(bit 7)	CS, first clock sample at block time.
DWn	(bit 8)	DS, last data sample in this block period.
	(bit 0)	CS, last clock sample in this block period.
	(610 0)	L, and one on sompto in the contract of the co
10. Digital Externa		nes digital data including serial externally clocked.
HW1	(bits 15 to 11)	CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel.
	(bits 10 to 8)	CHT = 3, Channel Type = 3, Digital parallel or serial data.
	(bits 7 to 4)	FMT, Format, defines the number of bits minus one in each sample. Data block sample size (bits) = (FMT+1). Range 0 to 15, binary format.
	(bit 3)	NSIB, No Samples In Block (Bit_Count = 0) Header only.
·	(bit 2)	OVR, Overrun indicates that input is clocking at faster than specified rate. Data is truncated at specified bit rate (Bit Count per Block).
HW2	(bits 15 to 0)	Bit_Count defines the number of valid data bits in the data block starting with the most significant bit of the first data word DW1. Variable word length of the data block is the Integer of ((Bit_Count + 15)/16). Range 0 to 65 535, binary format. Limited by set maximum rate.
HW3	(bit 15)	I/E = 0, Internal / External clock flag indicates that external clocking was used with relative phasing to block as specified in next field.
	(bits 14 to 0)	Time delay provides the measure of time between start of block period and the first external clock in derived clock periods. Range 0 to 20 160, binary format.
DW1	(bit 15)	DS ₁ , MSB of the first data sample at the first clock time in the block.
DW_n	(bit L)	DS _L , LSB of the last data sample in this block period.
11. Analog	=	nes analog wide band data using a sampling A/D and internal synchronous clock.

HW1 (bits 15 to 11) CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel.

	(bits 10 to 8)	CHT = 4, Channel Type = 4, analog wide band sampled
	(bits 7 to 4)	data. FMT, Format, defines the number of bits minus one in each sample. Data block Sample Size (bits) = (FMT+1). Range 0 to 15, binary format. Limited by the A/D resolution.
	(bit 3)	AOR, Analog over range (A/D 4-msb = F).
	(bits 2 to 0)	ST2 to ST4, reserved status
HW2	(bits 15 to 0)	Bit_Count defines the number of valid data bits in the data block starting with the MSB of the first data word DW1. Variable word length of the data block is the
		Integer of ((Bit_Count + 15)/16). Range 0 to 65 535,
HW3	(bit 15)	binary format. Limited by set maximum rate. I/E = 1, Internal Sampling flag indicates that internal sampling was used as specified in next field.
	(bits 14 to 12)	TBD
	(bits 11 to 0)	Sample Period defines the period of the over-sampling clock that samples data and clock, in derived clock periods. Range 0 to 4m samples per second, binary
		format.
DW1	(bit 15)	DS ₁ , MSB of the first data sample at the first clock time in the block.
DW_n	(bit L)	DS _L , LSB of the last data sample in this block period.
12. Analog "L" &		es analog stereo data using a sigma-delta A/D and internal synchronous clock with tracking Finite Impulse Response filter.
HW1	(bits 15 to 11)	CHN ID, Channel ID number, from 0 to 30 binary number represents normal channel.
	(bits 10 to 8)	CHT = 5, Channel Type = 5, Analog stereo voice band data.
	(bits 7 to 4)	FMT, Format defines the number of bits minus one in each sample. Data block sample size (bits) = (FMT+1). Range 0 to 15, binary format. Limited by the A/D resolution.
	(bit 3) (bit 2)	LAOR, left subchannel over range. RAOR, right subchannel over range.
	(bits 1 to 0)	ST2 to ST4, reserved status.
HW2	(bits 15 to 0)	Bit_Count defines the number of valid data bits in the data block starting with the MSB of the first data word DW1. Variable word length of the data block is the Integer of ((Bit_Count + 15)/16). Range 0 to 65 535, binary format. Limited by set maximum rate.

HW3	(bit 15)	I/E = 1, Internal Sampling flag indicates that internal sampling was used as specified in next field.
•	(bit 14)	ENL, Enable Left subchannel.
	(bit 13)	ENR, Enable Right subchannel.
	(bit 12)	TBD
	(bits 11 to 0)	Sample period defines the period of the over-sampling
		clock that samples data and clock, in derived clock
	•	periods. Range 3.76 to 40K samples per second, binary
		format.
DW1	(bit 15)	DS, MSB of the first data sample left subchannel if
		enabled.
	(bit 15-	DS, MSB of the first data sample right
	FMT-1)	subchannel if enabled, else second sample.
DWn	(bit L)	DS _L , LSB of the last data sample in this block period.

Defines fill word that can be inserted at the end of all channel data blocks if required by the constant rate primary channel.

Fwx (bits 15 to 0) FILL, defined as FFFF hex word.

	15 14	13 12 11 10	16 B	6 5 4 3 2 1
General Form	HW1 HW2 HW3	CHN ID	CHT TIME DELAY	THT ST1 ST2 ST4 ST4 ST4 ST4 ST4 ST4 ST4 ST4 ST4 ST5 ST4 ST4 ST4 ST5 ST4 ST4 ST5 ST5 ST4 ST4 ST5 ST5 ST4 ST4 ST5 ST5 ST4 ST5 ST5 ST4 ST5 ST5
Frame Sync	HW1 HW2 HW3 BRC	CHN ID = 1F	CHT = 0 SYNC 2 = 1	= BF1E hex SYNC 1 = F8C7 hex (full word) = BF1E hex AOE PCR ST3 ST4
Time Tag	HW1 HW2 HW3	CHN ID = 0 to 30 State SECONDS (BCD)	CHT = 0 lsb	MSB DAYS (BCD) MINUTES (BCD) Isb FRACTIONAL SECONDS Isb
Annotation Text	HW2 HW2 HW3 DW1	CHN ID = 0 to 30 msb 1 ST CHARACTER	CHT = 1 BIT COUNT BLOCK COUNT Isb	FMT = 7 NC OVR PE OE NUNT COUNT msb 2ND CHARACTER 1sb
	DWn msb	sb Last CHARACTER	lsb	UNDEFINED if not last
Digital Srl. Ext. CLK	1/E=0 DS, DS	CHN ID = 0 to 30 CHT S, DS, DS, DS, DS, DS, $\frac{1}{2}$	$= 2$ BIT ($DS_{r} \mid DS_{R}$	FMT = 0
	Dwn [1	

Figure G-4a. Submux data format.

		15	14 13 12 11 10 9 8 7 6 5 4 3 2 1 0
	Digital Srl. Int. CLK	HW1 HW2 HW3 DW1	CHN ID = 0 to 30 CHT = 2 FMT = 0 0 0 0 ST3 I/E=1 BIT COUNT = L SAMPLE PERIOD DS ₁ DS ₂ DS ₃ DS ₄ DS ₅ DS ₇ CS ₇ CS ₇ CS ₇ CS ₇ CS ₇
		: DWn	.4 DSL-3 DSL-2 DSL-1 DSL CSL
	Digital Prl. Ext. CLK	HW1 HW2 HW3 DW1	3.3
	,	: DWn	MSB Last SAMPLE LSB=bit L UNDEFINED if not last
G-21	Analog Wide Band	HW1 HW2 HW3	CHN ID = 0 to 30 CHT = 4 FMT=0 to 15 (shown =7) AOR ST2 ST3 I/E=1 BIT COUNT = L SAMPLE PERIOD SAMPLE PERIOD MSB 2 RD SAMPLE
	·	: DWn	Last SAMPLE
	Analog Stereo "L" & "R"	HW1 HW2 HW3 DW1	CHN ID = 0 to 30 CHT = 5 FMT=0 to 15 (shown = 7) LAO RAO ST3 I/E=1 ENL ENR SAMPLE "L" SAMPLE PERIOD MSB 1 ST SAMPLE "L"
		: DWn	MSB Last SAMPLE UNDEFINED if not last
,	Fill	FW	Fill Word = FFFF hex

Figure G-4b. Submux data format.

Eissal Data	 		37:1-1- D -4		
Fixed Rate Channel	4		Variable Rat Channel	e	
Frame 1	Block		Frame 1	Block	
1 Tuille 1	Sync		1 Tunne 1	Sync	·
	CHN #0			CHN #0	
	CIII #0	· ·		Cmv #0	
				1	
					į
	CHN #1		• •	CHN #1	
	Cfin #1			CIIN#1	
].	•			
	CITY				
	CHN #3			CHN #3	
					·
	CHN #17			CHN #17	
	GTD I III 0				
	CHN #18		•	CHN #18	
				1.	
	777 7				•
	FILL				
Frame 2	Block		Frame 2	Block	
	Sync			Sync	
	CHN #0			CHN #0	
		,	٠		
	CIDI #1			CIDI //1	
	CHN #1			CHN #1	
	CHN #3			CHN #3	
	CIIIV#3			CIIIV#3	
	CHN #17	•		CHN #17	
	Ciliv#17	•		CIIIV#17	
			•		
	CHN #18			CHN #18	
	FILL	1			
		<u></u>			

Figure G-5. Submux aggregate format.

APPENDIX H

APPLICATION OF THE TELEMETRY ATTRIBUTES TRANSFER STANDARD

APPENDIX H

APPLICATION OF THE TELEMETRY ATTRIBUTES TRANSFER STANDARD

Interchange of telemetry attributes occurs between vehicle instrumentation organizations (the source) and the telemetry ground stations (the destination). Interchange may also take place between ranges. The typical elements of this process are

- data entry system
- source data base
- export program
- interchange medium [this standard]
- import program
- destination data base
- telemetry setup system
- telemetry processing equipment

These elements are depicted in figure H-1 and are defined next.

- 1. The <u>data entry system</u> is the source organization's human interface where telemetry attributes are entered into a computer-based system. (Not affected by this standard.)
- 2. The <u>source database</u> is where telemetry attributes are maintained in a form appropriate to the local organization's needs. (Not affected by this standard.)
- 3. The <u>export program</u> converts the telemetry attributes from the source database format to the format defined by this standard and stores them on the interchange medium.
- 4. The <u>interchange medium</u> contains the telemetry attributes being transferred from the source organization to the destination organization. Format and contents are defined by this standard.
- 5. The <u>import program</u> reads the standardized interchange medium and converts the attributes to the destination data base format in accordance with local needs, system characteristics, and limitations.
- 6. The <u>destination data base</u> is where telemetry attributes are maintained in a form suitable to the local ground station's needs. (Not affected by this standard.)

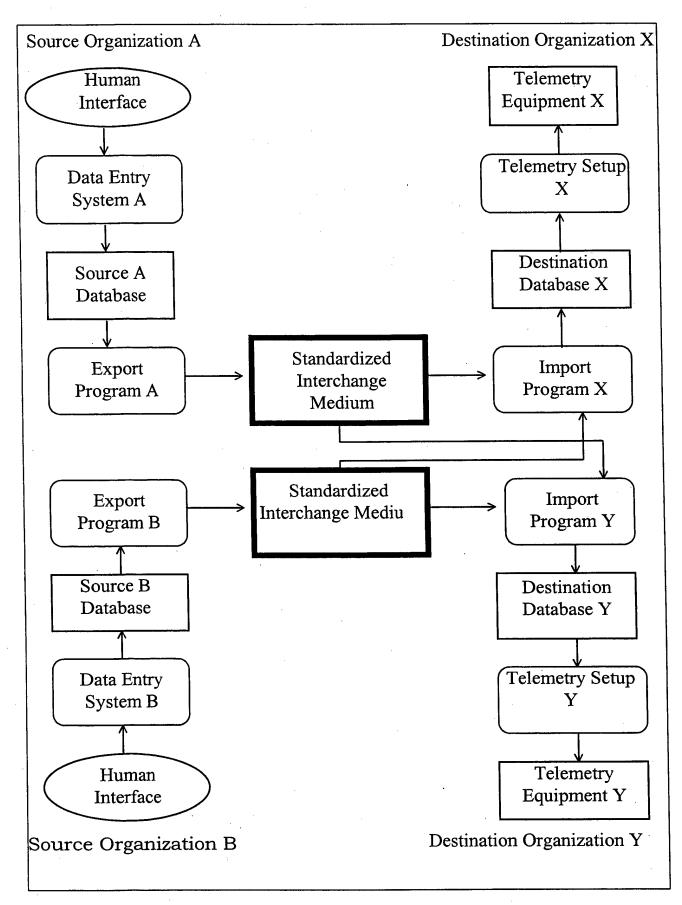


Figure H-1. Typical elements of the telemetry attributes transfer process.

- 7. The <u>telemetry setup system</u> accesses the destination database to load the telemetry processing equipment. (Not affected by this standard.)
- 8. The <u>telemetry processing equipment</u> is where the attributes will ultimately be used to properly handle the data being transmitted. (Not affected by this standard.)

The interchange medium is intended as a standard means of information exchange. The source and destination organizations are not constrained by this standard as to how the attributes are stored, viewed, used, or maintained.

To use the attribute transfer standard, import and export software must be developed. Once in place, these programs should eliminate the need for test item or project specific software at either the supplying (source) organizations or the processing (destination) organizations.

APPENDIX I

TELEMETRY ATTRIBUTES TRANSFER STANDARD COVER SHEET

APPENDIX I

TELEMETRY ATTRIBUTES TRANSFER STANDARD COVER SHEET

Each attribute transfer file (disk or tape) should be accompanied by a cover sheet describing the originating agency's computer system used to construct the attribute file. The recommended format for this cover sheet is given here.

Telemetry Measurement Attributes Transfer Standard

Date: MM\DD\YY

From: Name

Address

Telephone

To: Name

Address

Telephone

Originating computer system:

Computer make and model:

Medium characteristics:

Description:

Comments:

APPENDIX J

TELEMETRY ATTRIBUTES TRANSFER STANDARD FORMAT EXAMPLE

APPENDIX J

TELEMETRY ATTRIBUTES TRANSFER STANDARD FORMAT EXAMPLE

The following example is for illustrative purposes and is by no means a complete attributes file; it is representative of the types of information likely to be transferred. Many attributes are purposely omitted to simplify the example. In some of the groups, only those entries necessary to link to other groups are provided. Attributes, which link the various groups together, are indicated in **boldface**.

Selected attributes are described in text form as an aid to following the example. All text, which describes the example, is printed in italics. All text, which is part of the example file, is printed in plain text.

The example file being transferred consists of the attributes of a single RF data source and an analog tape containing two data sources. The RF data source is a PCM signal, which contains an embedded asynchronous wave train. The two recorded data sources are PCM signals: one is an aircraft telemetry stream, and the other is a radar data telemetry stream. Figure J-1 shows the example file in terms of the attribute groups and their interrelationships. Refer to the attribute tables while reviewing the example.

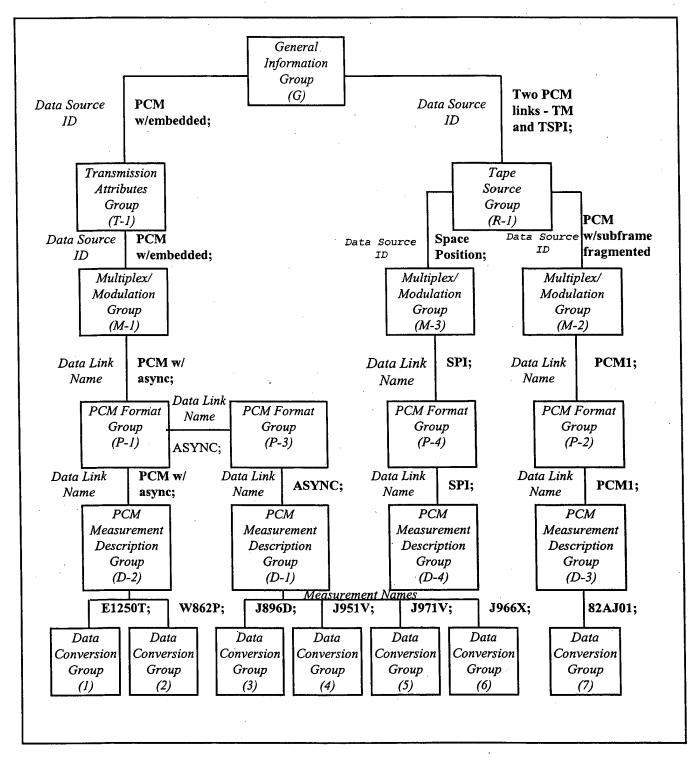


Figure J-1. Group linkages.

General Information Group (G)

Program name, test name, origination date, revision number: 0, test number: 13.

G\PN: TMATS example; G\TA: Wright Flyer; G\OD: 07-12-41; G\RN:0; G\TN:13; G\POC1-1: Wilbur; G\POC2-1: Bikes,LTD; G\POC3-1: Dayton;

G\POC4-1: 555-1212;

Live data source.

G\DSI-1:PCM w/embedded; G\DST-1:RF;

Tape source.

G\DSI-2:Two PCM links - TM & TSPI; G\DST-2:TAP;

G\COM: I hope this flies.; G\POC1-2: Orville;

G\POC2-2:Bikes,LTD; G\POC3-2: Dayton; G\POC4-2: 555-1212;

Transmission Attributes Group (T-1)

Frequency: 1489.5, RF bandwidth: 100, data bandwidth: 100; not encrypted, modulation type: FM, total carrier modulation: 500, no subcarriers, transmit polarization: linear.

T-1\ID:PCM w/embedded; T-1\RF1:1489.5; T-1\RF2:100; T-1\RF3:100; T-1\RF4:FM; T-1\RF5:500; T-1\SCO\N:NO; T-1\AN2:LIN; T-1\AP\POC1: Pat Tern; T-1\AP\POC2:Transmissions,Inc.; T-1\AP\POC3:Amityville,NY; T-1\AP\POC4:800-555-1212;

Tape Source Attributes Group (R-1)

R-1\ID:Two PCM links - TM & TSPI;

R-1\R1:Reel #1; R-1\TC1:ANAL; R-1\TC2:ACME; R-1\TC3:795;

Tape width: 1 inch, reel diameter: 14 inches, 14 tracks, record speed: 7.5 inches/second.

R-1\TC4:1.0; R-1\TC5:14.0; R-1\N:14; R-1\TC6:7.5;

Rewound: Yes, manufacturer: ZZ; model: 13, original: yes.

R-1\TC8:Y; R-1\RI1:ZZ; R-1\RI2:13; R-1\RI3:Y; R-1\RI4:07-12-91-07-55-59; R-1\POC1:Mr. Reel; R-1\POC2:Tape Creations; R-1\POC3:Anywhere,Ttown; R-1\POC4:555-1212;

Track Number 2 contains aircraft telemetry PCM (w/subframe fragmented)

 $R-1\TK1-1:2; R-1\TK2-1:FM/FM;$

R-1\DSI-1:PCM w/subframe fragmented; R-1\TK3-1:FWD;

Track Number 4 contains Space Position Information via PCM link

R-1\TK1-2:4; R-1\DSI-2:Space Position Information;

Multiplex/Modulation Groups (M-1, M-2, M-3)

Baseband type: PCM, modulation sense: POS, baseband data: PCM, low pass filter type: constant amplitude

M-1\ID:PCM w/embedded; M-1\BB1:PCM; M-1\BB2:POS; M-1\BSG1:PCM; M-1\BSF2:CA; M-1\BB\DLN:PCM w/async;

M-2\ID:PCM w/subframe fragmented; M-2\BB\DLN:PCM1;

M-3\ID:Space Position; M-3\BB\DLN:SPI;

PCM Format Attributes Groups (P)

P-1 is a live PCM signal and contains the asynchronous wave train (see figure J-2).

P-2 is a recorded signal (see figure J-3).

P-3 is the asynchronous wave train (see figure J-4).

P-4 is a recorded signal.

42	S D A 4 2	i				
41						
40		::				
39	, , , , , , , , , , , , , , , , , , ,	з • · ю				
:		_ ::				•
15		- ::		•		
14		** · · · · · · · · · · · · · · · · · ·				
13		 	1			
12					∞	
]	17.5 s t t			ccept bits.	39 ition	•
=		- :::	_	ie) ez oits is 12	tion , pos	
10	∞ + B ∞	:		es t valu as 8 b 11 ha	posi JB42	
6		:: :: ::		tics = 16 minor frames = 10 bits (default value) except Word 10 has 8 bits and Word 11 has 12 bits.	frame ne SU	-5
∞	ied at ls	::		ninor its (d Vord and W	inor bfran	Q = 0
7	Embedded Format (Words 6 - 10)	14 17 14 14 14 14 14 14		.s 16 n 10 bi	at m in su	roup
9	En F	** ** ** ** ** ** ** **		ris ne	a = measurement E1250T at minor frame position 39 b = measurement W862P in subframe SUB42, position 8.	PCM Format Group = P-1 PCM Measurement Description Group = D-2
5				rame characte one major frat Word lengths	it E12	2-1 script
4		** ** ** ** ** ** ** **		re cha majo rd ler	emer	t Des
3				fram one Wo	easur	PCM Format Group = P-1 PCM Measurement Descr
2		****	·	fajor	= me	mat
	О года			. <u>2</u>	а Ф	PCM Format Group = P-1 PCM Measurement Description G
	H D D D L	—::::- H				PCN PCN
Sync	20 bits					

Figure J-2. PCM format for PCM w/async.

	14 113 114 120 121 122 276	SUB SUB 113 121		6 4	Bits Bits	
	13 17	C C	0 =		- -	1
	2 3 12 13		217			
				,	1 0 0 1	
-	Sync	30 Rite				

Major frame characteristics:

One major frame = 64 minor frames
Subframes SUB113 and SUB121 are 32 deep
ID counter counts 0 - 63
Word lengths = 10 (default value) except
Word 121 has 6 bits
and Word 122 has 4 bits.

Measurement 82AJ01 is 16 bits, which is fragmented with the 10 most significant bits indicated as M and the 6 least significant bits as L. The measurement is located in position 5 of subframes SUB113 and SUB121 (minor frames 5 and 37 of the major frame).

PCM Format Group = P-2
PCM Measurement Description Group = D-3
Data Link Name = PCM1

Figure J-3. PCM format for PCM1

	Sync	-	2	n				14	:	20	:	29	:	33		39		45	45 46 47	47	48	49
<u>m</u>	16 Bits	B n e	rd rd	Q.	:	<i>c</i> c	:	ပ	:	- RO	:	В	•	G	•		:	S U		æ		
		2 2 4	ng ng	S U	:	es es	:	A D	:	æ	:	В	:	cs.		o A w	:	B 2		в		
		o =	es es	<u>n</u>	:	es es	:	3 B	:	es es	:	es .	•	В	•	U B	•	Ģ		ಡ		
				Maj One Wor	or Fra major d leng	me chi r frame ths =	Major Frame characteristics One major frame = 3 minor frames Word lengths = 16 bits (default valu	istics iinor fi (defau	Major Frame characteristics One major frame = 3 minor frames Word lengths = 16 bits (default value)	(e)												
		4	= me	asure asure	ment .	1971U, sug	f, super in sub	comm	a = measurement J971U, supercommutated at positions 2, 11, 20, 29, 33, and 47 b = measurement J951V in subframe ASUB1, position 1	at pos	itions ition 1	2, 11,	20, 29,	, 33, ai	nd 47	-						

Figure J-4. PCM format for async.

(Start of P-1)

Live PCM signal (host wave train): Class I

P-1\DLN:PCM w/async; P-1\D1:NRZ-L; P-1\D2:44000; P-1\D3:U; P-1\D4:N; P-1\D6:N; P-1\D7:N; P-1\TF:ONE;

10 bits default word length, 16 minor frames/major frame, 43 words/frame

P-1\F1:10; P-1\F2:M; P-1\F3:NO; P-1\MF\N:16; P-1\MF1:43; P-1\MF2:440; P-1\MF3:FPT; P-1\MF4:20; P-1\MF5: 01111010011010110001; P-1\SYNC1:1; P-1\SYNC2:0; P-1\SYNC3:1;P-1\SYNC4:0;

Word position #10, 8 bits, Word position #11, 12 bits

P-1\MFW1-1:10; P-1\MFW2-1:8; P-1\MFW1-2:11; P-1\MFW2-2:12;

One subframe ID counter

P-1\ISF\N:1; P-1\ISF1-1:1; P-1\ISF2-1:ID; P-1\IDC1-1:1;

ID counter word length: 10 bits, MSB starting bit location: 7, ID counter length: 4

P-1\IDC2-1:10; P-1\IDC3-1:7; P-1\IDC4-1:4; P-1\IDC5-1:M; P-1\IDC6-1:0; P-1\IDC7-1:1; P-1\IDC8-1:15; P-1\IDC9-1:16; P-1\IDC10-1:INC;

Subframe definition SUB42 is located at 42, SUB15 at 15. All have depth 16.

P-1\SF\N-1:2;

P-1\SF1-1-1:SUB42; P-1\SF2-1-1:NO; P-1\SF4-1-1-1:42; P-1\SF6-1-1:16; P-1\SF1-1-2:SUB15; P-1\SF2-1-2:NO; P-1\SF4-1-2-1:15; P-1\SF6-1-2:16; Asynchronous embedded wave train information

Data Link Name (to be referenced in the format definition of the asynchronous wave train) is ASYNC.

Five contiguous minor frame word positions starting at location 6.

P-1\AEF\N:1; **P-1\AEF\DLN-1:ASYNC**; P-1\AEF1-1:5; P-1\AEF2-1:CW; P-1\AEF3-1-1:6;

(End of P-1)

(Start of P-2)

Recorded PCM signal format attributes.

Data Link Name is PCM1, Data Format is NRZ-L, Bit rate is 2 Mbit/sec, Unencrypted, Normal polarity, class I, Common word length is 10, MSB first, No parity, 64 minor frames per major frame, 277 words per minor frame, Sync pattern length is 30. Word position 121 is 6 bits. Word position 122 is 4 bits.

P-2\DLN:PCM1;P-2\D1:NRZ-L; P-2\D2:2000000; P-2\D3:U; P-2\D4:N; P-2\TF:ONE; P-2\F1:10; P-2\F2:M; P-2\F3:NO; P-2\MF\N:64; P-2\MF1:277; P-2\MF4:30; P-2\MF5:10111000000110011111010110111; P-2\SYNC1:1; P-2\MFW1-1:121; P-2\MFW2-1:6; P-2\MFW1-2:122; P-2\MFW2-2:4;

Subframe characteristics:

One subframe ID counter named 1. Sync type is ID counter. ID counter location is 13. ID counter word length is 10. ID counter MSB location is 5. ID counter length is 6. ID counter transfer order is MSB first. ID counter initial value is 0. ID counter initial subframe is 1. ID counter end value is 63. ID counter end subframe is 64. ID counter is increasing.

Two subframes. First subframe name is SUB121. Not supercommutated, subframe location = word position 121, depth = 32. Second subframe name is SUB113. Not supercommutated, location = 113, depth = 32.

P-2\ISF\N:1; P-2\ISF1-1:1; P-2\ISF2-1:ID; P-2\IDC1-1:13; P-2\IDC2-1:10; P-2\IDC3-1:5; P-2\IDC4-1:6; P-2\IDC5-1:M; P-2\IDC6-1:0; P-2\IDC7-1:1; P-2\IDC8-1:63; P-2\IDC9-1:64; P-2\IDC10-1:INC; P-2\SF\N-1:2; P-2\SF1-1-1:SUB121; P-2\SF2-1-1:NO; P-2\SF4-1-1-1:121; P-2\SF6-1-1:32; P-2\SF1-1-2:SUB113; P-2\SF2-1-2:NO; P-2\SF4-1-2-1:113; P-2\SF6-1-2:32;

(End of P-2)

(Start of P-3)

Asynchronous wave train PCM format attributes.

Data Link Name: ASYNC
Class I, Common word length: 16, LSB transfer order, no parity
3 minor frames per major frame, 50 words/minor frame, 800 bits
per minor frame, fixed pattern synchronization, 16 bit syncpattern.

P-3\DLN:ASYNC; P-3\TF:ONE; P-3\F1:16; P-3\F2:L; P-3\F3:NO; P-3\MF\N:3; P-3\MF1:50; P-3\MF2:800; P-3\MF3:FPT; P-3\MF4:16; P-3\MF5: 1111100110110001; P-3\SYNC1:1;

Subframe definition.

Three subframes with ID counter word length 16 at word position 1.

P-3\ISF\N:1; P-3\ISF1-1:2; P-3\ISF2-1:ID; P-3\IDC1-1:1; P-3\IDC2-1:16; P-3\IDC3-1:15; P-3\IDC4-1:2; P-3\IDC5-1:L; P-3\IDC6-1:0; P-3\IDC7-1:1; P-3\IDC8-1:2; P-3\IDC9-1:3; P-3\IDC10-1:INC;

ASUB1 is at word position 3.
ASUB2 is at word position 45.
ASUB3 is supercommutated at word positions 14 and 39.

P-3\SF\N-1:3; P-3\SF1-1-1:ASUB1; P-3\SF2-1-1:NO; P-3\SF3-1-1:NA; P-3\SF4-1-1-1:3; P-3\SF6-1-1:3; P-3\SF1-1-2:ASUB2; P-3\SF2-1-2:NO; P-3\SF3-1-2:NA; P-3\SF4-1-2-1:45; P-3\SF6-1-2:3; P-3\SF1-1-3:ASUB3; P-3\SF2-1-3:2; P-3\SF3-1-3:EL; P-3\SF4-1-3-1:14; P-3\SF4-1-3-2:39; P-3\SF6-1-3:3;

(End of P-3)

(Start of P-4)

P-4\DLN:SPI;

(End of P-4)

PCM Measurement Description (D)

D-1 contains the measurements which make up the asynchronous wave train,

D-2 contains the measurements which make up the live PCM signal (which hosts the asynchronous wave train),

D-3 contains the measurements which make up one of the recorded PCM signals, and

D-4 contains the measurements which make up the other recorded PCM signal.

(Start of D-1)

Asynchronous Wave Train: One measurement list, 4 measurements

D-1\DLN:ASYNC; D-1\ML\N:1; D-1\MLN-1:JUST ONE; D-1\MN\N-1:4;

Measurement Name: J896D, LSB first,

Subframe supercommutated, 2 locations: 1 and 4 of ASUB3.

D-1\MN-1-1:J896D; D-1\MN3-1-1:L; D-1\LT-1-1:SFSC;

D-1\SFS1-1-1:ASUB3; D-1\SFS\N-1-1:2; D-1\SFS2-1-1:E;

D-1\SFS6-1-1-1:1; D-1\SFS6-1-1-2:4; D-1\SFS7-1-1-1:FW;

D-1\SFS7-1-1-2:FW;

Measurement Name: J951V, LSB first, default parity, subframe ASUB1, location 1.

D-1\MN-1-2:J951V; D-1\MN1-1-2:DE; D-1\MN2-1-2:D; D-1\MN3-1-2:L; D-1\LT-1-2:SF; D-1\SF2-1-2:1; D-1\SFM-1-2:11111111100000000; D-1\SF1-1-2:ASUB1;

Measurement Name: J971U, LSB first, supercommutated at positions 2, 11, 20, 29, 33, and 47.

D-1\MN-1-3:J971U; D-1\MN1-1-3:DE; D-1\MN2-1-3:D; D-1\MN3-1-3:L; D-1\LT-1-3:MFSC; D-1\MFS\N-1-3:6; D-1\MFS1-1-3:E; D-1\MFSW-1-3-1:2; D-1\MFSW-1-3-2:11; D-1\MFSW-1-3-3:20; D-1\MFSW-1-3-4:29; D-1\MFSW-1-3-5:33; D-1\MFSW-1-3-6:47;

Measurement Name: J966X, LSB first, subframe ASUB2, location 3.

D-1\MN-1-4:J966X; D-1\MN1-1-4:DE; D-1\MN2-1-4:D; D-1\MN3-1-4:L; D-1\LT-1-4:SF; D-1\SF1-1-4:ASUB2; D-1\SF2-1-4:3; D-1\SFM-1-4:FW;

(End of D-1)

(Start of D-2)

Live PCM signal: single measurement list, 2 measurements.

D-2\DLN:PCM w/async; D-2\MLN-1:JUST ONE; D-2\MN\N-1:2;

Measurement name: E1250T, unclassified, unsigned, MSB first.

D-2\MN-1-1:E1250T; D-2\MN1-1-1:DE; D-2\MN2-1-1:D; D-2\MN3-1-1:M; D-2\LT-1-1:MF; D-2\MF-1-1:39; D-2\MFM-1-1:FW;

Measurement name: W862P, unclassified, MSB first, subframe name: SUB42, location 8 in subframe, full word.

D-2\MN-1-2:W862P; D-2\MN1-1-2:DE; D-2\MN2-1-2:D; D-2\MN3-1-2:M; D-2\LT-1-2:SF; D-2\SF1-1-2:SUB42; D-2\SF2-1-2:8; D-2\SFM-1-2:FW;

(End of D-2)

(Start of D-3)

Recorded PCM signal: single measurement list: 1 measurement.

D-3\DLN:PCM1; D-3\MLN-1:ONLY ONE; D-3\MN\N-1:1;

Measurement name: 82AJ01, subframe fragmented, 2 fragments, subframes: SUB113 and SUB121, subframe location: 5.

D-3\MN-1-1:82AJ01; D-3\LT-1-1:SFFR; D-3\FSF\N-1-1:2; D-3\FSF1-1-1:16; D-3\FSF2\N-1-1:2; D-3\FSF3-1-1-1:SUB113; D-3\FSF3-1-1-2:SUB121; D-3\FSF4-1-1-1:E; D-3\FSF8-1-1-1-1:5;

(End of D-3)

(Start of D-4)

Recorded PCM signal

D-4\DLN:SPI;

(End of D-4)

Data Conversion Groups (C)

C-1 and C-2 are measurements which are part of the live PCM signal (see also D-2).

C-3, C-4, C-5, and C-6 are from the asynchronous wave train (see also D-1).

C-7 is from the recorded PCM signal (see also D-3).

Measurement: E1250T, description: Inlet Temp Bellmouth, units: Deg C, binary format: unsigned; high value: 128, low value: -0.4,

conversion type: pair sets, number of pair sets: 2, application (polynomial): Yes; order of fit: 1,

telemetry value #1: 0, engineering unit value #1: -0.4, telemetry value #2: 1023, engineering unit value #2: 128.

C-1\DCN:E1250T; C-1\MN1:Inlet Temp Bellmouth; C-1\MN3:DEGC; C-1\BFM:UNS; C-1\MOT1:128; C-1\MOT2:-0.4; C-1\DCT:PRS; C-1\PS\N:2; C-1\PS1:Y; C-1\PS2:1; C-1\PS3-1:0; C-1\PS4-1:-0.4; C-1\PS3-2:1023; C-1\PS4-2:128;

Measurement: W862P, description: Fuel Pump Inlet, binary format: unsigned; conversion type: pair sets, number of pair sets: 2, application (polynomial): Yes; order of fit: 1, telemetry value #1: 0, engineering unit value #1: -0.1 telemetry value #2: 1023, engineering unit value #2: 76.7

C-2\DCN:W862P; C-2\MN1:Fuel Pump Inlet; C-2\BFM:UNS; C-2\DCT:PRS; C-2\PS\N:2; C-2\PS1:Y; C-2\PS2:1; C-2\PS3-1:0; C-2\PS4-1:-0.1; C-2\PS3-2:1023; C-2\PS4-2:76.7;

Measurement: J896D, description: Terrian Altitude, units: Feet, binary format: two's complement; high value: 32768, low value: -32768, conversion type: pair sets; number of pair sets: 2, application (polynomial): Yes, order of fit: 1, telemetry value #1: -32768, engineering unit value #1: -32768, telemetry value #2: 32767, engineering unit value #2: 32767

C-3\DCN:J896D; C-3\MN1:Terrian Altitude; C-3\MN3:FEET; C-3\BFM:TWO; C-3\MOT1:32768; C-3\MOT2:-32768; C-3\DCT:PRS; C-3\PS\N:2; C-3\PS1:Y; C-3\PS2:1; C-3\PS3-1:-32768; C-3\PS4-1:-32768; C-3\PS4-2:32767; C-3\PS4-2:32767;

Measurement: J951V, description: Throttle Command, units: VDC, high value: 10.164, low value: -10.164, conversion type: pair sets, number of pair sets: 2, application(polynomial): Yes, order of fit: 1, telemetry value #1: -128, engineering unit value #1: -10.164, telemetry value #2: 127, engineering unit value #2: 10.164 binary format: two's complement;

C-4\DCN:J951V; C-4\MN1:Throttle Command; C-4\MN3:VDC; C-4\MOT1:10.164; C-4\MOT2:-10.164; C-4\DCT:PRS; C-4\PS\N:2; C-4\PS1:Y; C-4\PS2:1; C-4\PS3-1:-128; C-4\PS4-1:-10.164; C-4\PS3-2:127; C-4\PS4-2:10.164; C-4\BFM:TWO;

Measurement: J971U; description: DISC, conversion type: discrete, binary format: unsigned.

C-5\DCN:J971U; C-5\MN1:DISC; C-5\DCT:DIS; C-5\BFM:UNS;

Measurement: J966X; description: Discrete, conversion type: discrete, binary format: unsigned.

C-6\DCN:J966X; C-6\MN1:Discrete; C-6\DCT:DIS; C-6\BFM: UNS;

Measurement: 82AJ01, description: LANTZ Norm acceleration, units: MTR/S/S, High value: 1023.97, Low value: -1023.97, conversion type: Coefficients
Order of curve fit: 1, derived from pair sets: No,
Coefficient (0): 0, Coefficient(1): 0.03125, binary format: two's

complement

C-7\DCN:82AJ01; C-7\MN1:LANTZ Norm acceleration; C-7\MN3:MTR/S/S; C-7\MOT1:1023.97; C-7\MOT2:-1023.97; C-7\DCT:COE; C-7\CO\N:1; C-7\CO1:N; C-7\CO:0; C-7\CO-1:.03125; C-7\BFM:TWO;

APPENDIX K

PULSE AMPLITUDE MODULATION STANDARDS

APPENDIX K

PULSE AMPLITUDE MODULATION STANDARDS

1.0 General

This standard defines the recommended pulse train structure and design characteristics for the implementation of PAM telemetry systems. The PAM data are transmitted as time division multiplexed analog pulses with the amplitude of the information channel pulse being the analog- variable parameter.

2.0 Frame and Pulse Structure

Each frame consists of a constant number of time-sequenced channel intervals. The maximum frame length shall be 128 channel time intervals per frame, including the intervals devoted to synchronization and calibration. The pulse and frame structure shall conform to either figure K-1 or K-2.

- 2.1.1 Commutation Pattern. The information channels are allocated equal and constant time intervals within the PAM frame. Each interval ("T" in figures K-1 and K-2) contains a sample pulse beginning at the start of the interval and having amplitude determined by the amplitude of the measurand of the corresponding information channel according to a fixed relationship (usually linear) between the minimum level (zero amplitude) and the maximum level (full-scale amplitude). For a 50-percent duty cycle (RZ-PAM), the zero level shall be 20 to 25 percent of the full amplitude level as shown in figure K-1. The pulse width shall be the same in all time intervals except for the intervals devoted to synchronization. The duration shall be either 0.5T \pm 0.05, as shown in figure K-1, or T \pm 0.05, as shown in figure 5-2.
- 2.1.2 <u>In-Flight Calibration</u>. It is recommended that in-flight calibration be used and channels 1 and 2, immediately following the frame synchronization interval, be used for zero and full-scale calibration. For RZ-PAM, channel 3 may be used for an optional half-scale calibration, and for NRZ-PAM, the channel interval preceding channel 1 may be used for half-scale calibration if set to 50 percent.
- 2.1.3 <u>Frame Synchronization Interval</u>. Each frame is identified by the presence within it of a synchronization interval.
- 2.1.3.1 <u>Fifty Percent Duty Cycle (RZ-PAM)</u>. The synchronization pattern interval shall have a duration equal to two information channel intervals (2T) and shall be full-scale amplitude for 1.5T followed by the reference level or zero baseline for 0.5T (see figure K-1).

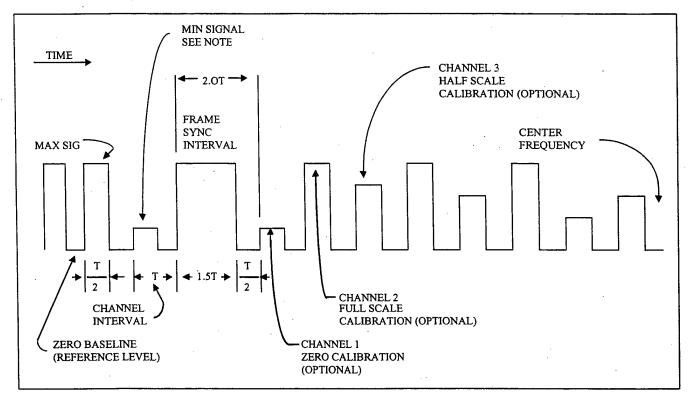



Figure K-1. 50-percent duty cycle PAM with amplitude synchronization.



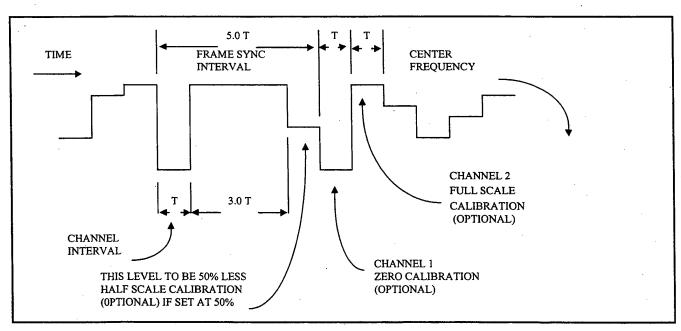


Figure K-2. 100-percent duty cycle PAM with amplitude synchronization.

- 2.1.3.2 One Hundred Percent Duty Cycle (NRZ-PAM). The synchronization pattern is in the order given: zero level for a period of T, full-scale amplitude for a period of 3T, and a level not exceeding 50-percent full-scale amplitude for a period T (see figure K-2).
- 2.1.4 <u>Maximum Pulse Rate</u>. The maximum pulse rate should not be greater than that permitted by the following subparagraphs.
- 2.1.4.1 <u>PAM/FM/FM</u>. The reciprocal of the shortest interval between transitions in the PAM pulse train shall not be greater than one-fifth of the total (peak-to-peak) deviation specified in chapter 3 and tables 3-1 and 3-2 for the FM subcarrier selected.
- 2.1.4.2 <u>PAM/FM</u>. The reciprocal of the shortest interval between transitions in the PAM pulse train shall be limited by whichever is the narrower of the following:
- 2.1.4.2.1 One-half of the 3 dB frequency of the premodulation filter when employed.
- 2.1.4.2.2 One-fifth of the intermediate frequency (IF) bandwidth (3 dB points) selected from the IF bandwidths which are listed in table 2-1.
- 2.2 <u>Frame and Pulse Rate</u>. The frame and pulse parameters listed below may be used in any combination:
 - a minimum rate of 0.125 frames per second, and
 - a maximum pulse rate as specified in subparagraph 2.1.4.
- 2.2.1 <u>Long Term Accuracy and Stability</u>. During a measured period of desired data, the time between the occurrence of corresponding points in any two successive frame synchronization intervals should not differ from the reciprocal of the specified nominal frame rate by more than 5 percent of the nominal period.
- 2.2.2 Short Term Stability. During a measured period, P, containing 1000-channel intervals, the time between the start of any two successive channel intervals (synchronization intervals excepted) should not differ from the average channel interval established by the formula $T_{avg} = \underline{P}$ by more than 1 percent of the average interval 1000
- 2.3 <u>Multiple and Submultiple Sampling Rates</u>. Data multiplexing at sampling rates which are multiples and submultiples of the frame rate is permissible.
- 2.3.1 <u>Submultiple Frame Synchronization</u>. The beginning of the longest submultiple frame interval is identified by the transmission of a synchronization pattern. All other submultiple frames have a fixed and known relationship to the identified submultiple frames.

- 2.3.1.1 <u>Fifty Percent Duty Cycle (RZ)</u>. The synchronization pattern has a full-scale amplitude pulse in two successive occurrences of channel intervals allocated to data channels of the identified submultiple frame. The first such pulse has a duration equal to the channel interval; the second pulse immediately follows the first pulse and has a duration nominally one-half the channel interval. There is no return to zero between the two pulses.
- 2.3.1.2 One Hundred Percent Duty Cycle (NRZ). The synchronization pattern has information in five successive occurrences of a channel interval allocated to data channels of the identified submultiple frame. The amplitude of the data channels assigned for synchronization is shown in the following subparagraphs.
- 2.3.1.2.1 First occurrence zero amplitude.
- 2.3.1.2.2 Second, third, and fourth occurrences full-scale amplitude.
- 2.3.1.2.3 Fifth occurrence not more than 50 percent of full-scale amplitude.
- 2.3.2 <u>Maximum Submultiple Frame Length</u>. The interval of any submultiple frame, including the time devoted to synchronizing information, shall not exceed 128 times the interval of the frame in which it occupies a recurring position.
- 2.4 <u>Frequency Modulation</u>. The frequency deviation of an FM carrier or subcarrier, which represents the maximum and minimum amplitude of a PAM waveform, should be equal and opposite with respect to the assigned carrier or subcarrier frequency. The deviation should be the same for all occurrences of the same level.
- 2.5 <u>Premodulation Filtering</u>. A maximally linear phase response, premodulation filter, is recommended to restrict the radiated spectrum (see appendix A).

APPENDIX L

ARMOR

APPENDIX L

ARMOR

1.0 General

This standard defines the recommended multiplexer format for single channel data recording on small format (1/2") media (reference 6.17). This format is recognized as the Asynchronous Recorder Multiplexer Output Re-constructor (ARMOR). This format is software-reconfigurable for each data acquisition or reproduction. The ARMOR format configuration information is stored in a data structure called a "setup" that contains all the information necessary to define a particular record or play configuration. This appendix describes the format and content of the ARMOR setup.

1.1 <u>Setup on Tape</u>. When the ARMOR setup is written to tape, it is preceded by a preamble with a unique setup sync pattern that allows the identification of the setup. Three duplicate setup records, each with its own preamble, are written at the beginning of each recording. The format of the preamble is defined in Table L-1.

	LERABLE LE LEARMOR	SETUP PREMIBUEA
FIELD	LENGTH	DESCRIPTION
SETUP SYNC	4 TAPE BLOCKS	THE SYNC PATTERN CONSISTS OF TWO BYTES. THE HIGH BYTE IS 0XE7; THE LOW BYTE IS 0X3D. THE SYNC PATTERN IS WRITTEN HIGH BYTE FIST. FOR THE DCRSI, A TAPE BLOCK IS A SINGLE SCAN (4356 BYTES). FOR THE VLDS, A TAPE BLOCK IS A PRINCIPLE BLOCK (65536 BYTES).
END OF SYNC	3 BYTES	THE THREE BYTES IMMEDIATELY FOLLOWING THE SYNC PATTERN ARE: 0X45, 0X4F, 0X53 (ASCII 'E', 'O', 'S' FOR "END OF SYNC").

2.0 Setup Organization

An ARMOR setup is divided into three sections: the header section, the channel section, and the trailer section. The overall organization of a setup is summarized in Table L-2.

TABLE L-2. SI	ETUP ORGANIZATION
CONTENT	NUMBER OF BYTES
HEADER SECTION	70
CHANNEL 1	51 - 61
INFORMATION	
CHANNEL 2	51 - 61
INFORMATION	
"	"
66	
TRAILER SECTION	0 - 44 + SAVED SCANLIST
	SIZE

2.1 <u>Header Section</u> The header section is the first 70 bytes of a setup. It contains information about the setup as a whole, including clock parameters, frame parameters, and the numbers of input and output channels (see Table L-3).



In tables L-3 through L-12, fields noted with an asterisk (*) require user input per section 2.5.

	ABLE L-3	: SIPADER'S	ECTION EORMAT'S TOTAL STATES
FIELD	BYTES	FORMAT	DESCRIPTION
*SETUP LENGTH	2	BINARY	TOTAL BYTES IN SETUP, INCLUDING THIS FIELD.
SOFTWARE VERSION	12	ASCII	VERSION OF THE ARMOR SETUP AND CONTROL SOFTWARE THAT WROTE THE SETUP.
PRE-SCALERS	1	BINARY	THE BOTTOM FOUR BITS CONTAIN THE BIT RATE CLOCK PRE-SCALER; THE TOP FOUR BITS CONTAIN THE PACER CLOCK PRE-SCALER
RESERVED	26	N/A	N/A
*SETUP KEYS (BIT 0) *SETUP KEYS (BITS	1	BINARY	IF BIT 0 (LSB) SET, SETUP CONTAINS SETUP DESCRIPTION IN TRAILER. IF BIT 1 SET, SETUP CONTAINS
1, 2, & 3)	_		CHECKSUM IN TRAILER. IF BIT 2 SET, SETUP IS SCAN-ALIGNED. IF BIT THREE SET THEN A SCAN LIST IS SAVED.
PACER DIVIDER	2	BINARY	PACER DIVIDER VALUE.
BIT RATE	4	BINARY	AGGREGATE BIT RATE FOR ALL ENABLED CHANNELS.
BRC DIVIDER	2	BINARY	BIT RATE CLOCK DIVIDER VALUE.
MASTER OSCILLATOR	4	BINARY	FREQUENCY OF THE MASTER OSCILLATOR IN BITS PER SECOND.
BYTES OVERHEAD	4	BINARY	TOTAL SYNC BYTES PLUS FILLER BYTES PER FRAME.
PACER	4	BINARY	FREQUENCY OF THE PACER CLOCK IN CYCLES PER SECOND.
FRAME RATE	4	BINARY	NUMBER OF FRAMES PER SECOND.
*INPUT COUNT	2	BINARY	NUMBER OF INPUT CHANNELS IN SETUP.
OUTPUT COUNT	2	BINARY	NUMBER OF OUTPUT CHANNELS IN SETUP.

2.2 <u>Channel Section</u>. The Channel section contains one channel entry for every channel in the multiplexer chassis configuration, including those channels that are not enabled or recorded. The content and length of the channel information vary depending on the channel type. The lengths of the channel entries for each channel type are presented in Table L-4. Tables L-5 through L-13 describe the channel entry fields for each module type.

TABLE L-4. CHANNEL ENTRY: LENGTHS					
CHANNEL TYPE	BYTES				
PCM INPUT AND OUTPUT	51				
ANALOG INPUT AND	53				
OUTPUT					
PARALLEL INPUT	53				
PARALLEL OUTPUT	56				
TIMECODE INPUT AND	61				
OUTPUT					
VOICE INPUT AND	61				
OUTPUT					
BIT SYNC INPUT	61				

	TABLE E	5. PCM INP	UFCHANNEBS#14 TX##### 12482
FIELD	BYTES	FORMAT	DESCRIPTION
*CHANNEL TYPE	2	BINARY	1 = 8 BIT PCM INPUT
			8 = 20 MBIT PCM INPUT
MAPPED CHANNEL	2	BINARY	INDEX OF THE CHANNEL THIS
			CHANNEL IS MAPPED TO. IF THE
			CHANNEL IS NOT MAPPED, THE
*ENABLED		4.6.677	INDEX IS -1.
ENABLED	1	ASCII	IF ENABLED, THE CHANNEL IS
ACTUAL RATE	4	DDIADA	RECORDED ("Y" OR "N").
ACTUAL RATE	4	BINARY	ACTUAL WORD RATE IN WORDS
WORDS PER FRAME	4	BINARY	PER SECOND.
INPUT MODES	1	BINARY	NUMBER OF WORDS PER FRAME.
INI OI MODES	1	BINARY	IF BIT 0 (LSB) SET, SOURCE B
			DATA; ELSE SOURCE A. IF BIT 1 SET, NRZ-L; ELSE BIPHASE-L. IF
			BIT 2 SET, 0 DEGREE CLOCK; ELSE
			90 DEGREE CLOCK.
RESERVED	3	N/A	N/A
BITS PER WORD	2	BINARY	16 BITS.
BITS PRECEDING	4	BINARY	NUMBER OF BITS IN THE FRAME
·			THAT MUST PRECEDE THIS
+CVI A > D TO I > D TO I			CHANNEL.
*CHANNEL NUMBER	2	BINARY	CHANNEL ON MODULE (0-3).
*MODULE ID	1	BINARY	MODULE ID = HEX 11
RESERVED	1	N/A	N/A
*REQUESTED RATE	4	BINARY	REQUESTED BITS PER SECOND
DESCRIPTION	20	AGGT	(INTEGER).
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION.

TARIEJ	6 ANALC)(G-INDEHE AN	ID OUTPUT CHANNELS
(1) Company of the Co			
FIELD	BYTES	FORMAT	DESCRIPTION
CHANNEL TYPE	2	BINARY	2 = 8 MBIT PCM OUTPUT
			9 = 20 MBIT PCM OUTPUT
MAPPED CHANNEL	2	BINARY	INDEX OF THE CHANNEL THIS
			CHANNEL IS MAPPED TO . IF THE
			CHANNEL IS NOT MAPPED, THE
			INDEX IS -1.
ENABLED	1	ASCII	IF ENABLED, THE CHANNEL IS
			RECORDED ("Y" OR "N").
ACTUAL RATE	4	BINARY	ACTUAL WORD RATE IN WORDS
			PER SECOND.
WORDS PER FRAME	-4	BINARY	NUMBER OF WORDS PER FRAME.
OUTPUT MODES	1	BINARY	IF BIT 0 (LSB) SET, BURST MODE.
			IF BIT 1 SET, BIPHASE; ELSE NRZ-
			L.
RESERVED	3	N/A	N/A
BITS PER WORD	2	BINARY	NUMBER OF BITS PER WORD.
BITS PRECEDING	4	BINARY	NUMBER OF BITS IN THE FRAME
			THAT MUST PRECEDE THIS
			CHANNEL.
CHANNEL NUMBER	2	BINARY	CHANNEL ON MODULE (0-3).
MODULE ID	1	BINARY	MODULE ID = HEX 21
RESERVED	1	N/A	N/A
REQUESTED RATE	4	BINARY	REQUESTED BITS PER SECOND.
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION.

TABLET.	7. ANAL()GINPUE AR	nd output grannibus 2.2.2.2.2.2.2.2.
FIELD	BYTES	FORMAT	DESCRIPTION
*CHANNEL TYPE	2	BINARY	5 = LF ANALOG INPUT
	•		6 = HF ANALOG INPUT
			7 = ANALOG OUTPUT
MAPPED CHANNEL	2	BINARY	INDEX OF THE CHANNEL THIS
			CHANNEL IS MAPPED TO. IF THE
	,		CHANNEL IS NOT MAPPED, THE
·			INDEX IS -1.
*ENABLED	1	ASCII	IF ENABLED, THE CHANNEL IS
			RECORDED ("Y" OR "N").
ACTUAL RATE	4	BINARY	ACTUAL SAMPLE RATE IN
			SAMPLES PER SECOND.
SAMPLES PER	4	BINARY	NUMBER OR SAMPLES PER
FRAME	,		FRAME.
FILTER NUMBER	1	BINARY	0 = FILTER 1
·			1 = FILTER 2
			2 = FILTER 3
			3 = FILTER 4
RESERVED	3	N/A	N/A
*BITS PER SAMPLE	2	BINARY	NUMBER OF BITS PER SAMPLE (8
DEGENERAL			OR 12).
RESERVED	4	N/A	N/A
*CHANNEL NUMBER	2	BINARY	CHANNEL ON MODULE (0-3).
*MODULE ID	1	BINARY	MODULE ID = 34 HEX (LF) OR 33
			HEX (HF)
RESERVED	1	N/A	N/A
*REQUESTED RATE	4	BINARY	REQUESTED SAMPLES PER
			SECOND.
RESERVED	2	N/A	N/A
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION

TAR	UFIL8	PARALI EL I	NPUT CHANNELS = 2
FIELD	BYTES	FORMAT	
*CHANNEL TYPE	2	BINARY	13 = NEW PARALLEL INPUT
MAPPED CHANNEL	2	BINARY	INDEX OF THE CHANNEL THIS
			CHANNEL IS MAPPED TO. IF THE
		·	CHANNEL IS NOT MAPPED, THE
			INDEX IS -1.
*ENABLED	1	ASCII	IF ENABLED, THE CHANNEL IS
			RECORDED ("Y" OR "N").
ACTUAL RATE	4	BINARY	ACTUAL WORDS PER SECOND.
WORDS PER FRAME	4	BINARY	NUMBER OF WORDS PER FRAME.
RESERVED	4	N/A	N/A
BITS PER WORD	2	BINARY	NUMBER OF BITS PER WORD
WORDS PRECEDING	. 4	BINARY	NUMBER OF WORDS IN THE
			FRAME THAT MUST PRECEDE THIS
			CHANNEL.
*CHANNEL NUMBER	2	BINARY	CHANNEL ON MODULE (0-3).
*MODULE ID	1	BINARY	MODULE ID = HEX 92
RESERVED	1	N/A	N/A
*REQUESTED RATE	4	BINARY	REQUESTED WORDS PER SECOND.
INPUT MODE	1	BINARY	0 = FOUR 8-BIT CHANNELS
			1 = ONE 16-BIT, TWO 8-BIT
			(CURRENTLY UNAVAILABLE) 2 = TWO 16-BIT (CURRENTLY
·			_ _
			UNAVAILABLE) 3 = ONE 32-BIT (CURRENTLY
			UNAVAILABLE)
			4 = ONE 24-BIT, ONE 8-BIT
			(CURRENTLY UNAVAILABLE)
RESERVED	1	N/A	N/A
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION.

TA	BLETL-9.	PARALLEL (DUTPUT CHANNEES
FIELD	BYTES	FORMAT	DESCRIPTION
CHANNEL TYPE	2	BINARY	
MAPPED CHANNEL	2	BINARY	14 = NEW PARALLEL OUTPUT
WHATED CHARGE	2	DINAKI	INDEX OF THE CHANNEL THIS
			CHANNEL IS MAPPED TO. IF THE
			CHANNEL IS NOT MAPPED, THE INDEX IS -1.
ENABLED	1	ASCII	IF ENABLED, THE CHANNEL IS
			RECORDED ("Y" OR "N").
ACTUAL RATE	4	BINARY	ACTUAL WORD RATE IN WORDS PER
			SECOND.
WORDS PER FRAME	4	BINARY	NUMBER OF WORDS PER FRAME.
RESERVED	4	N/A	N/A
BITS PER WORD	2	BINARY	NUMBER OF BITS PER WORD.
WORDS PRECEDING	4	BINARY	NUMBER OF WORDS IN THE FRAME
			THAT MUST PRECEDE THIS
			CHANNEL.
CHANNEL NUMBER	2	BINARY	CHANNEL ON MODULE (0-3).
MODULE ID	1	BINARY	MODULE ID = HEX A2
RESERVED	1	N/A	N/A
REQUESTED RATE	4	BINARY	REQUESTED WORDS PER SECOND.
OUTPUT MODE	1	BINARY	0 = FOUR 8-BIT CHANNELS
			1 = ONE 16-BIT, TWO 8-BIT
			2 = TWO 16-BIT CHANNELS
			3 = ONE 32-BIT CHANNEL
			4 = ONE 24-BIT, ONE 8-BIT
RECONSTRUCT	1	BINARY	7 = TWO 8-BIT DCRSI MODE
MODE	1	DINAKI	0 = DATA IS FROM MODULE OTHER THAN PARALLEL INPUT.
111022		·	1 = DATA IS FROM PARALLEL INPUT.
			NOT VALID ONLY FOR OUTPUT
			MODE.
DCRSI OUTPUT	1	BINARY	0 = HEADER AND DATA
			1 = HEADER ONLY
			3 = DATA ONLY
			VALID ONLY FOR OUTPUT MODE 7.
BURST SELECT	1	BINARY	0 = CONSTANT
			1 = BURST
HANDSHAKE	1	BINARY	0 = DISABLE HANDSHAKING
SELECT			1 = ENABLE HANDSHAKING
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION.

BLE L-10). TIME COD	E INPUT CHANNELS
DVEEC	EODMAT	DESCRIPTION
2	BINARY	TIME CODE MUST APPEAR AS A
		GROUP OF 3 CHANNELS, EVEN
		THOUGH THE USER INTERFACE
		ONLY DISPLAYS A SINGLE
		CHANNEL. THE RESPECTIVE TYPES
		ARE 15, 19, AND 20.
2	BINARY	INDEX OF THE CHANNEL THIS
		CHANNEL IS MAPPED TO. IF THE
		CHANNEL IS NOT MAPPED, THE
		INDEX IS -1.
1	ASCII	"Y" OR "N"
4	BINARY	1
4	BINARY	1
4	N/A	N/A
2	BINARY	24 FOR CHANNEL TYPE 15
		24 FOR CHANNEL TYPE 19
		16 FOR CHANNEL TYPE 20
4	N/A	N/A
2	BINARY	0 FOR CHANNEL TYPE 15
	· ·	1 FOR CHANNEL TYPE 19
		2 FOR CHANNEL TYPE 20
1	BINARY	MODULE ID = HEX B1
1	N/A	N/A
4	BINARY	1
		·
2	BINARY	24 FOR CHANNEL TYPE 15
		24 FOR CHANNEL TYPE 19
		16 FOR CHANNEL TYPE 20
20	ASCII	CHANNEL DESCRIPTION
4	N/A	N/A
1	BINARY	0-GENERATE TIME
1		1-USE EXTERNAL IRIG SOURCE
	2 1 4 2 1 1 4 2 2 20 4 20 4	2 BINARY 1 ASCII 4 BINARY 4 BINARY 4 N/A 2 BINARY 1 BINARY 1 N/A 2 BINARY 2 BINARY 2 BINARY 1 N/A 4 BINARY 2 BINARY

Property Control	SEE LEU.		DUNPUTERANNERS & CONTROL CONTROL
			10 to the state of
FIELD	BYTES	FORMAT	DESCRIPTION
CHANNEL TYPE	2	BINARY	TIME CODE MUST APPEAR AS A
			GROUP OF 3 CHANNELS, EVEN
			THOUGH THE USER INTERFACE
			ONLY DISPLAYS A SINGLE
			CHANNEL. THE RESPECTIVE
A CARDED GIVAN			TYPES ARE 17, 21 AND 22.
MAPPED CHANNEL	2	BINARY	INDEX OF THE CHANNEL THIS
	<u> </u>	•	CHANNEL IS MAPPED TO. IF THE
,			CHANNEL IS NOT MAPPED, THE
THEFT			INDEX IS -1.
ENABLED	11	ASCII	"Y" - ENABLED, OR "N" - DISABLED
ACTUAL RATE	4	BINARY	1
SAMPLES PER	4	BINARY	1
FRAME			
RESERVED	4	N/A	N/A
BITS PER WORD	2	BINARY	24 FOR CHANNEL TYPE 17
			24 FOR CHANNEL TYPE 21
DECEDVED		-	16 FOR CHANNEL TYPE 22
RESERVED	4	N/A	N/A
CHANNEL NUMBER	2	BINARY	0 FOR CHANNEL TYPE 17
NUMBER			1 FOR CHANNEL TYPE 21
MODULE ID		DDIADY	2 FOR CHANNEL TYPE 22
RESERVED	1	BINARY	MODULE ID = HEX B1
REQUESTED	1	N/A	N/A
SAMPLE RATE	4	BINARY	1
BITS PER SAMPLE	2	DDIADX	OA FOR CITAIN THE
DITOTER SAMIFLE	2	BINARY	24 FOR CHANNEL TYPE 17
			24 FOR CHANNEL TYPE 21
DESCRIPTION	20	ASCII	16 FOR CHANNEL TYPE 22
RESERVED	4	N/A	CHANNEL DESCRIPTION N/A
TCO MODE	1	BINARY	
	1	DILAYK I	0 - GENERATE TIME
·			1 - USE TIME FROM RECORDED
RESERVED	3	N/A	N/A
		11/1/1	11/1

	TABLE L	12. VOICE I	NPUT CHANNEL:
FIELD	BYTES	FORMAT	DESCRIPTION
*CHANNEL TYPE	2	BINARY	16
MAPPED CHANNEL	2	BINARY	INDEX OF THE CHANNEL THIS
			CHANNEL IS MAPPED TO. IF THE
			CHANNEL IS NOT MAPPED, THE
			INDEX IS -1.
*ENABLED	1	ASCII	"Y" - ENABLED, OR "N" - DISABLED
ACTUAL RATE	4	BINARY	ACTUAL SAMPLE RATE IN
·			SAMPLES PER SECOND
SAMPLES PER	4	BINARY	NUMBER OF SAMPLES PER FRAME
FRAME			
RESERVED	4	N/A	N/A
*BITS PER WORD	2	BINARY	8
RESERVED	4	N/A	N/A
*CHANNEL	2	BINARY	3
NUMBER			
*MODULE ID	1	BINARY	MODULE ID = HEX B1
RESERVED	1	N/A	N/A
*REQUESTED	4	BINARY	2K, 5K, 10K, 20K, 50K, OR 100K
SAMPLE RATE			
*BITS PER SAMPLE	2	BINARY	8
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION
RESERVED	1	N/A	N/A
VOLTAGE GAIN	2	BINARY	0 - GAIN OF 1
			1 - GAIN OF 2
		<u> </u> .	2 - GAIN OF 4
			3 - GAIN OF 8
RESERVED	.5	N/A	N/A

	ABLEACT	SE W o lfde.ot	TERUT CHAMMBES (1997)
FIELD	BYTES	FORMAT	DESCRIPTION
CHANNEL TYPE	2	BINARY	18
MAPPED CHANNEL	2	BINARY	INDEX OF THE CHANNEL THIS
			CHANNEL IS MAPPED TO. IF THE
	, , , , ,	·	CHANNEL IS NOT MAPPED, THE
			INDEX IS -1
ENABLED	1	ASCII	"Y" - ENABLED, OR "N" - DISABLED
ACTUAL RATE	4	BINARY	ACTUAL SAMPLE RATE IN
			SAMPLES PER SECOND
SAMPLES PER	4	BINARY	NUMBER OF SAMPLES PER FRAME
FRAME			
RESERVED	4	N/A	N/A
BITS PER WORD	2	BINARY	8
RESERVED	4	N/A	N/A
CHANNEL	2	BINARY	3
NUMBER			
MODULE ID	1	BINARY	MODULE ID = HEX B1
RESERVED	1	N/A	N/A
REQUEST SAMPLE	4	BINARY	NUMBER OF SAMPLES PER SECOND
RATE			<u>.</u>
BITS PER SAMPLE	2	BINARY	8
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION
RESERVED	8	N/A	N/A

7	ADFET 1	A PIT SVNC	INPUT CHANNELS:
	ADLL L-1	T. DII 01110	THE CONTRACT OF THE CONTRACT O
FIELD	BYTES	FORMAT	DESCRIPTION
CHANNEL TYPE	2	BINARY	23
RESERVED	2	N/A	N/A
ENABLED	1	ASCII	"Y" - ENABLED, OR "N" - DISABLED
ACTUAL RATE	4	BINARY	ACTUAL WORD RATE IN WORDS PER SECOND
WORDS PER FRAME	4	BINARY	NUMBER OR WORDS PER FRAME
RESERVED	4	N/A	N/A
BITS PER WORD	2 .	BINARY	16
RESERVED	4	N/A	N/A
CHANNEL	2	BINARY	CHANNEL ON MODULE (0-3)
NUMBER			
MODULE ID	1	BINARY	MODULE ID = HEXADECIMAL 13
RESERVED	1	N/A	N/A
REQUESTED RATE	4	BINARY	BITS PER SECOND
DESCRIPTION	20	ASCII	CHANNEL DESCRIPTION
INSTALLED	1	BINARY	0 - DAUGHTER BOARD NOT INSTALLED 1 - DAUGHTER BOARD INSTALLED
PCM GEOG. ADDRESS	1	BINARY	GEOGRAPHICAL ADDRESS OF THE ASSOCIATED PCM INPUT CHANNEL
SOURCE CLOCK	1	BINARY	0 - SOURCE A 1 - SOURCE B
RESERVED	7	N/A	N/A

2.3 <u>Trailer Section.</u> The trailer section contains the setup description and the checksum (see Tables L-15). Early versions of the setup do not contain this information. The "Setup Keys" field in the header indicates the content of the trailer section.

SELL TABLE LES IRAGEERSECTION FORMAD AND AND AND AND AND AND AND AND AND A			
FIELD	BYTES	FORMA T	DESCRIPTION
SETUP DESCRIPTION	40	ASCII	DESCRIPTION OF THE SETUP
SAVED SCANLIST	VARIE S	BINARY	NUMBER OF BYTES DEPENDS ON THE NUMBER OF CHANNELS BEING RECORDED.
CHECKSUM	4	BINARY	SUM OF ALL SETUP BYTES.

2.4 <u>Saved Scan-list Structure</u>. This is an array of enabled input channels that make up the calculated scan-list. Each element of the array is made up of two fields, an index field and a count field. The length of the index fields is one byte, and the length of the count field is two bytes.

The index field, which is 1-based, is determined by the position of the channel's module in the ARMOR system. The first input channel found in the ARMOR system is assigned an index of 1, the next input channel is assigned a 2, and so on. The search for input modules starts at slot 1. Filler bytes are assigned an index value of 255.

The count field is the number of words/samples per frame that is assigned to that input channel.

2.5 <u>Creating a Setup Block.</u> Creating a Setup Block involves two steps. In the first step, the user creates an "input" setup block file as described below in this section. Most of the fields in the input setup block file are unspecified (filled with zeros). In the second step, the input setup block file is read by the ARMOR Compiler program that produces a new setup block file with all the unspecified fields initialized to the appropriate values. In other words, a setup block has two types of fields, user specified and compiler generated. Note that all compiler generated fields must be provided in the input setup block file and initialized with zeros prior to executing the ARMOR compiler program.

The rules presented in this section must be explicitly followed to create an ARMOR input setup block. Values for fields identified in the previous tables with an asterisk preceding the field name must be provided. In some cases the values for these required fields are constant and are specified in the tables above. In other cases, the user must provide the desired value. All fields with names not identified with asterisks must be initialized to binary zero. This includes both "unused" and "reserved" fields.

Only input channel information entries are required. Output channel information entries are ignored by the ARMOR Compiler program.



2.5.1 Header Section.

Setup Length Count the total numbers of bytes in the created setup block and put the

value here.

Setup Keys Set bit 0 = 1 if the trailer contains a description. Leave other bits = 0.

Input Count Enter the total number of input channel information entries, including

both enabled and disabled entries.

2.5.2 <u>Channel Section.</u> PCM, Low Frequency (LF) Analog, and parallel input channel information entries must be included in the setup block in groups of four entries per type. High Frequency (HF) analog input channel information entries must be included in the setup block in groups of two entries per type. Time code /voice input channel information entries must be included in groups of three time code entries and one voice entry. Specifying an ASCII "N" in the enabled field must disable all unused input channel information entries. For each channel information entry group, the channel number field of the first entry in the group is 0 (zero), the second entry is 1, the third is 2, and the fourth is 3. For the time code /voice group, the time code entry channel number fields are 0, 1, and 2 respectively, while the voice entry channel number field is 3. HF analog entry channel number fields are 0 and 1 respectively.

Description fields are not required and are not specified below. However, it is advisable to include an ASCII description of each channel for future reference.

2.5.2.1 PCM Input Channels.

Channel Type Binary 8

Enabled ASCII "Y" if enabled, "N" if disabled Channel Number binary 0,1,2, or 3 as described in 2.5.2 above

Module ID Hexadecimal 11

Requested Rate Binary integer rate in bits per second

2.5.2.2 Analog Input Channels.

Channel Type Binary 5 for LF (up to 1 Megasample /sec), 6 for

HF (up to 10 Megasamples/sec)

Enabled "Y" if enabled, "N" if disabled

Bits per Sample 8 or 12

Channel Number 0,1,2, or 3 as described in 2.5.2 above Module ID Hexadecimal 34 (LF) or 33 (HF)

Requested Rate Binary integer 2K, 5K, 10K, 20K, 50K, 100K,

200K, 500K, 1M (LF, HF) 2.5M, 5M, 10M

(HF only)

2.5.2.3 Parallel Input Channels.

Channel Type

Decimal 13

Enabled

"Y" if enabled, "N" if disabled

Channel Number

0,1,2, or 3 as described in 2.5.2 above

Module ID

Hexadecimal 92

Requested Rate

Binary integer 8-bit words (bytes) per second

2.5.2.4 Time Code Input Channels.

Channel Type

Deciaml 15 (1st entry), 19 (2nd entry), 20 (3rd entry)

Enabled

"Y" if enabled, "N" if disabled, all three entries

must be the same

Bits per Word

Deciaml 24 (1st entry), 24 (2nd entry), 16 (3rd entry)

Channel Number

0,1, or 2 as described in 2.5.2 above

Module ID

Hexadecimal B1

Requested Sample Rate

Bits per Sample

Decimal 24 (1st entry), 24 (2nd entry), 16 (3rd entry)

2.5.2.5 Voice Input Channels.

Channel Type

Decimal 16

Enabled

"Y" if enabled, "N" if disabled

Bits per Word

Channel Number

3 as described in 2.5.2 above

Requested Sample Rate

Integer 2K, 5K, 10K, 50K, 100K

Bits per sample

- 2.5.3 Trailer Section. The trailer section of the input setup block is not required. The user may include an ASCII text setup description in the trailer section by setting the setup keys bit 0 = 1 in the header section (see Section 2.5.1 above) and adding the setup description field only in the trailer section.
- 2.5.4 ARMOR Compiler Program. Operational instructions for the ARMOR compiler program are provided in the readme.txt file provided with the compiler (see Section 6.17.3.1).

INDEX

	bus loading8-1
I	bus monitor8-1
1553 Bus Data Attributes9-4, 9-5, 9-50, 9-51, 9-52	C
•	carrier suppression2-7
5	center frequency tolerance2-4
5/6 modulation code6-1	center tracks
0 .	channel bandwidth definitions 2-4
8	channel characteristics3-1, 3-5
8 to 5 conversion 6-54	channel coding 6-59
	channelization2-4
A	channels:standard bandwidth channel 2-4
ADARIO6-22, 6-32	channels:wide bandwidth channel 2-4
aggregate format6-37	class distinctions4-1
alignment, direct electronics 6-29	code frame
alignment, FM electronics6-29	code word digital sum
allocation (of a frequency band)2-1	continuous variable slope delta5-1
alternating tag and data4-7	crossplay
analog channels6-58, 6-61	crosstalk
ARMOR6-56, 6-57, 6-58, 6-59, 6-61, 6-62	CVSD bit rate determination 5-3
asynchronous data merge4-11	D
asynchronous embedded format4-7	-
attributes	data azimuth (dynamic)6-2
airborne hardware9-4, 9-5, 9-71	data bits
data conversion 9-4, 9-5, 9-20, 9-39, 9-50,	data blocks
9-60, 9-61	data bus8-1
authorization2-1	data randomization2-6
azimuth6-43	data scatter6-2
י מ	data spacing
В	data storage
B format 6-40	data zone 6-46
back coating7-1	decoding technique5-1
band-limited audio5-1	defined parameters 6-36
bandwidths:occupied bandwidth2-1	demultiplex
base7-1, 7-6	demultiplexer/demodulator
basic dimension6-1	demux FILL requirement
bias level7-2, 7-8, 7-12	deviation direction
bias recording6-3	differential encoding2-5, 2-6
bias signal, high frequency6-1	digital cassette 6-40
bi-directional7-2	digital cassette helical scan
binary bit representation4-2	digital data attributes
binder7-2, 7-7	digital sum variation
bi-phase 6-2	digitized audio
bit error6-2	dimensional specifications
bit jitter4-2	direct electronics
bit numbering4-4	direct record parameters6-18 direct recording6-3, 6-18, 6-29
bit packing density, linear6-2	
bit rate4-2	double-density recording
bit slip6-2	dropout
bit-oriented4-1, 4-2	dual redundant data bus8-
blocking7-2	durability7-10, 7-11, 7-12
buffer overflow tag8-3	E
bus data military standard4-7	
bus error 8-1	E format
1 - 11151	ECC 6-46 6-48 6-49 6-50 6-52 6-54 6-55

ECC code word6-3	head reference plane 6-4
edge margin6-3	head segment6-16, 6-17
edge margin minimum6-3	head segment gap azimuth 6-4, 6-5
edge tracks7-2, 7-12	head segment location 6-16
encoder output bit rate5-2	head segment numbering 6-5
encoding technique5-1	head segment, record or reproduce 6-4
environmental conditions7-7	head spacing6-5
erasure7-2, 7-14	head tilt6-5, 6-17
error correcting code6-3	heads, in-line6-4
error correction6-48	heads, interlaced6-5
E-Value7-2	helical scan6-40, 6-56, 7-14
exchange of data6-50, 6-52	helical track6-5, 6-42, 6-43, 6-47
F	high density digital7-10
r	high order time 8-5, 8-6
filemark track6-44	high resolution7-1, 7-10
fixed formats4-2	high-density digital magnetic tape 7-2
flammable materials7-5	high-density digital recording 6-5
flutter6-3	high-energy magnetic tape
flutter compensation3-5, 3-7, 6-19	high-resolution magnetic tape
flux transition6-3	
flux transition density6-3	I
FM electronics	implied parameters and limits 6-35
FM record parameters 6-24	input/output
FM record systems6-22	insertion process
FM recording6-3	interference
FM reproduce systems6-24	interference limits
FM subcarrier3-1, 3-5	interleave buffer 6-50
format change4-6, 4-7	interleaving 6-5
format structure 6-35	intermediate frequency bandwidths 2-10
format structure change4-7	
format types6-40	L
format validation 6-62	L Band2-2, 2-3
format zone 6-46	layer-to-layer signal transfer7-3, 7-11
FQPSK-B2-5, 2-6, 2-9, 9-12	load point 6-46
fragmented words4-4	logical beginning of tape6-46
frame format identification4-7	logical end of tape6-46
frame structure4-4, 6-57	logical format9-2
frequency division multiplexing3-1	longitudinal recording 6-7
frequency tolerance2-4, 2-9	longitudinal tracks 6-44
G	low order time 8-5, 8-6
	<i>M</i>
gap azimuth6-3, 6-5	MI
gap azimuth alignment 6-17	magnetic oxide coating 7-3
gap length6-4, 6-17	magnetic tape 6-18, 6-28, 7-2, 7-3, 7-14
gap parameters6-17	major frame
gap scatter6-16	manufacturer's centerline tape7-3, 7-4
gap scatter (record head) 6-4	manufacturer's secondary centerline tape7-3, 7-4
gap scatter (reproduce head) 6-4	maximum burst length8-1
group relationships9-5	measurement list change 4-7
guard band6-4, 6-40, 6-44	mechanical parameters 6-16
H	microsecond time 8-5, 8-6
	minor frame4-4, 4-6
head (record or reproduce) 6-4	minor frame composition4-4
head designation6-4	minor frame length 4-4
head identification6-16	minor frame numbering 4-6
head location 6-16	minor frame synchronization 4-4
head placement6-16	miscellaneous information inclusion 6-54
head polarity6-17	modulated transmitter bandwidth 2-8

modulation code6-56	recorder alignment 6-29
nodulation noise7-3, 7-11, 7-12	recorder/reproducer input and output 6-30
nodulation polarity2-7	recording density 6-44
multiplex/demultiplex6-32, 6-56	recording geometry 6-43
multiplex/modulation attributes9-4, 9-20, 9-21	recording standards 6-29
multiplexer format6-57	reel characteristics6-18, 6-22
•	reels and hubs7-5
N .	reference tape edge6-6
non-return-to-zero-level6-5	reference tape system7-4
non-operating environment7-7	reference track location6-6
•	reproduce bandwidths 6-7
0	reproduce parameters6-19, 6-22, 6-28
operating environment7-7	reproduce-head segment6-17
operational flexibility2-8, 2-10	RF bandwidth definitions:standard bandwidth
organization9-4	signal2-4
output power2-4, 2-5, 2-7	RF bandwidth definitions:wide bandwidth signal
• •	2-4
P	S
pacer divisor calculation 6-58	22.22
packaging7-5	S Band2-2, 2-3
parallel channels6-61	scanner 6-6
parity bit4-11	scatterwind7-3, 7-8
PCM channels6-58, 6-60	secondary service2-2, 2-3
PCM codes 6-25	serial bit stream transitions4-2
PCM data stream9-25	serial high-density digital recording 6-25
PCM data word format4-11	servo track
PCM format attributes 9-1, 9-4, 9-5, 9-25, 9-26, 9-	setup block format 6-56
27, 9-28, 9-42, 9-52	shedding
PCM measurement descriptions9-4, 9-39	short wavelength output uniformity7-4, 7-9
PCM recording6-24	signal source5-1
PCM signature6-28	source signal8-2
phase equalizer6-28	speed control and compensation 6-24
physical dimensions6-43	spurious emissions2-7, 2-9
physical format9-2	spurious responses
physical recording density6-5	stale data bit4-12
physical relationships6-42	standard record level
plasticizing7-3	subcommutation
post-detection PCM recording6-24	subframe
preamble recording6-29	subframe synchronization
predetection6-20, 6-22, 6-24	submultiplex
primary data channel6-37	submux FILL requirement
primary service2-2, 2-3	supercommutation 4-6 sync pattern 6-48, 6-59
principal block6-5, 6-6	system emissions2-8
print through	system emissions2-6
pulse code modulation4-1, 6-22	T
Q	tagged data format 4-7
	tape and cassettes
quadrature modulator2-6	tape cartridge6-40, 6-46
R	tape copying6-28
radial clearance7-5	tape format 6-7
radio frequency2-1, 2-7	tape guidance 6-18
radio frequency standards for telemetry 2-1	tape guiding6-18
receiver phase noise2-9	tape reference edge 6-43
receiver systems2-1, 2-9	tape signature recording6-20
record bandwidths	tape skew 6-6
record level7-3, 7-8, 7-12	tape source attributes 9-4, 9-5, 9-15, 9-16, 9-17
record level set frequency	•
record level set medacite's	

